


LBS Bilateral Amplifier Crystal Filter Input - terminated in 50 ohm load

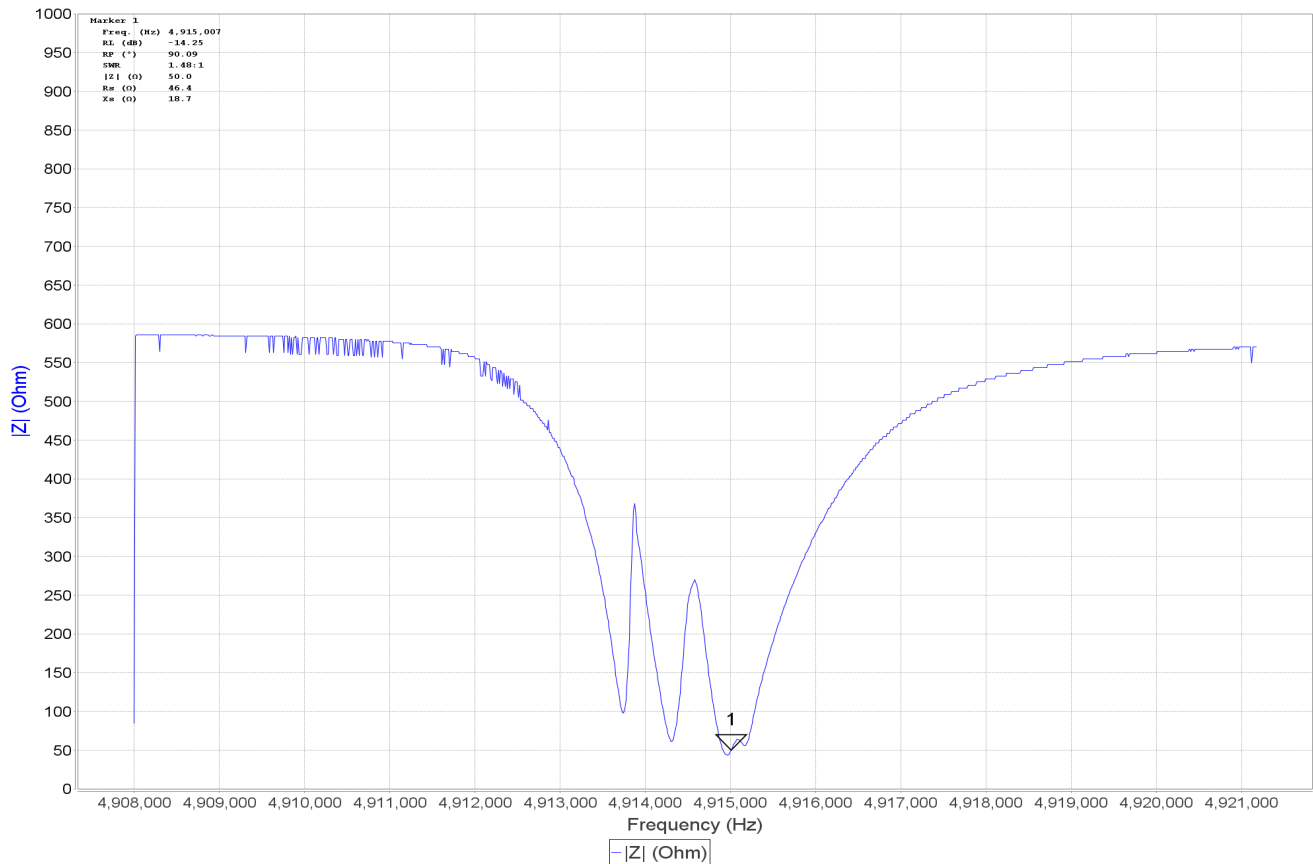

Marker	Freq. (Hz)	RL (dB)	RP (°)	Z ()	Rs ()	Xs ()	Theta	SWR
1	4,915,007	-14.25	90.09	50.0	46.4	18.7	21.9	1.48:1

Comment:

Date: 10/4/18 7:21 PM

Mode: Reflection

Analyser: miniVNA / mini radio solutions - miniVNA

Scan

Start: 4908000 / 4,908,000

Stop: 4921182 / 4,921,182

Samples: 1014

Overscan: 1

Calibration

Samples: 2000

Overscan: 0

File: REFL_miniVNA.cal

User: Michael

Headline: LBS Bilateral Amplifier Crystal Filter Input - terminated in 50 ohm load

Port extension len: <not set>m

Port extension vf: <not set>