


# LBS Bilateral Amplifier Crystal Filter Input - direct connection - no transformer on input & terminated in 50 ohm load on output

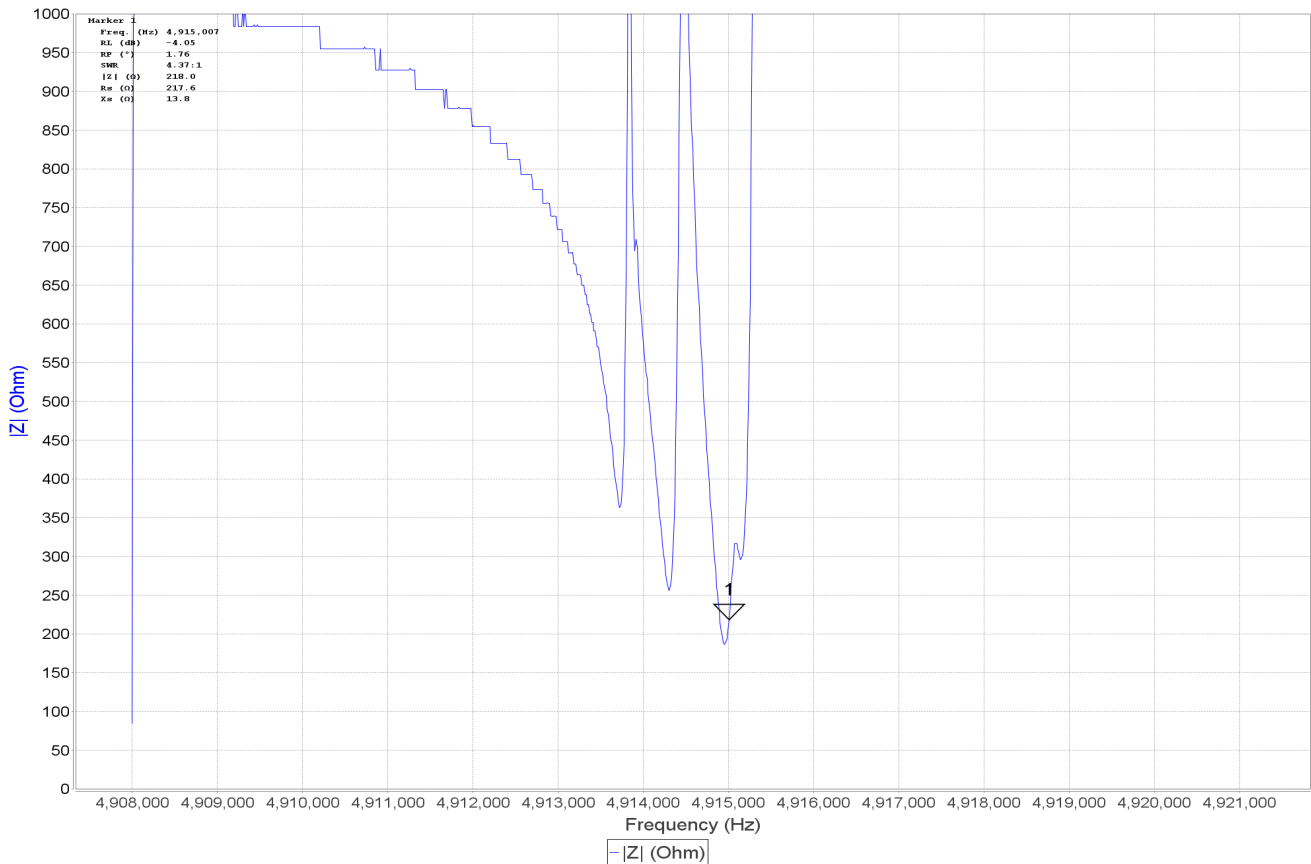

Marker	Freq. (Hz)	RL (dB)	RP (°)	Z  (Ω)	Rs (Ω)	Xs (Ω)	Theta	SWR
1	4,915,007	-4.05	1.76	218.0	217.6	13.8	3.6	4.37:1

## Comment:

Date: 10/4/18 7:45 PM

Mode: Reflection

Analyser: miniVNA / mini radio solutions - miniVNA

Scan

Start: 4908000 / 4,908,000

Stop: 4921182 / 4,921,182

Samples: 1014

Overscan: 1

Calibration

Samples: 2000

Overscan: 0

File: REFL\_miniVNA.cal

User: Michael

Headline: LBS Bilateral Amplifier Crystal Filter Input - direct connection - no transformer on input & terminated in 50 ohm load on output

Port extension len: <not set>m

Port extension vf: <not set>