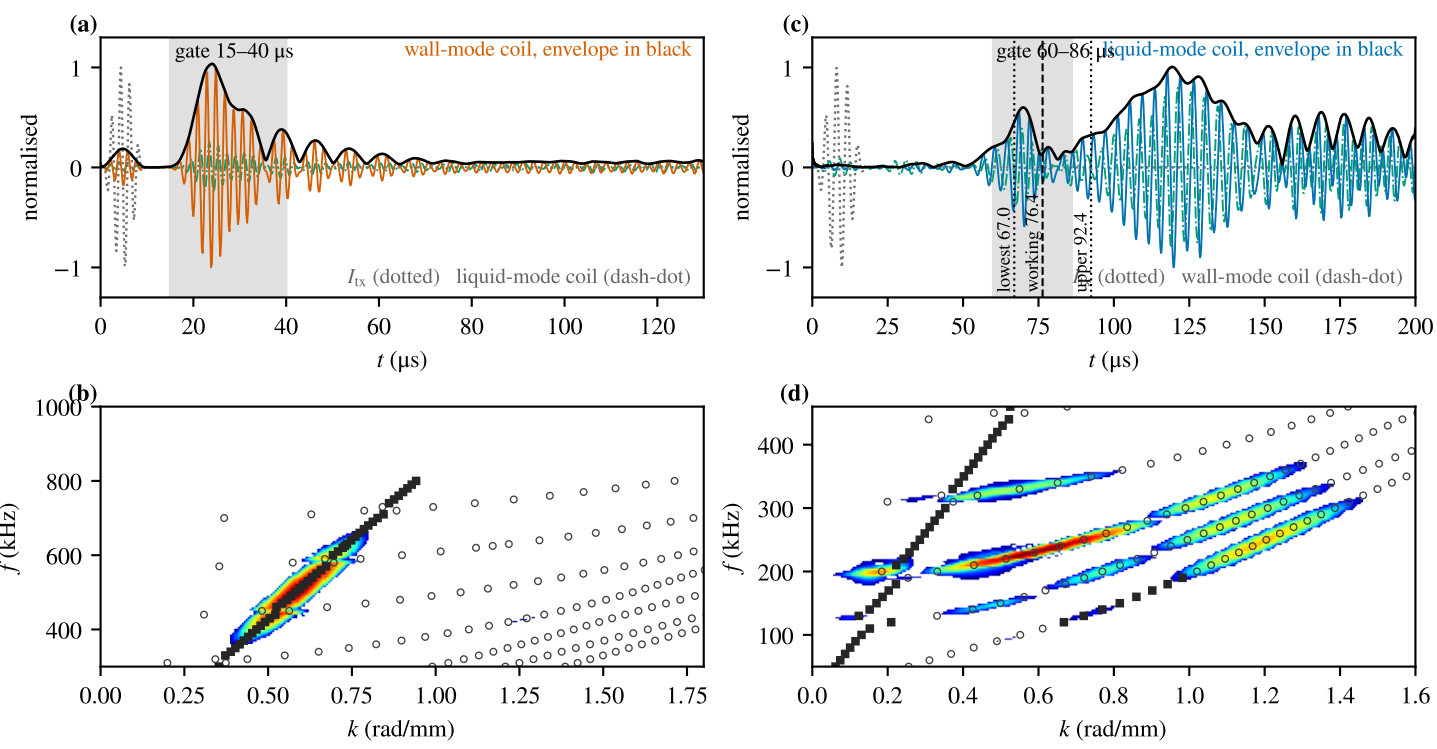

(a)
gate 15–40 µs
wall-mode coil, envelope in black
normalised
I_{tx} (dotted) liquid-mode coil (dash-dot)
t (µs)
(c)
gate 60–86 µs
liquid-mode coil, envelope in black
lowest 67.0
working 76.4
upper 92.4
(dotted) wall-mode coil (dash-dot)
(b)
f (kHz)
k (rad/mm)
(d)