


## Arm Kinematics

The next part of the analysis is the ATC arm. The arm's responsibility is to position the end effector gripper in the correct position. Below is the kinematic chain of the arm.

The

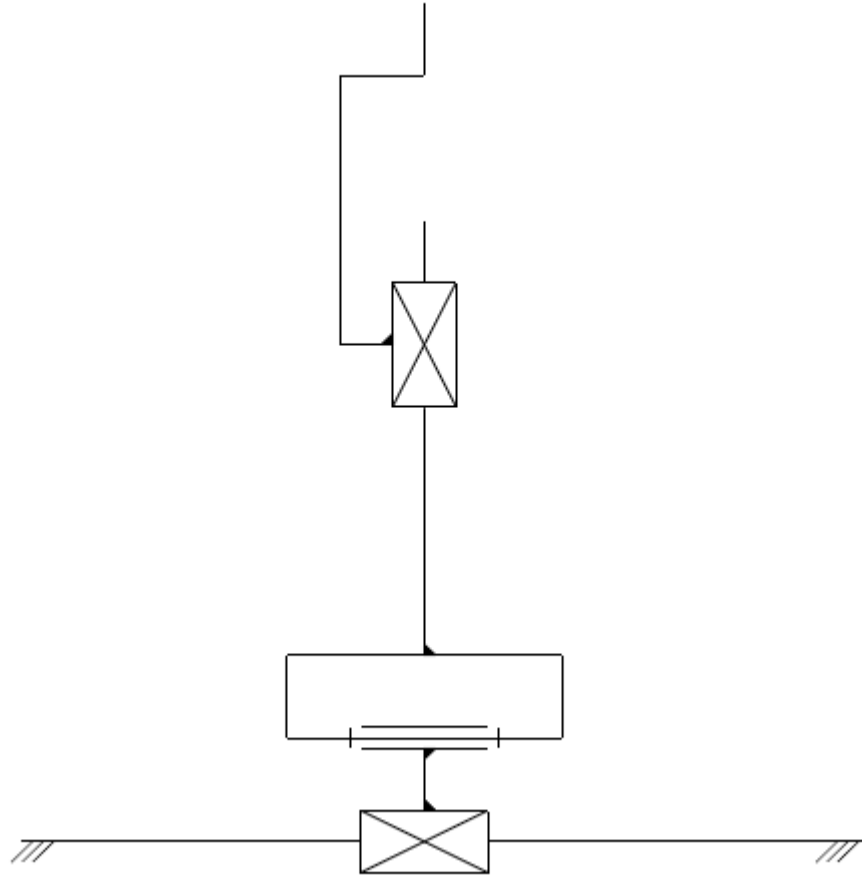

manipulator is comprised of 3 class V kinematic pairs. We may now use the equation for the number of

degrees of freedom:  $w = 6n - \sum_{i=1}^5 ip_i$  where,

w – number of degrees of freedom


n – number of movable links

$p_i$  – number of pairs of class i

$w = 6 \times 3 - 5 \times 3 = 3$ , we conclude that our system has three degrees of freedom.

The first degree of freedom will mimic the Cartesian styled machine in the x-axis. It is responsible for manoeuvring to the correct location in the magazine. The second motion is rotational, which is responsible for leaving the magazine area and into the head change zone. The final degree of freedom is once again linear. This final movement is what will be applying and removing the tools. The final element will be the end effector, which will only add one more degree of motion to our complete system.

We will be using the Denavit-Hartenberg notation to calculate the **forward kinematics** of our ATC arm.

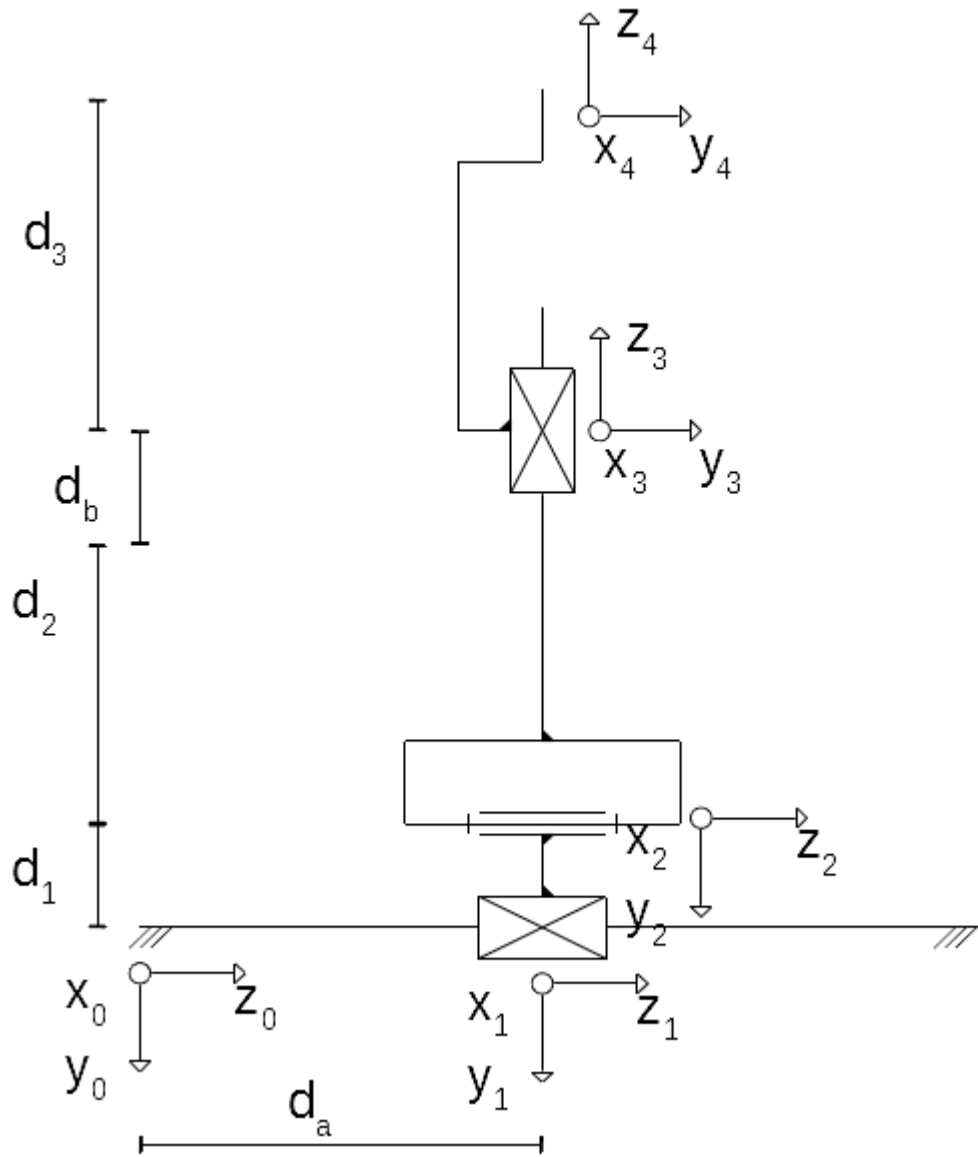

	$\theta_i$	$d_i$	$a_i$	$\alpha_i$
1	0	$d_{a, var}$	0	90
2	0	$d_1$	0	-90
3	$\theta_{1, var}$	0	0	90
4	0	$d_{b, var} + d_2$	0	0
5	0	$d_3$	0	0

The main formula is below

$$A_i = Rot_{z, \theta_i} Trans_{z, d_i} Trans_{x, a_i} Rot_{x, \alpha_i} =$$

$$= \begin{bmatrix} \cos(\theta_i) & -\sin(\theta_i) & 0 & 0 \\ \sin(\theta_i) & \cos(\theta_i) & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & d_i \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 & a_i \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & \cos(\alpha_i) & -\sin(\alpha_i) & 0 \\ 0 & \sin(\alpha_i) & \cos(\alpha_i) & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

We will begin by calculating all five A matrices separately.

$$A_1 = Trans_{z, d_{a, var}} Rot_{x, 90} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & d_{b, var} \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & \cos(90) & -\sin(90) & 0 \\ 0 & \sin(90) & \cos(90) & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & -1 & 0 \\ 0 & 1 & 0 & d_{a, var} \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

$$A_2 = Trans_{z, d_1} Rot_{x, -90} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & d_1 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & \cos(-90) & -\sin(-90) & 0 \\ 0 & \sin(-90) & \cos(-90) & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & -1 & 0 & d_1 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

$$A_3 = Rot_{z, \theta_{1, var}} Rot_{x, 90} = \begin{bmatrix} \cos(\theta_{1, var}) & -\sin(\theta_{1, var}) & 0 & 0 \\ \sin(\theta_{1, var}) & \cos(\theta_{1, var}) & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & \cos(90) & -\sin(90) & 0 \\ 0 & \sin(90) & \cos(90) & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} =$$

$$= \begin{bmatrix} \cos(\theta_{1, var}) & 0 & \sin(\theta_{1, var}) & 0 \\ \sin(\theta_{1, var}) & 0 & -\cos(\theta_{1, var}) & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

$$A_4 = Trans_{z, d_{b, var} + d_2} \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & d_{b, var} + d_2 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

$$A_5 = Trans_{z, d_3} \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & d_3 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

$$A_{5,0} = A_1 A_2 A_3 A_4 A_5 = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & -d_1 \\ 0 & 0 & 1 & d_{a, var} \\ 0 & 0 & 0 & 1 \end{bmatrix} A_3 A_4 A_5 = \begin{bmatrix} \cos(\theta_{1, var}) & 0 & \sin(\theta_{1, var}) & 0 \\ \sin(\theta_{1, var}) & 0 & -\cos(\theta_{1, var}) & -d_1 \\ 0 & 1 & 0 & d_{a, var} \\ 0 & 0 & 0 & 1 \end{bmatrix} A_4 A_5 =$$

$$= \begin{bmatrix} \cos(\theta_{1,var}) & 0 & \sin(\theta_{1,var}) & (d_{b,var}+d_2)\sin(\theta_{1,var}) \\ \sin(\theta_{1,var}) & 0 & -\cos(\theta_{1,var}) & -(d_{b,var}+d_2)\cos(\theta_{1,var})-d_1 \\ 0 & 1 & 0 & d_{a,var} \\ 0 & 0 & 0 & 1 \end{bmatrix} =$$

$$= \begin{bmatrix} \cos(\theta_{1,var}) & 0 & \sin(\theta_{1,var}) & (d_{b,var}+d_2+d_3)\sin(\theta_{1,var}) \\ \sin(\theta_{1,var}) & 0 & -\cos(\theta_{1,var}) & -(d_{b,var}+d_2+d_3)\cos(\theta_{1,var})-d_1 \\ 0 & 1 & 0 & d_{a,var} \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

$$A_{5,0} = \begin{bmatrix} \cos(\theta_{1,var}) & 0 & \sin(\theta_{1,var}) & (d_{b,var}+d_2+d_3)\sin(\theta_{1,var}) \\ \sin(\theta_{1,var}) & 0 & -\cos(\theta_{1,var}) & -(d_{b,var}+d_2+d_3)\cos(\theta_{1,var})-d_1 \\ 0 & 1 & 0 & d_{a,var} \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

To check if our equations make any physical sense, we may substitute some parameters.

Let  $d_1, d_2, d_3, d_a, d_b=2$  and  $\theta_1=0$  ;

$$\text{so, } A_{5,0} = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & -1 & -8 \\ 0 & 1 & 0 & 2 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

The position matrix shows us that the coordinates of the end effector are (0, -8, 2) with respect to the original coordinate system, which are the anticipated results. Similarly, the rotation matrix shows that the new Y axis is in the orientation of the old Z axis and the new Z axis took the orientation of the old Y in the opposite direction.

Based on this quick analysis, we may conclude that our calculations are correct and we may progress to the **inverse kinematics**.