

Environment II | four saved dual-ABB trajectories

Start, saved midpoint, and goal snapshots from previously qualified discrete node records.


RRT / PCS | start | 1/177

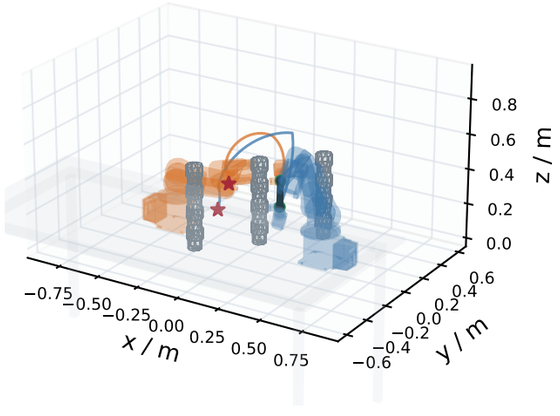


RRT / PCS | saved midpoint | 89/177

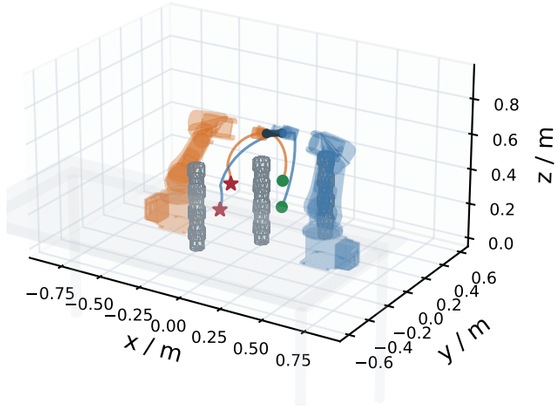


RRT / PCS | goal | 177/177

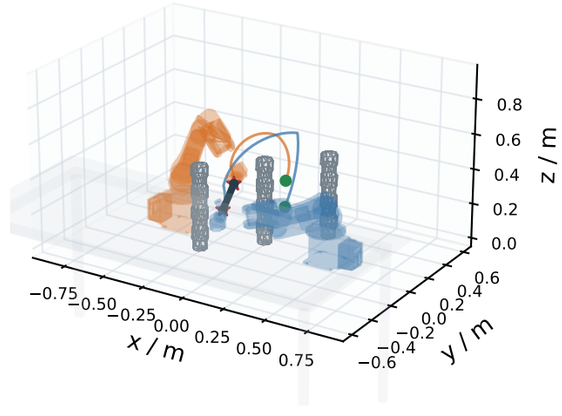


CBiRRT / PCS | start | 1/413

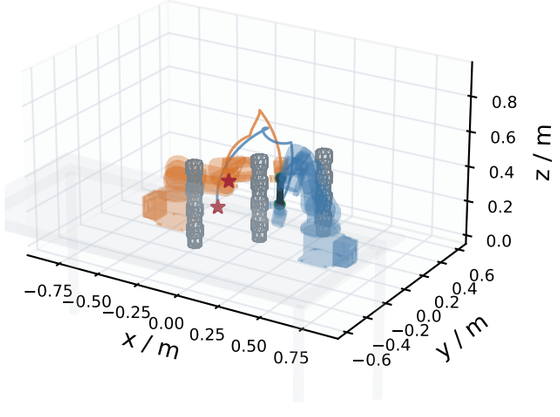


CBiRRT / PCS | saved midpoint | 207/413

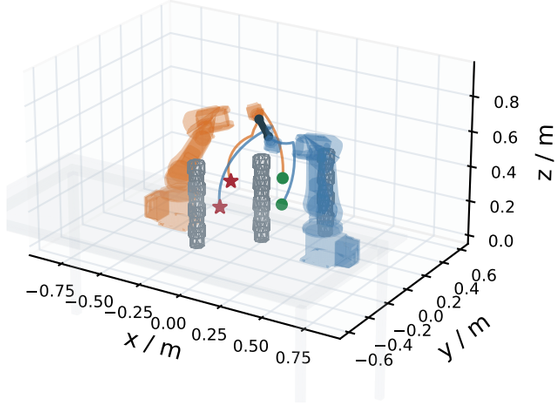


CBiRRT / PCS | goal | 413/413

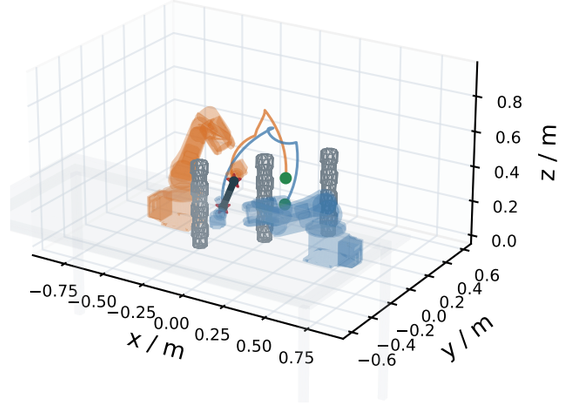


RRT / NR | start | 1/393

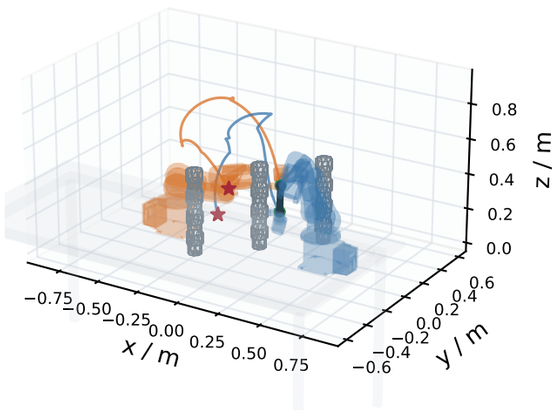


RRT / NR | saved midpoint | 197/393

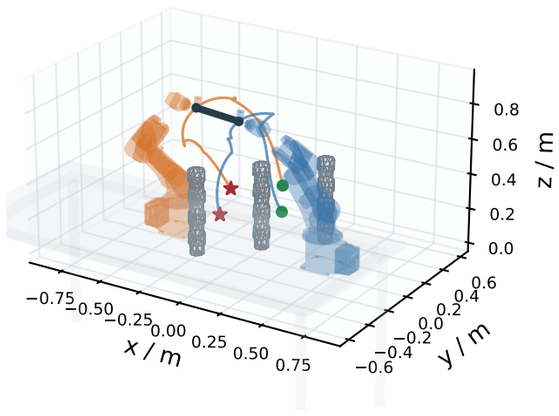


RRT / NR | goal | 393/393

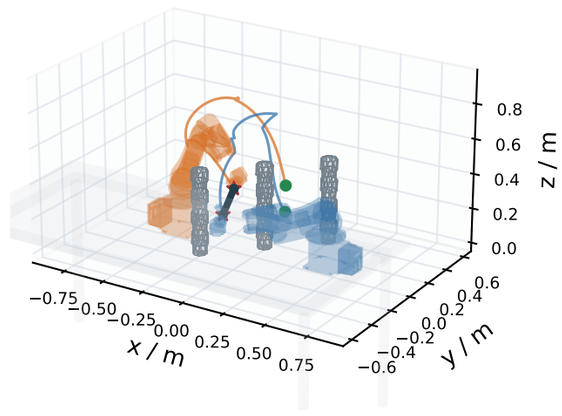


CBiRRT / NR | start | 1/689

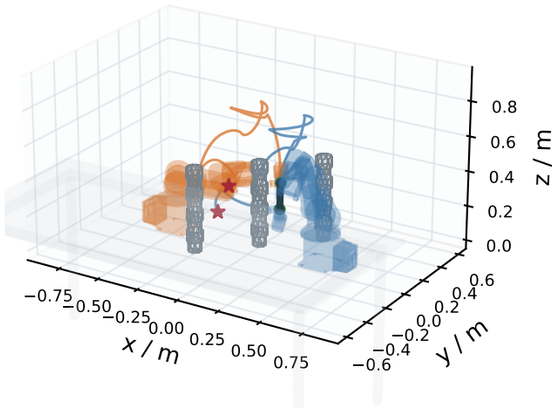

CBiRRT / NR | saved midpoint | 345/689

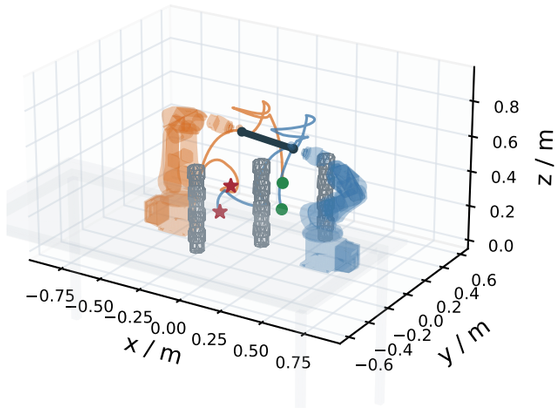

CBiRRT / NR | goal | 689/689

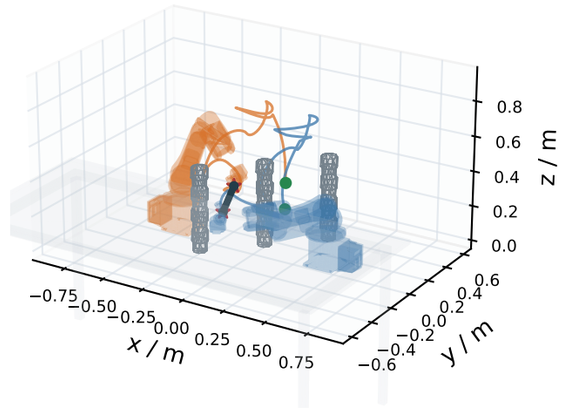

Orange/blue: arm TCP traces; green circle/start and red star/goal; dark bar: object.

Source CAD surfaces and aligned frames. Discrete source collision policy only; no native TCP or continuous CCD certificate.