TeraLyzer QuickStart

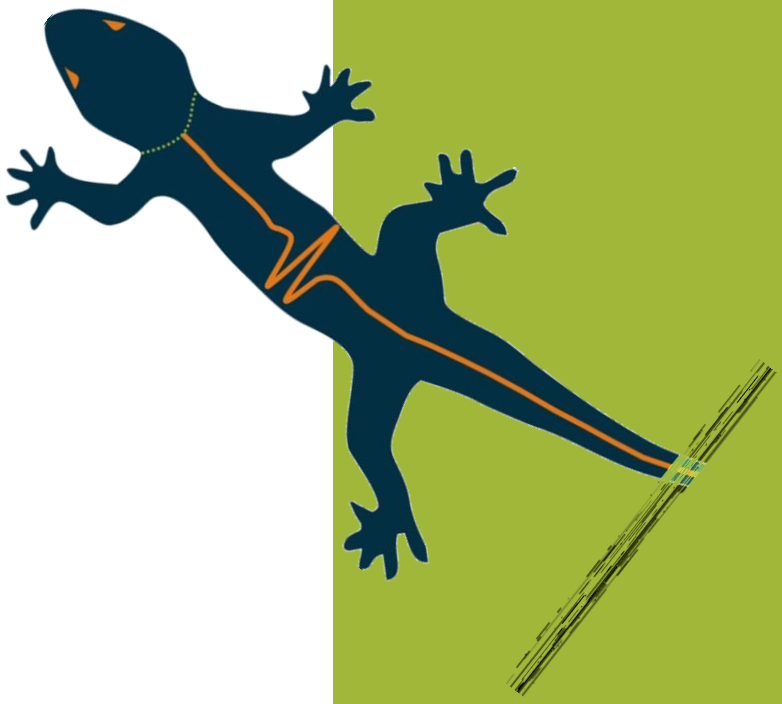

Lytera UG (haftungsbeschränkt)

Revision 1.0

1 Part A

-
- *Reference_Glas.txt* *Reference_Glas2.txt* *Glas_700µm.txt* *_700µm2.txt* *>>*
- *parset_Glas_700µm.mat*
- *Apply Analyse sample* *>>*
- *Start Calculation*
-

2 Part B

Glas_700µm.txt *_700µm2.txt*

Reference_Glas.txt *Reference_Glas2.txt*

Time	Data
0.000000000000000	0.001953140000000
0.080055382847556	0.002014180000000
0.160110765695113	0.002014180000000
0.240166148542669	0.001953140000000
0.320221531390226	0.002014180000000
0.400276914237782	0.002014180000000
0.480332297085339	0.002014180000000
0.560387679932895	0.001953140000000

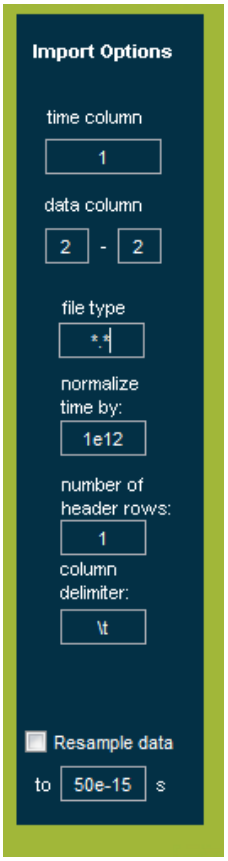

file type

don't want to resample the data, so we leave the resample box

Add

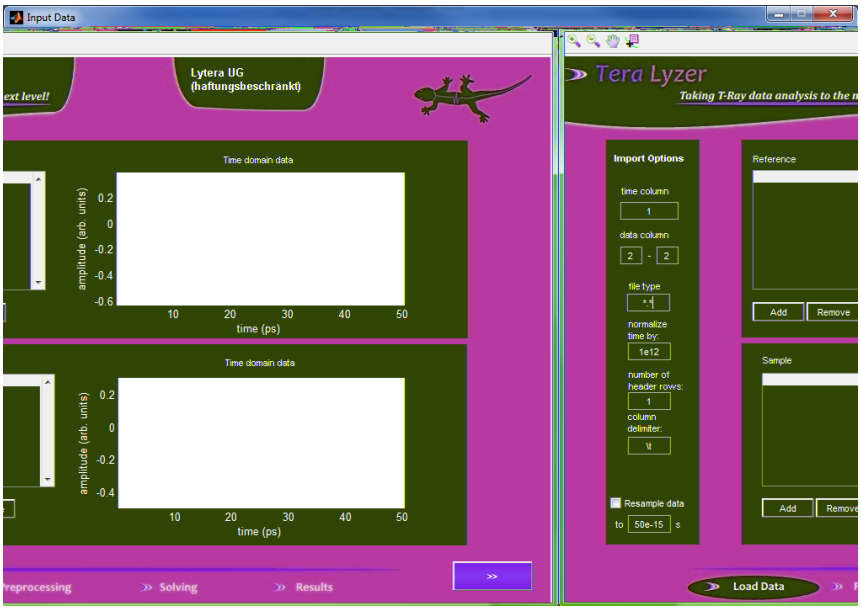

>>

parset_Glas_700µm.mat

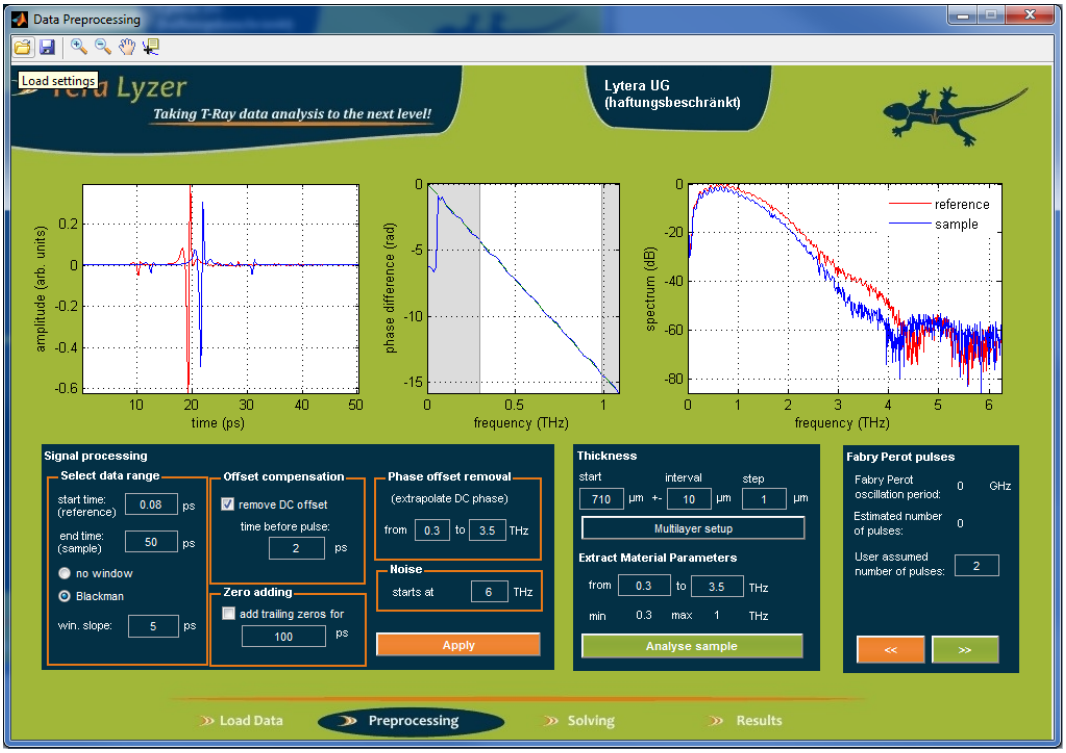

Apply

>>

Start calculation

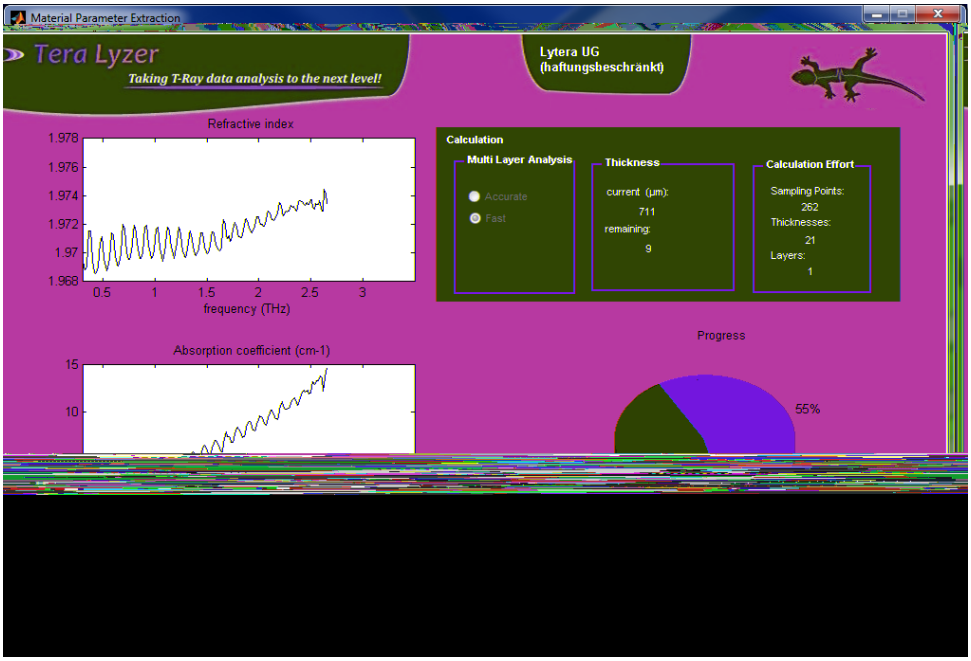

sample's

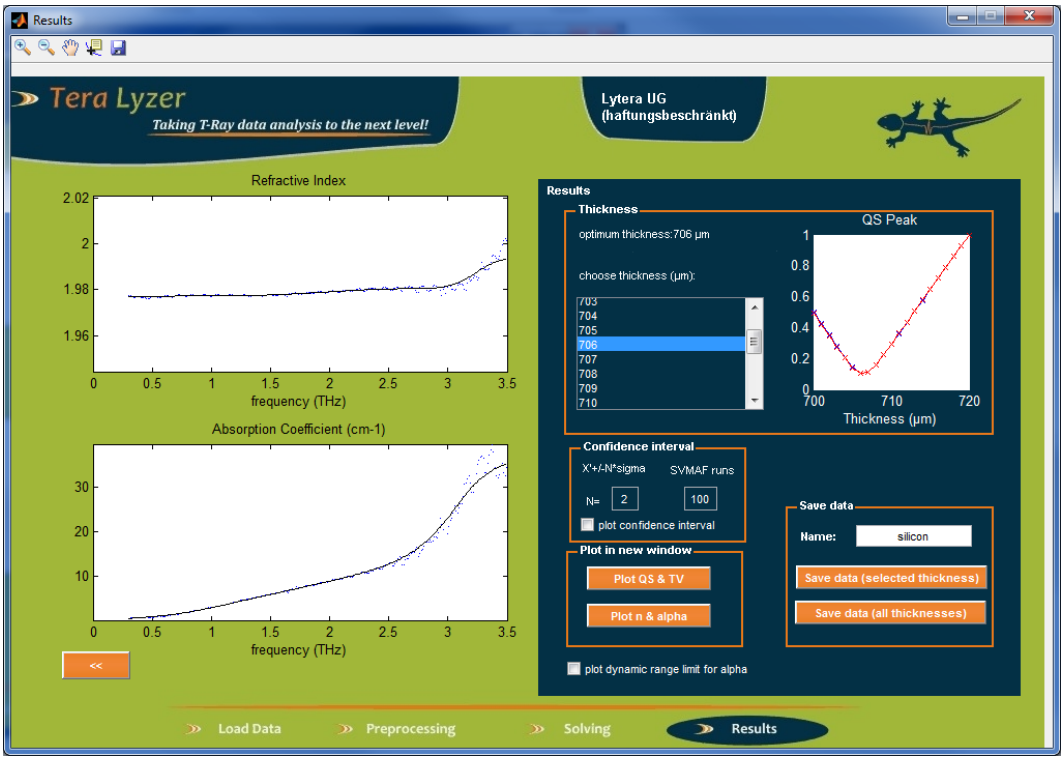
Results
Tera Lyzer
Taking T-Ray data analysis to the next level!
Lytera UG
(haftungsbeschränkt)
Refractive Index
frequency (THz)
Absorption Coefficient (cm-1)
frequency (THz)
<<
Results
Thickness
optimum thickness:706 µm
choose thickness (µm):
703
704
705
706
707
708
709
710
QS Peak
Thickness (µm)
Confidence interval
X'+/-N*sigma
SVMAF runs
N=
2
100
plot confidence interval
Plot in new window
Plot QS & TV
Plot n & alpha
Save data
Name:
silicon
Save data (selected thickness)
Save data (all thicknesses)
plot dynamic range limit for alpha
Load Data
Preprocessing
Solving
Results