


Mating Connector Pinout
View is mating side

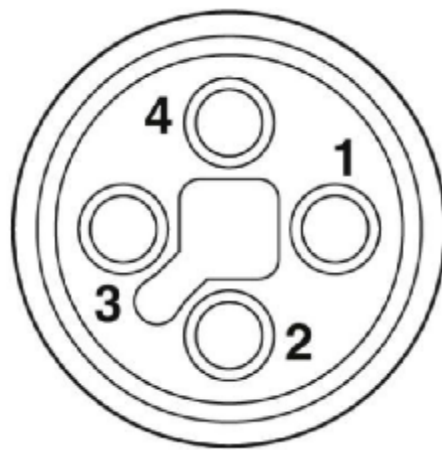

Regulated Power Breakout
Mating connector PN:
Pheonix Contact - SACC-M12FRT-4CON-PG11-M 1408989

Pin 1: 12V
Pin 2: 24V
Pin 3: GND
Pin 4: GND

Ghost Aux Connector
For use with Ghost approved devices only

USB 3.1, C

Mating Connector Options:
USBFireWire - RR-21C320-01-40
USBFireWire - RR-21C320-01-78

6x GMSL2
SMA Sensor Input

RJ45, LAN

RJ45, WAN/LAN

RJ45, WAN

Mating Connector Options:
USBFireWire - RR-225320-06-118
USBFireWire - RR-225330-00

Name: Vision60-v5.3D Electronics Breakout






Material:

Draw by: Micaiah Douglas

All Units in mm, degrees



Ghost Robotics
Proprietary and Confidential

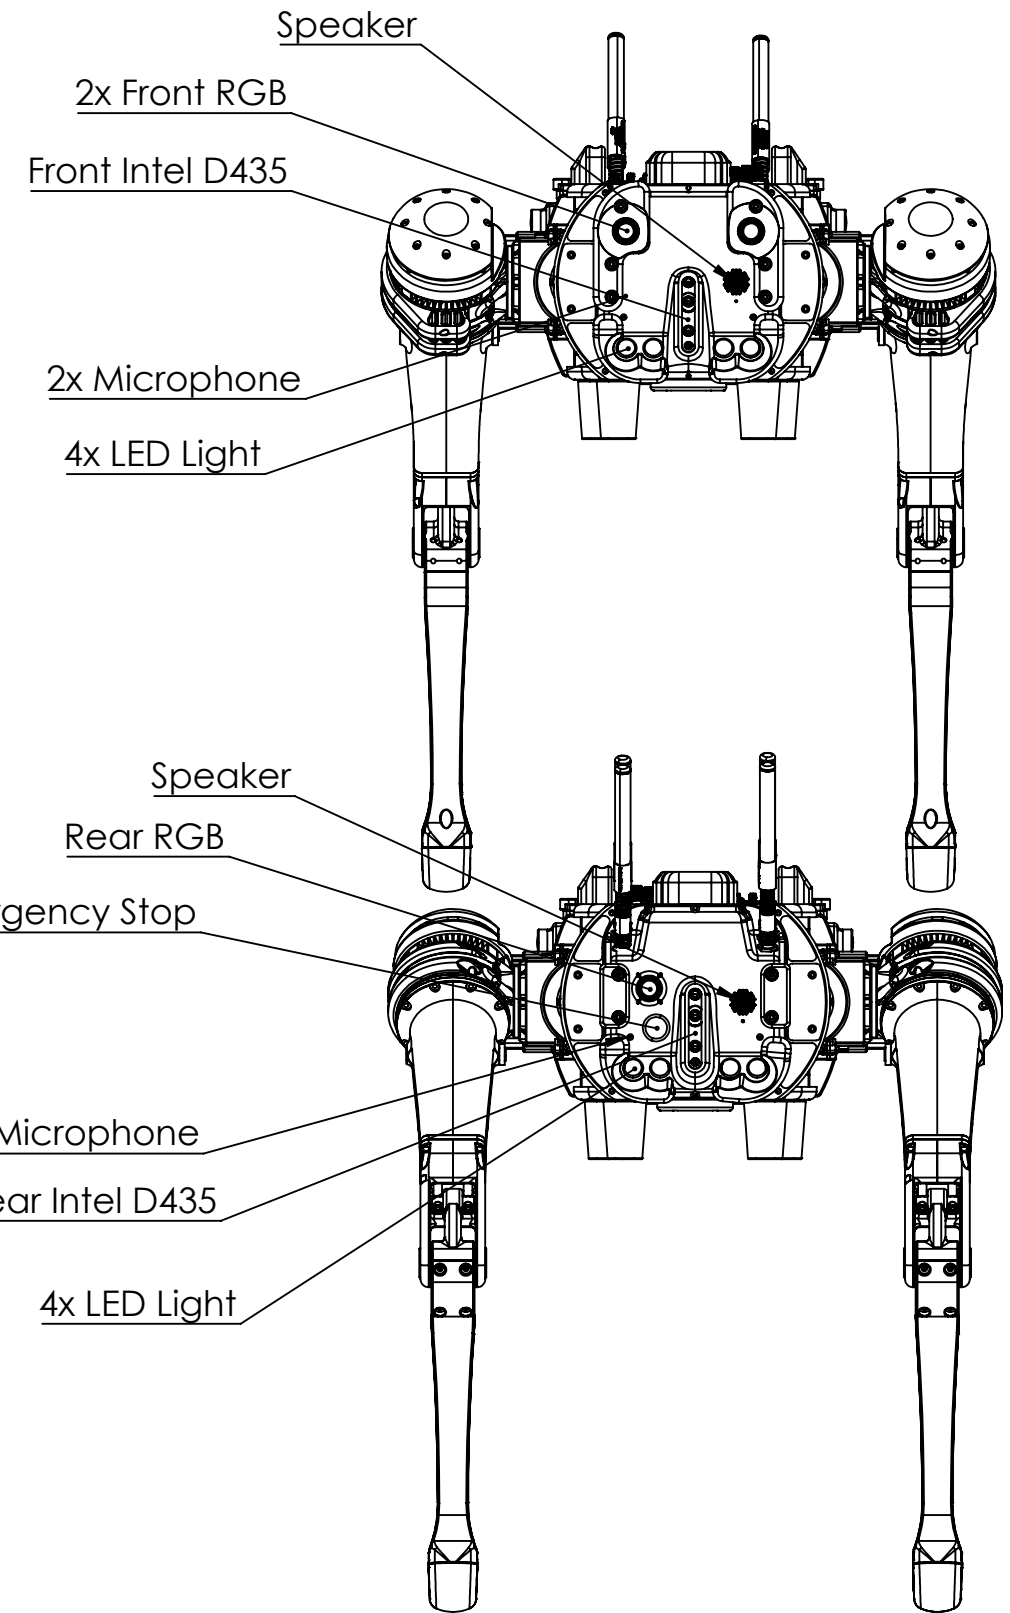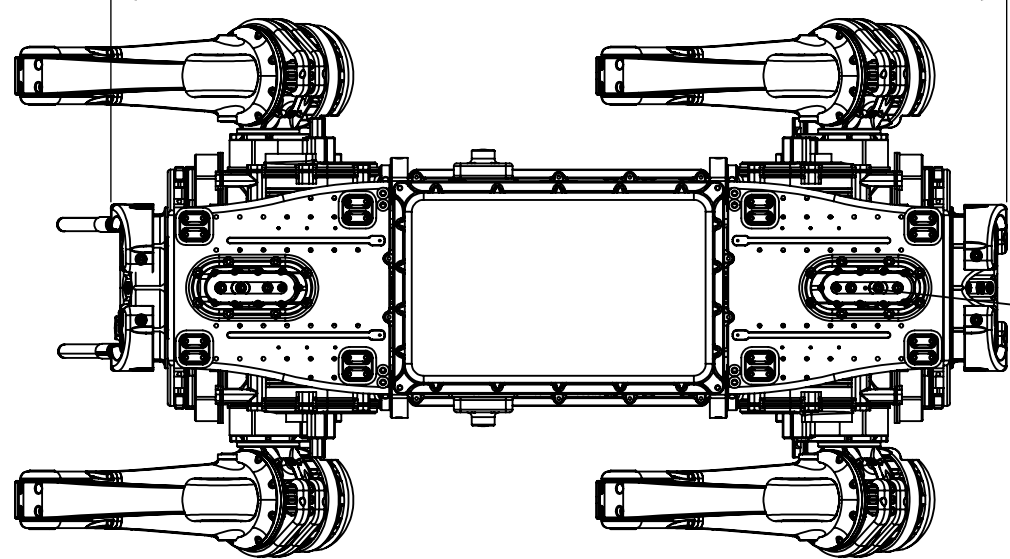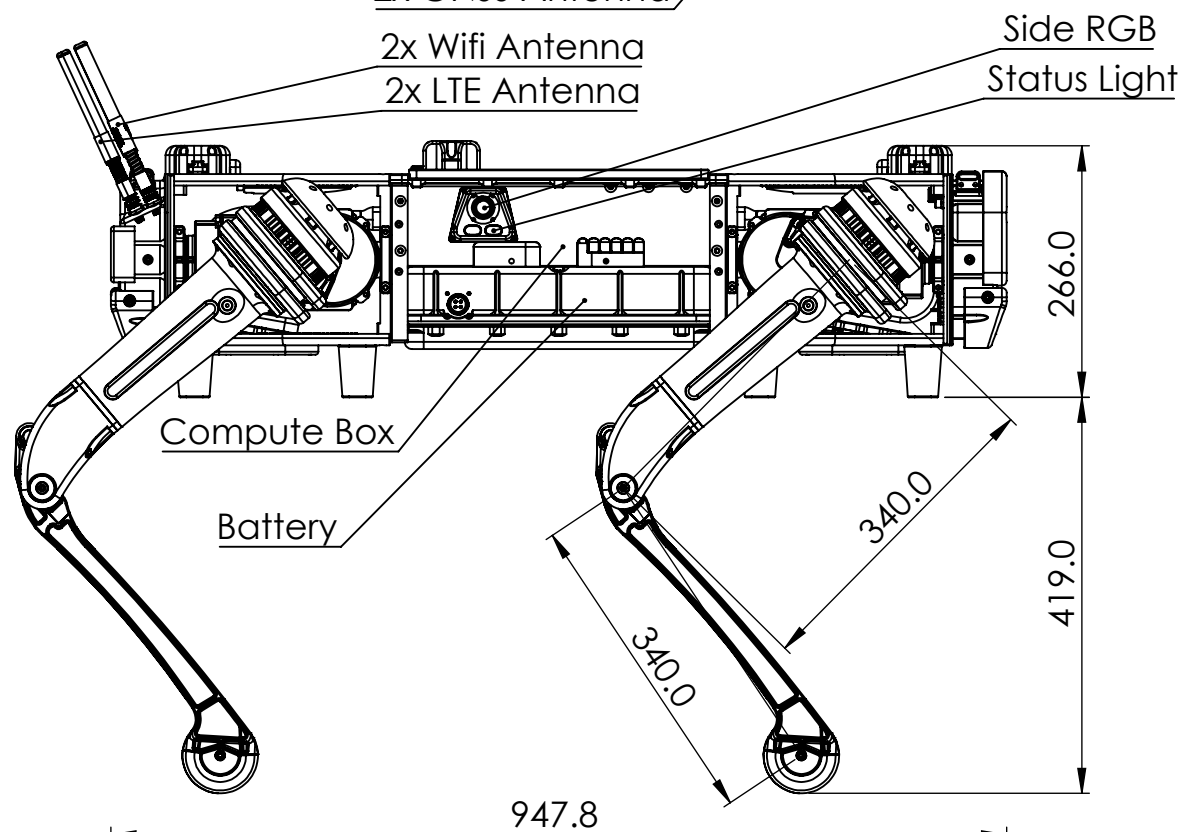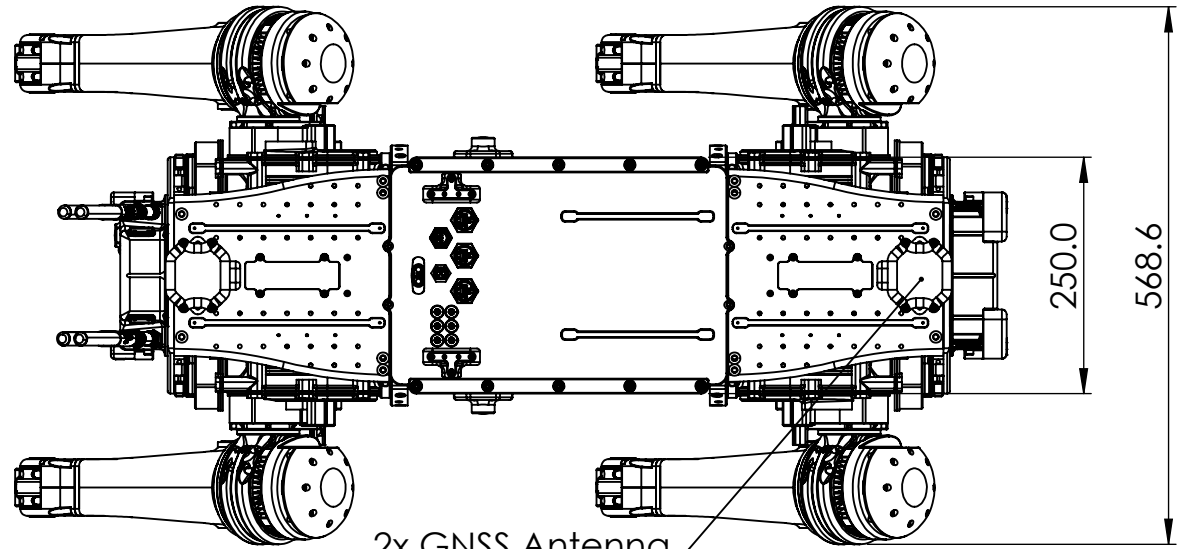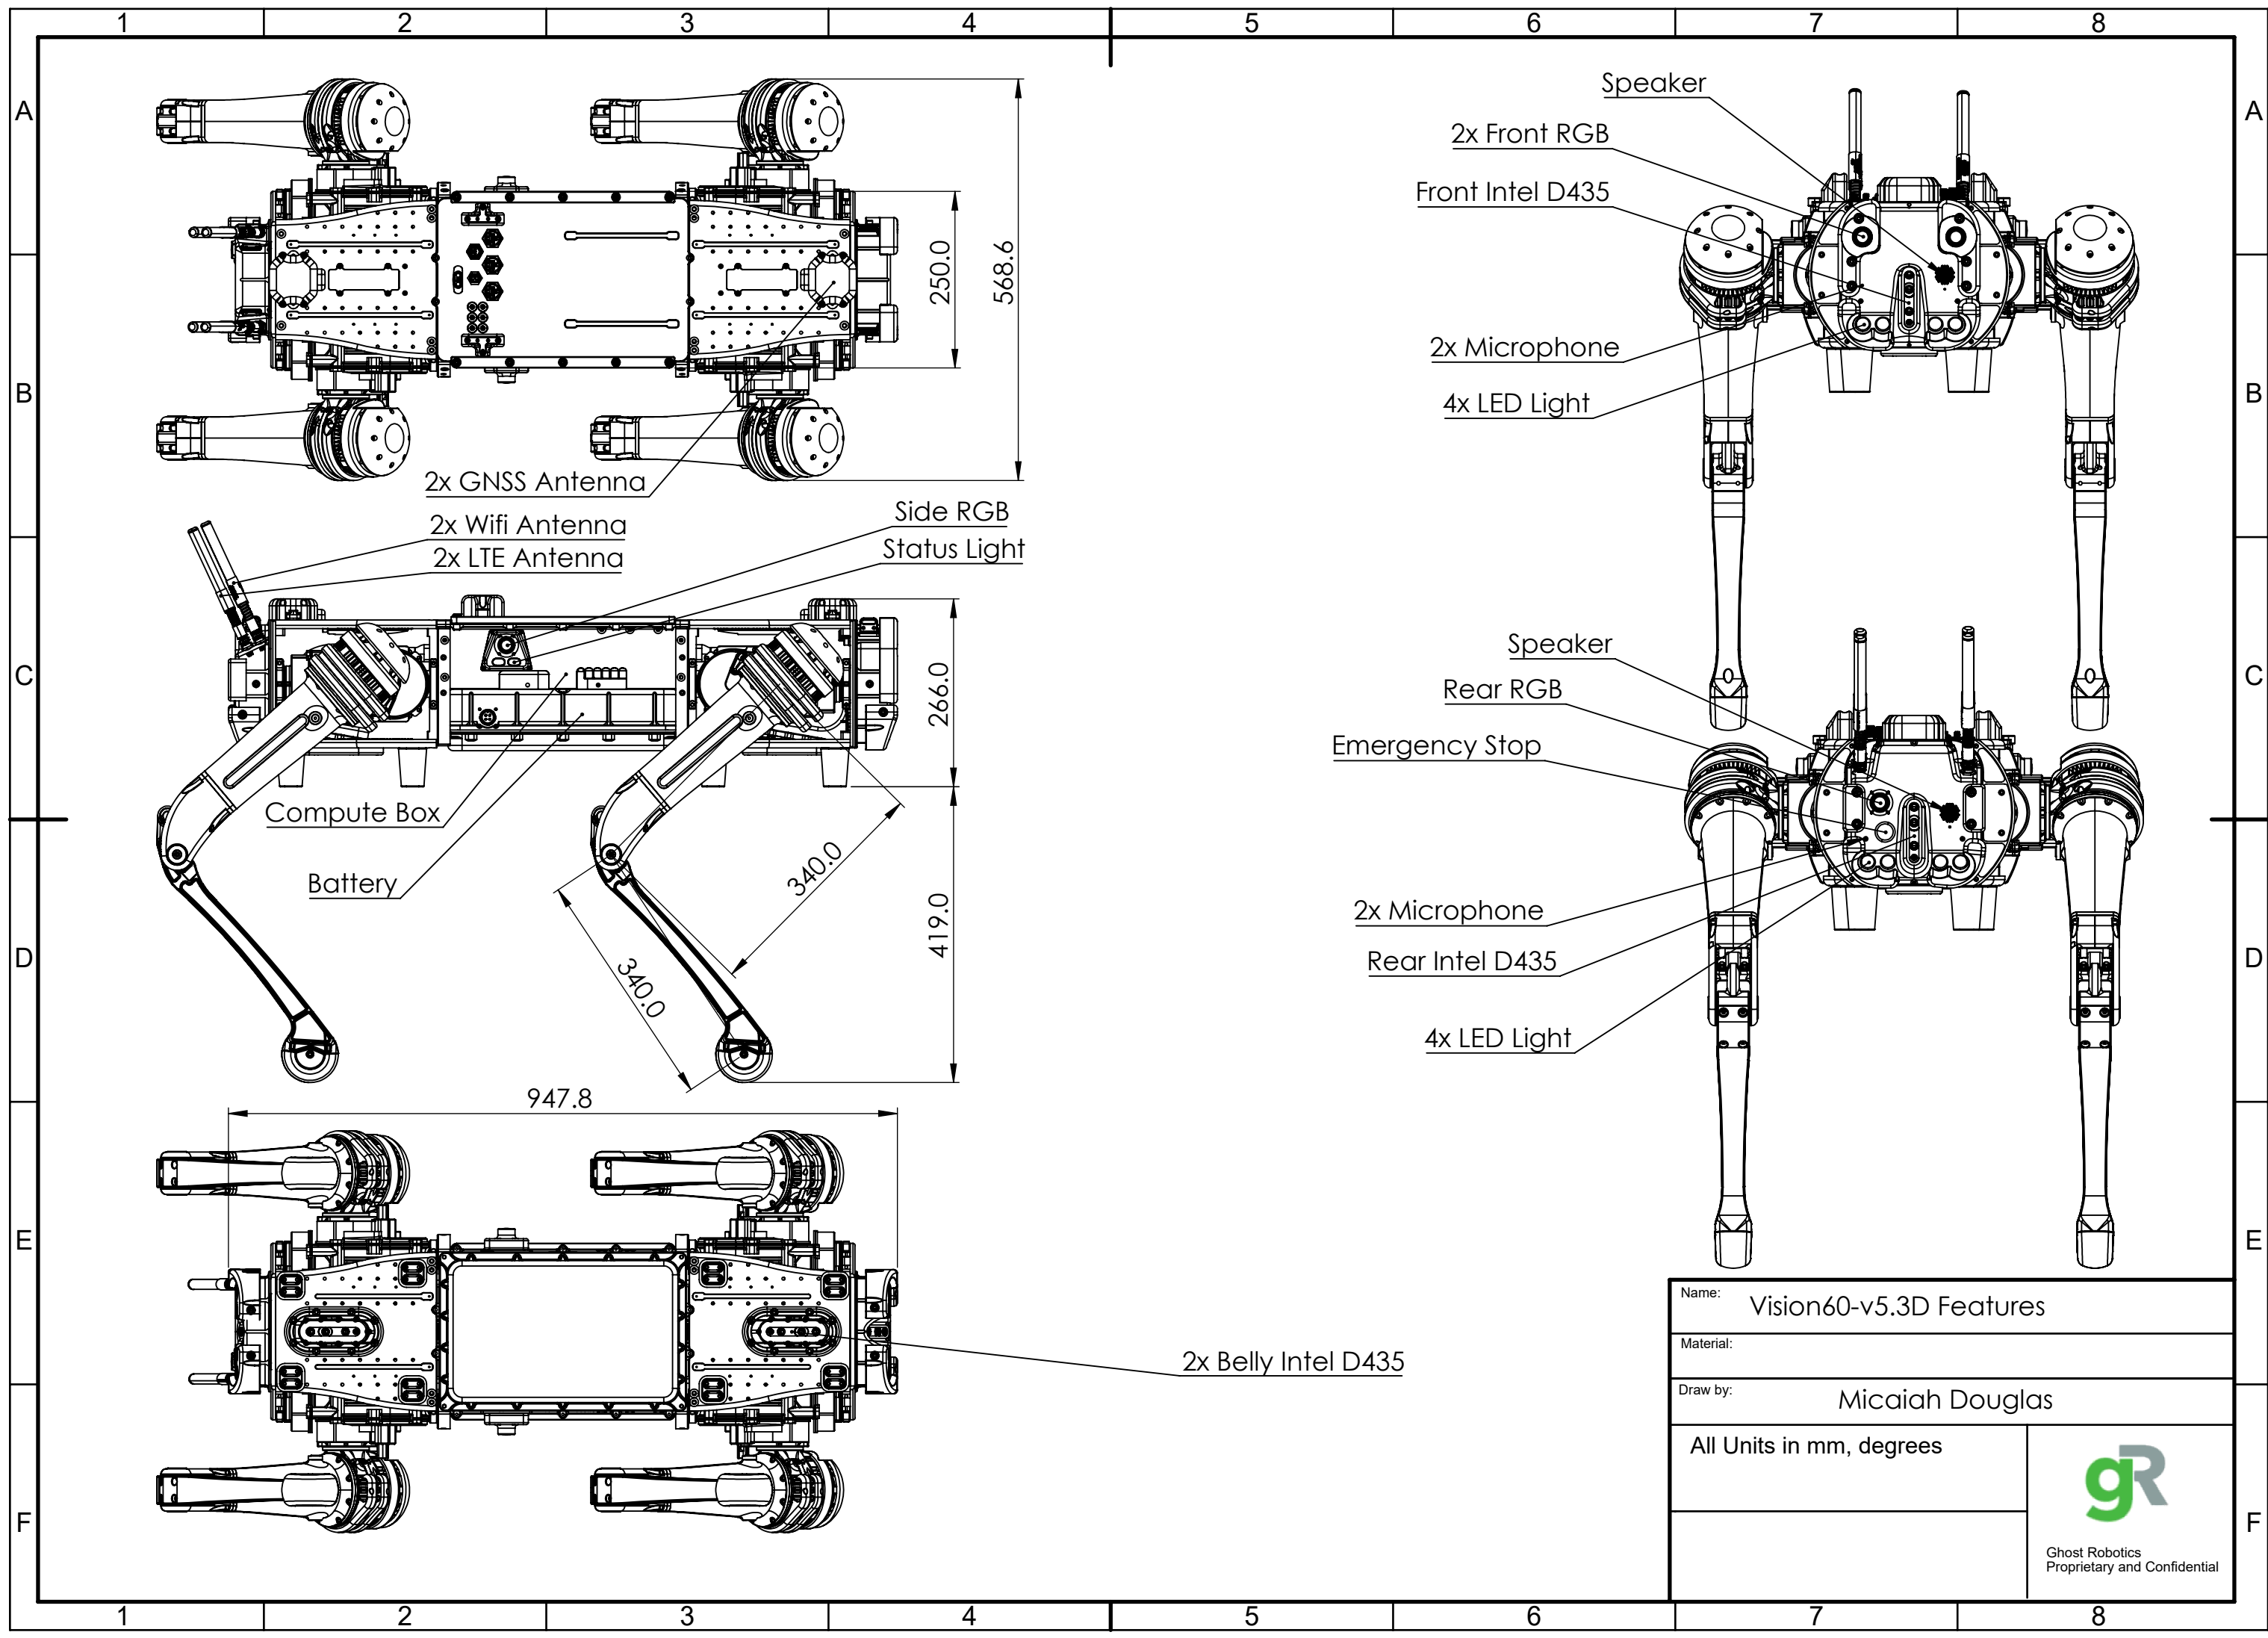

2x Belly Intel D435