


Development board version: FSC-DB200 V1.3

Module model: FCS-BT1026






REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

TRBI 200 Port

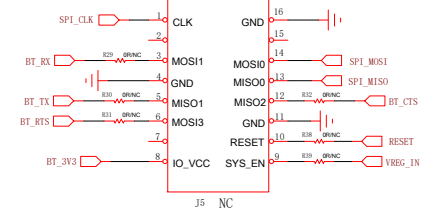


VBUS = USB 5V
VDD = BT_3V3 od VBAT


Short=SPI
Open=I2S

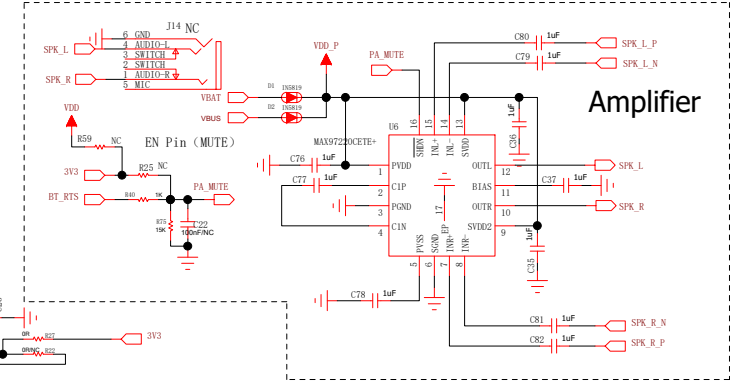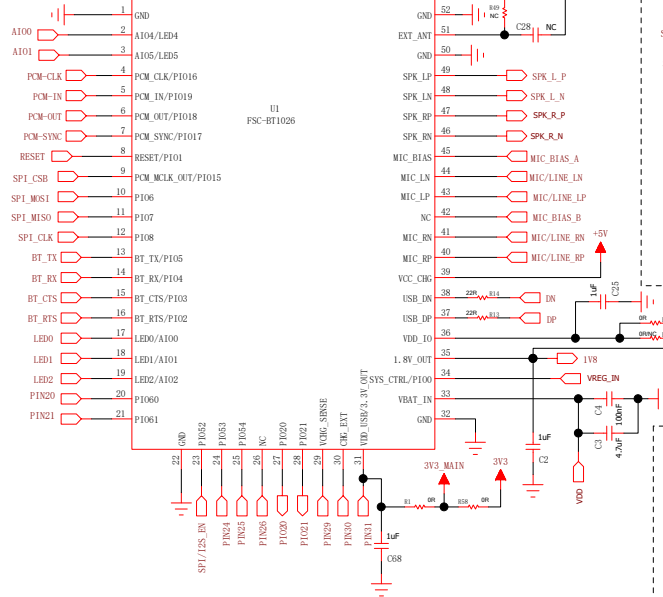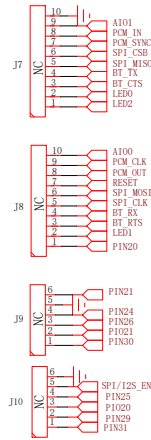


RESET




Used to switch between LINE in and MIC

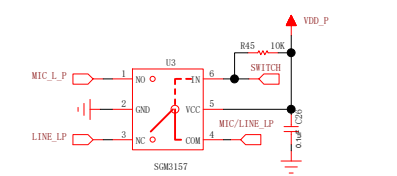


High Level in Default state = MIC
Low Level when plugged in = LINE IN

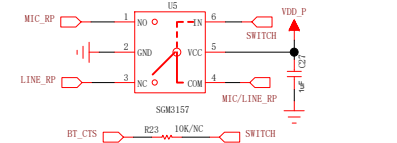


Line IN

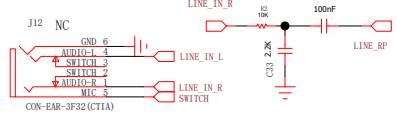


LED

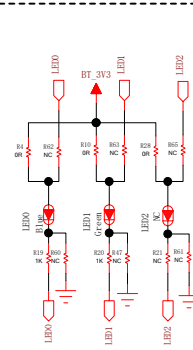

Button

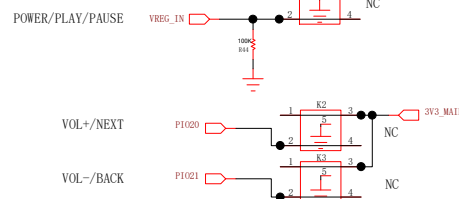


MIC

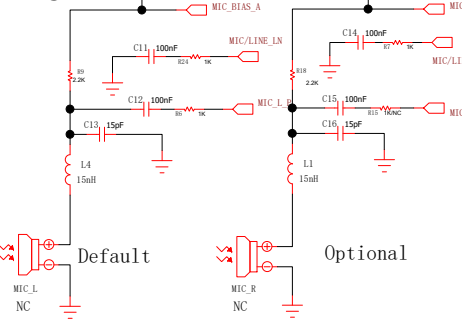


Default

Optional

Power

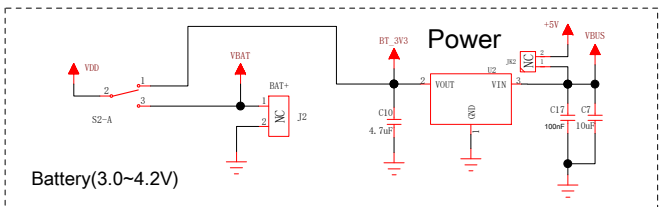

Battery(3.0~4.2V)

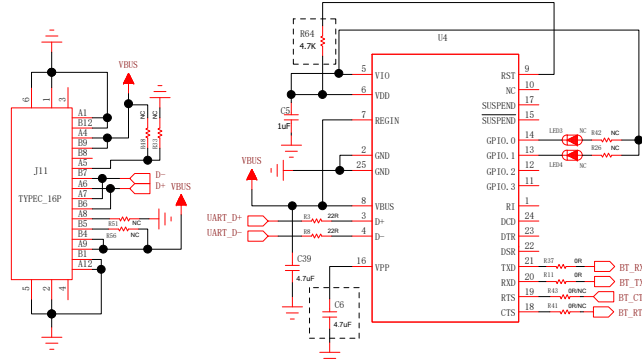

COMPANY:		Feasycom		
TITLE:		FSC-DB200 DK Board SCH		
DRAWN:	Fish	DATED:	20190723	
CHECKED:		DATED:		
QUALITY CONTROL:		DATED:		
RELEASED:		DATED:	20190723	
CODE:		SIZE:	C	DRAWING NO:
				REV:
				1.4
SCALE:				SHEET: 1 OF 1