

POWER: 36V IN -> FUSE -> TVS -> BUCK -> 5V-SRC JUMPER

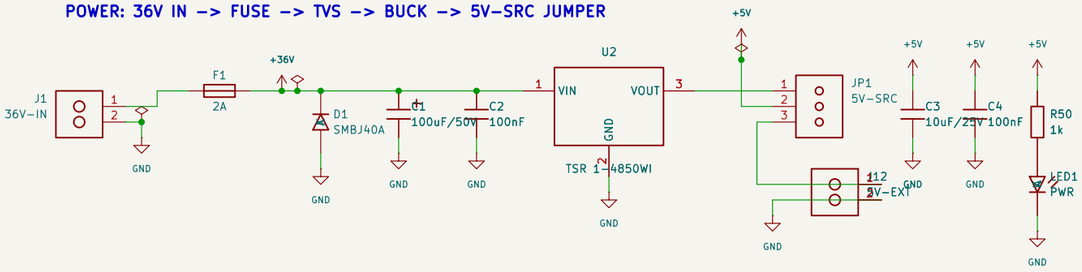


H1 H2 H3 H4 M3 M3 M3 M3

DRIVER TERMINALS: STEP DIR GND +5V(EN+) EN-

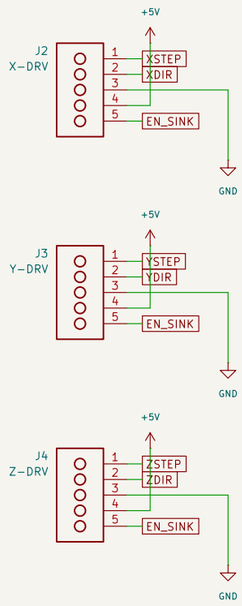

74AHCT541 @ 5V

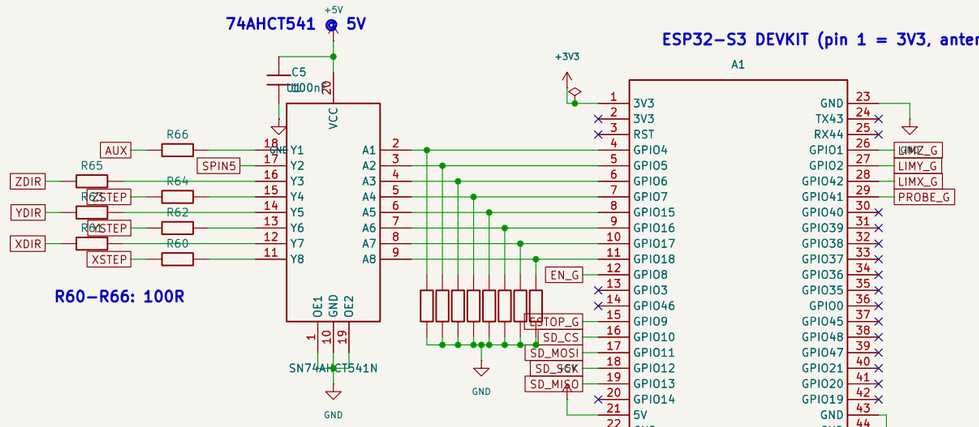


R60–R66: 100R


ESP32-S3 DEVKIT (pin 1 = 3V3, antenna end)


R10–R17: 100k boot pulldowns

INPUTS: 10k pullup / 1k series / 100n

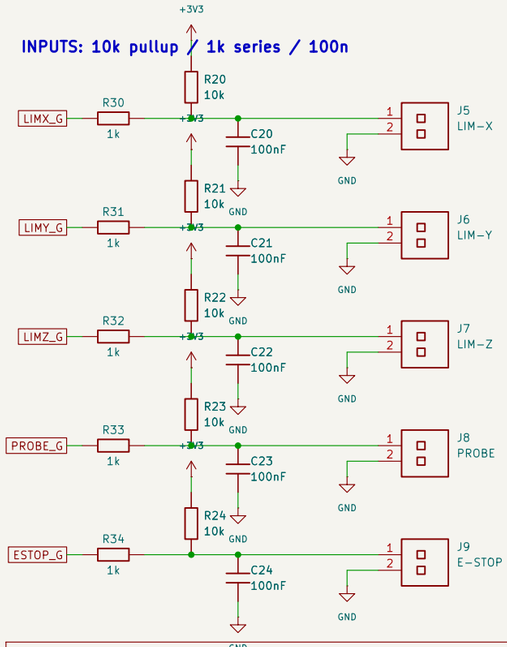


SD (3V3!) + AUX





EN SINK: GPIO8 high = disabled

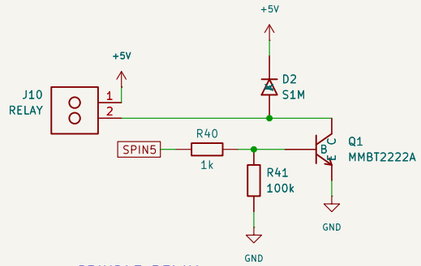

SPINDLE RELAY

SharkCNC

Sheet: /
File: fluidnc-bob-revD.kicad_sch

Title: fluidnc-bob rev D – ESP32-S3 FluidNC breakout, 36V single-supply

Size: A3	Date: 2026-07-28	**Rev: D**
KiCad E.D.A. 10.0.5		Id: 1/1