
VACTOR 2100 GLOBAL



VACTOR
WORK ASSURED

THE WORLD'S MOST POWERFUL CLEANING SYSTEM

For nearly 50 years, Vactor® Manufacturing has been the leader in building combination sewer cleaners with technological innovation and customized design. The latest series, the Vactor 2100 Global continues to set the bar in the industry. Vactor's proprietary system of integrated components is specifically designed for sewer cleaning applications. These components work together to deliver maximum cleaning power and efficiency.

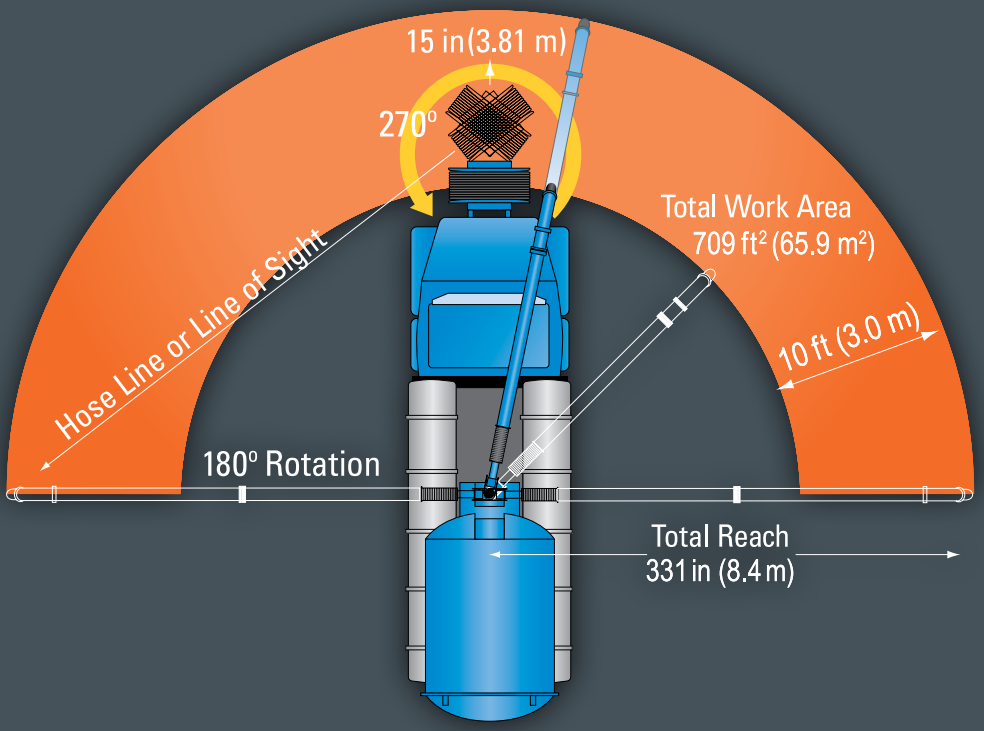



NEW TELESCOPING BOOM

The telescoping hydraulic boom (tube-within-tube, box beam-within-box beam) extends up to 10 ft (3.45 m) without affecting the vertical position of the pick-up tubes while enhancing reach and productivity. It rotates up to 180 degrees and provides 331 inches (8.4 m) of reach off the centerline of the unit, allowing the operator to place the vacuum hose in hard-to-reach areas.

MULTI-FLOW WATER PUMP CONTROLS

The standard multi-flow adjustable water pump control system allows the operator to match flow and pressure to the job requirements.

JETRODDER® WATER PUMP

Designed specifically to clean sewers, Vactor's **exclusive** JetRodder® water pump features a slow pump stroke to deliver maximum flow and pressure with minimal wear. The pump's cycles create an automatic "Jack Hammer" action that provides optimal cleaning capability to break through obstructions. Since the pump is hydraulic and features a single piston, no belts or other breakdown-prone components are required. Its side-mounted position allows for easy maintenance access. The JetRodder pump allows for flows up to 100 gpm (378 lpm) and pressures up to 3000 psi (206 bar).

FRONT-MOUNTED HOSE REEL

The hose reel, nozzle storage*, tool boxes* and operating controls are all located at the front of the unit for quicker access, increasing productivity and safety. The hose reel can telescope up to 15 inches (381 mm) forward and rotate up to 270 degrees to allow for optimal hose reel positioning without moving the truck.

*optional equipment

OPERATOR SAFETY & ERGONOMICS

E-stops (emergency stops) located at all operator control points on the unit quickly bring the unit to a safe condition, protecting both the operator and equipment. The water pump location, high ground clearance, lower water fill point, and twist-and-lock pipe restraints enhance the overall operator experience. Standard features such as adjustable hose reel pay-in/pay-out speed add to the productivity and efficiency.

STANDARD HIGH DUMP

Standard high dump [on single axle: 48 inch (1,219 mm); on tandem axle: 60 inch (1,524 mm)] improves overall ground clearance and allows unloading debris into roll-off containers without requiring a lift or ramp. This operation can be done on-site, resulting in fewer vehicle trips and saving time and fuel costs.

UNIQUE DEBRIS BODY

The 3/16 inch (4.7 mm) to 1/4 inch (6.4 mm) Ex-Ten steel abrasion and corrosion resistant debris body features an optimal air routing that facilitates airflow path, and allows for even loading and maximum material separation. Available volumetric capacities are 5, 10, 12 and 15 cubic yards (3.8, 7.6, 9.2 and 11.5 cu m). The flat rear door is equipped with a rod-and-receiver, block type sequential door locking system and a replaceable neoprene seal to prevent leakage. The body raises 50 degrees using a forward mounted, double acting hydraulic dump cylinder. The float balls are located at the rear of the body for industry-leading material separation and easy cleaning during dumping.




***Patent # U.S. 7,712,481 B1*
Some optional equipment shown

CENTRIFUGAL CYCLONES

To accommodate the increase in air-routing performance, Vactor designed bolt-on centrifugal cyclones that are sized for the air volume and aid in the process of material separation. They prevent the ingestion of 50 micron or larger particulate into the vacuum generator (fan or blower). Plus the rear location allows for easier clean-outs and does not obstruct boom swing or limit water capacity.

PIPE AND TOOL STORAGE

Designed for easy access, our optional fold down pipe racks with patented** twist-and-lock pipe restraints offer hassle-free pipe storage. Additional tool boxes and long handled tool racks are available for easy storage.

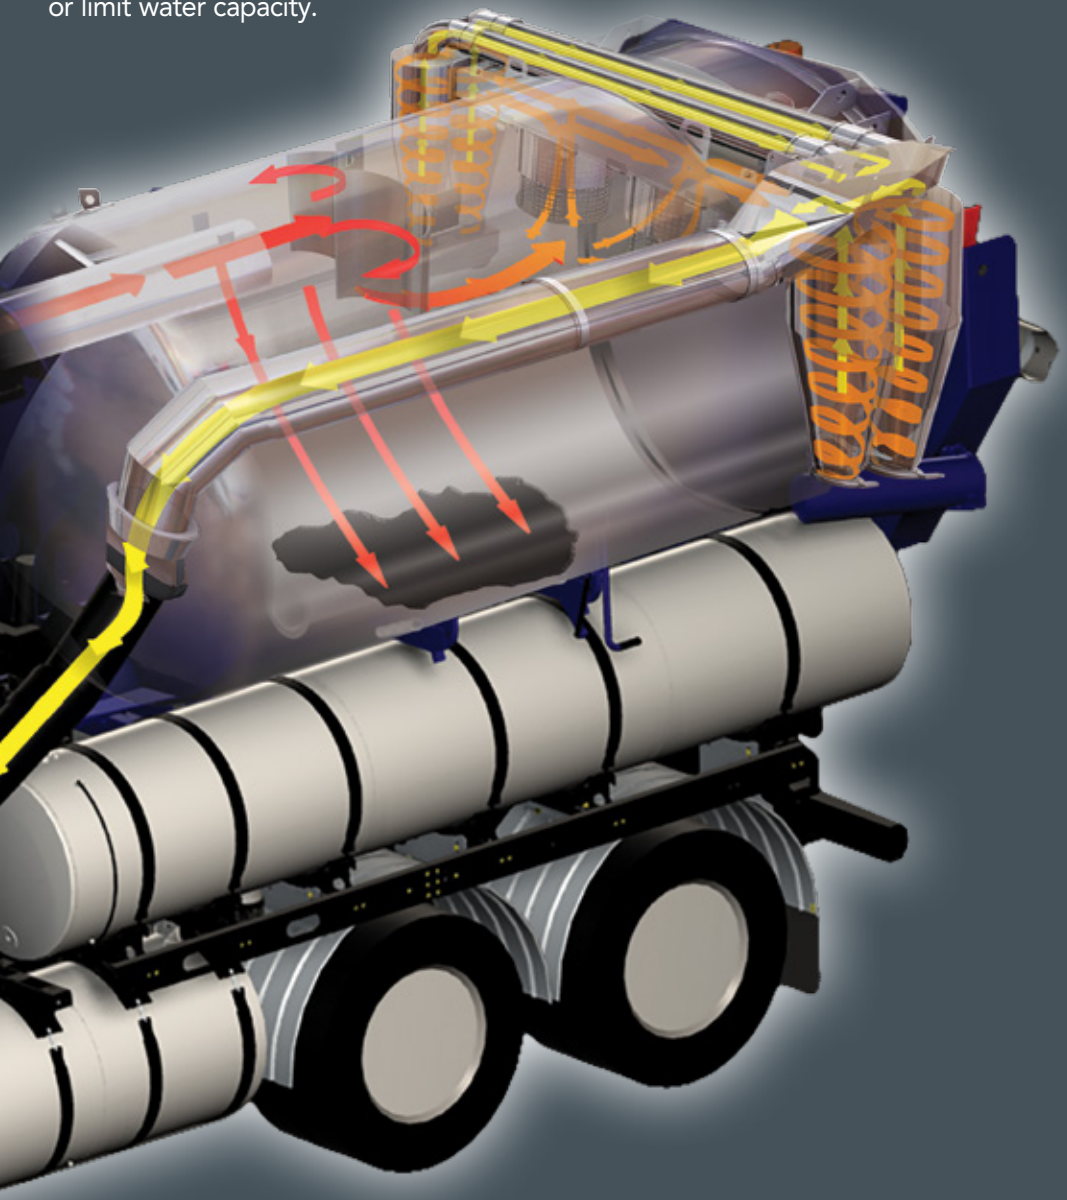

EXCLUSIVE ALUMINUM WATER TANKS


The aluminum water tanks resist corrosion and cracking and come standard with a 10 year warranty, and the modular design allows for fast replacements if necessary. The baffled cylindrical shape adds high strength and durability. The water tanks are separate from the debris body and do not raise while dumping. Their location adds stability and optimal weight distribution. Available water tank capacities are 1,000 gallons (3,785 l), 1,300 gallons (4,921 l) and 1,500 gallons (5, 678 l). The water fill is located at a low height, making filling the tanks quick and easy.



Sewer Cleaning Application



Exclusive Twist-And-Lock Pipe Storage

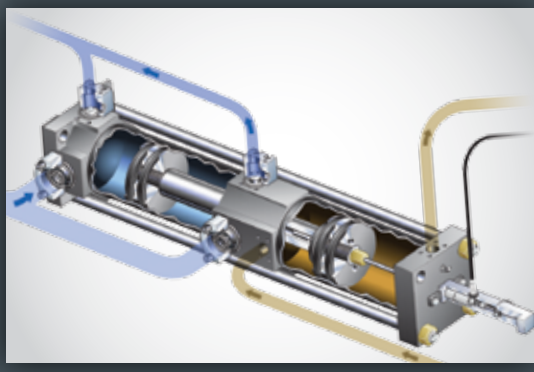

Exclusive JetRodder Water Pump



Convenient JetRodder Water Pump Location




Standard High Dump

VACUUM SYSTEMS

Depending on your specific needs, Vactor offers both centrifugal compressor (Fan) and positive displacement (PD) (pictured below) models.



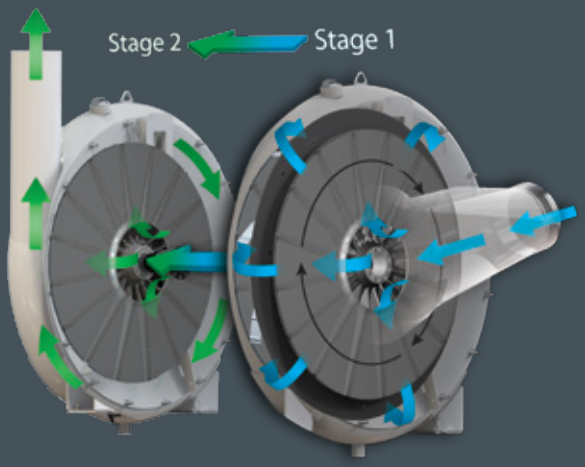

POSITIVE DISPLACEMENT BLOWER

For pulling material long distances, positive displacement (PD) technology is more appropriate. Vactor's PD blower is driven directly through a split shaft transfer case rated for 500 hp. Blower offerings providing inlet volumes in excess of 5,000 CFM and 18" Hg vacuum are available. Vactor's multi-stage blower filtration system features dual air ports which maximize material separation in the debris body. The stainless steel ball shutoffs prevent liquid debris carryover. Centrifugal cyclones remove escaped particles and condensation, and with the stainless steel screen strainers protect the blower from particles as small as 750 microns. Operators have convenient and quick access to the filter screens and quick release pins to remove the float ball screens.

SINGLE OR DUAL STAGE CENTRIFUGAL COMPRESSOR

For all around sanitary and storm sewer cleaning Vactor offers a patented fan system*. Whether equipped with a single or dual (for greater vacuum) fan system, the lightweight, perfectly balanced aluminum fan provides superior performance for the toughest jobs. The 38 in. (965 mm) diameter fan(s) with chrome-hardened surfaces is (are) contained inside a 1/4 inch (6.35 mm) spun steel housing providing an unmatched service life.

Auxiliary Engine: The fan is powered by a 4 cylinder (single stage model) or 6 cylinder (dual stage model) auxiliary engine, that is liquid cooled, diesel powered and turbocharged.



*Patent # U.S. D 616,468 S


OPTIONAL FEATURES



Debris Flush-Out System



Vactor OEM Nozzles

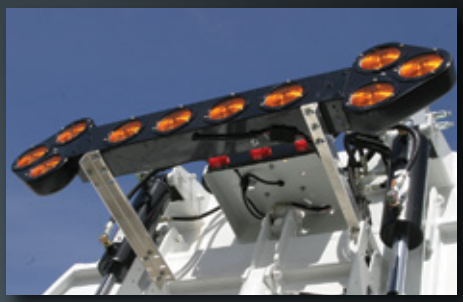

Safety Warning Enhancements

Over 100 precision-engineered productivity enhancements are available, including:

- Liquid debris pump-off system
- Debris flush-out system
- Water tank capacity up to 1,500 gal (5678 l)
- Accumulator
- Automatic hose level wind guide

VACTOR OEM NOZZLES

A complete line of penetrating, flushing, spinning and cutting nozzles deliver the right type of performance, all at an economical price.

SAFETY WARNING ENHANCEMENTS

Vactor offers a wide range of safety warning enhancements from amber strobe lights to directional arrow boards, backup/side view cameras and more.

POWERFUL SUPPORT

Vactor offers a facility dedicated to training your team on the usage of your Vactor equipment. Vactor dealers are factory-trained service experts to ensure the very best in maintenance and repair.

UNMATCHED QUALITY

Vactor introduced the 2100 Series over 25 years ago, which continues to set the standard in the industry today. Vactor products are painted prior to the assembly process, tested to ensure quality and proudly assembled using only the finest materials. Vactor is an ISO 9001:2008 certified company.

WARRANTY

In the terms and conditions of its warranty statement, the Vactor 2100 series is warranted against defects in material or workmanship for a period of 12 months from the date of delivery to the original purchase, 2 years on the JetRodder water pump, 5 years on the centrifugal compressor and 10 years on the water tanks. Optional extended warranty packages are available. Consult your Vactor dealer for complete warranty information.

VACTOR
WORK ASSURED

vactor.com

Specifications subject to change without notice. Some products shown with optional equipment. Vactor® and JetRodder® are registered trademarks of Vactor Manufacturing, Inc. Vactor is a subsidiary of Federal Signal. Federal Signal is listed in the NYSE by the symbol FSS.

Effective Date 4/15 P/N 00137 ©2015 Vactor Manufacturing, Inc

Vactor Manufacturing, Inc. • 1621 South Illinois Street • Streator, IL 61364 U.S.A.

(815) 672-3171 Phone • (815) 672-2779 Fax