


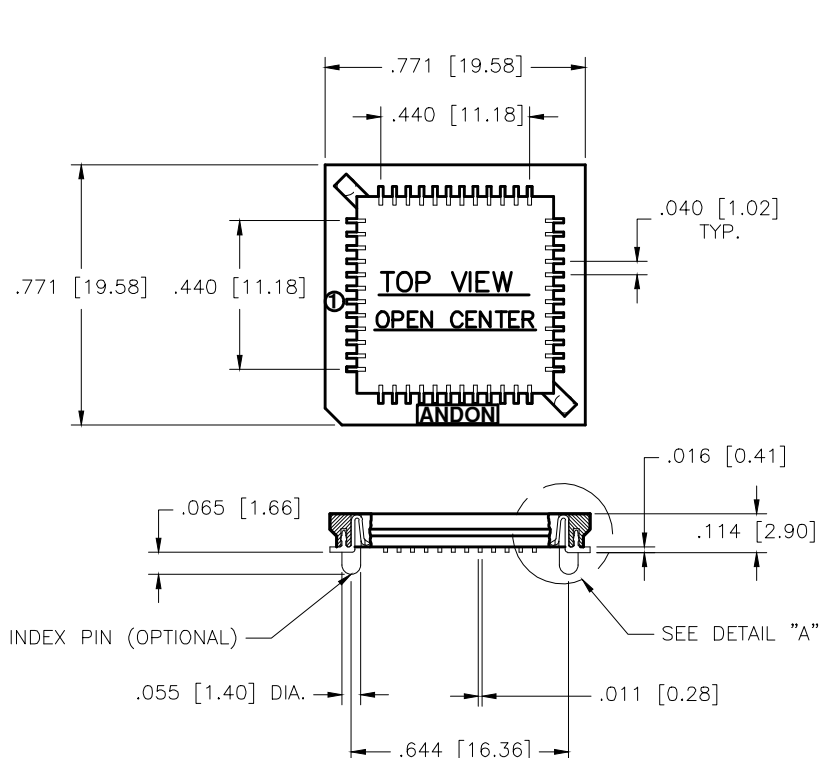

FOR INSTALLATION, PUSH DEVICE DOWN WITH THUMB UNTIL IT IS FLUSH WITH THE PCB

PART NO.	DESCRIPTION
680-48-SM-G10-R14-0	WITHOUT INDEX PINS
680-48-SM-G10-R14-1	WITH INDEX PINS

TECHNICAL SPECIFICATIONS




ELECTRICAL DATA

CONTACT RESISTANCE 30 MILLIOHMS
CURRENT RATING 1.0 AMP
INSULATION RESISTANCE ... 1000 MEGAOHMS
DIELECTRIC VOLTAGE 500 VAC

MATERIAL DATA

INSULATOR HIGH TEMP UL 94V-0
CONTACT BERYLLIUM COPPER
PLATING G10 GOLD OVER NICKEL

RoHS COMPLIANT

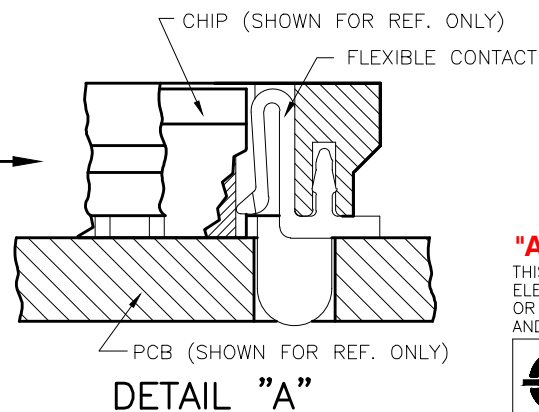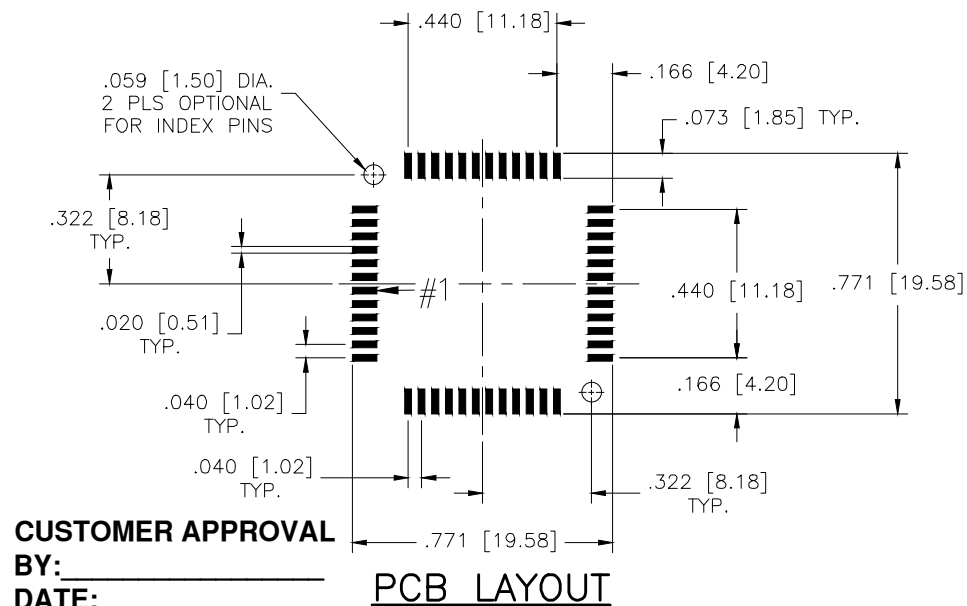

"ANDON PROPRIETARY INFORMATION"

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO ANDON ELECTRONICS CORPORATION. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING IS EXPRESSLY PROHIBITED AS ANDON ELECTRONICS MAY OTHERWISE AGREE IN WRITING.



TITLE: 2.85MM, .040 PITCH, 48 PIN LCC SOCKET		
TOLERANCE EXCEPT AS NOTED	DRAWN BY: S. KIRCORIAN	SCALE: NONE
ANGLE ±1/2°	CHK'D BY: FE/SEK	DATE: 3-27-03
FRACTION ±.010	APP'D BY: F. ESTRADA	FILE:
.XX ±.010	UNITS: INCHES [MILLIMETERS]	
.XXX ±.005		
DWG. NO. 680-48-SM-G10-R14-1	REV. 0	

REV.	DESCRIPTION	DATE	REV. BY	APP. BY