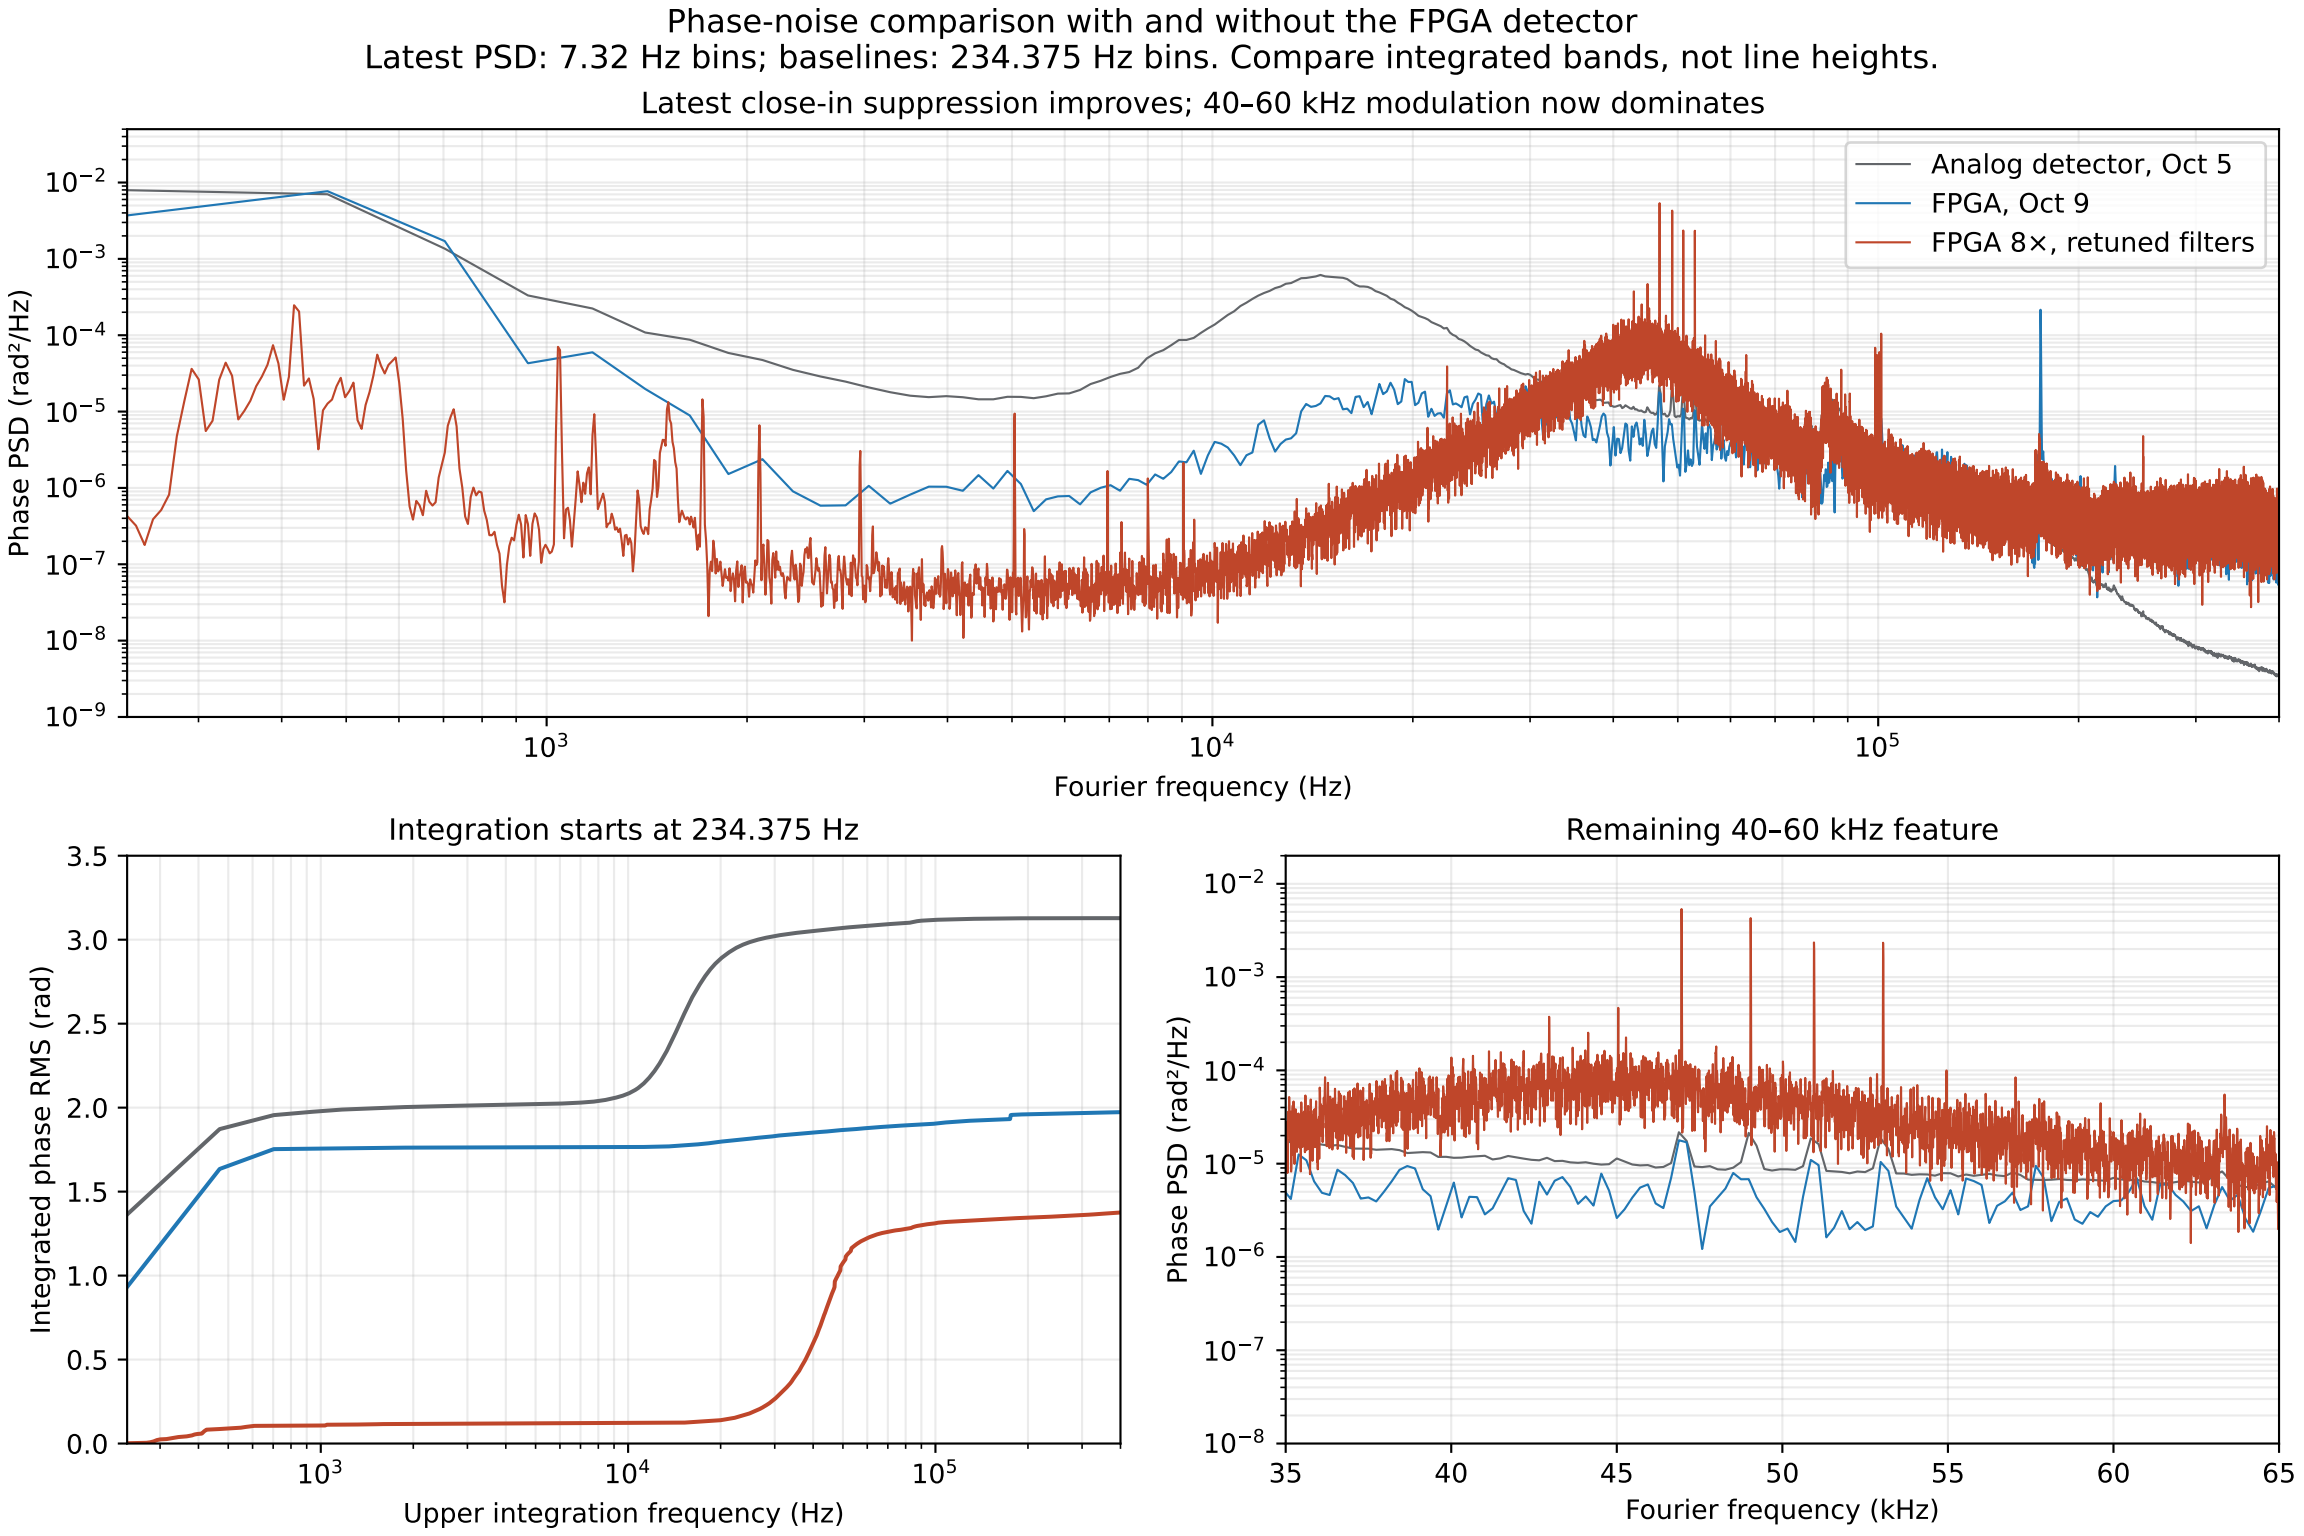

Phase-noise comparison with and without the FPGA detector
Latest PSD: 7.32 Hz bins; baselines: 234.375 Hz bins. Compare integrated bands, not line heights.
Latest close-in suppression improves; 40–60 kHz modulation now dominates
Analog detector, Oct 5
FPGA, Oct 9
FPGA 8×, retuned filters
Phase PSD (rad²/Hz)
Fourier frequency (Hz)
Integration starts at 234.375 Hz
Integrated phase RMS (rad)
Upper integration frequency (Hz)
Remaining 40–60 kHz feature
Phase PSD (rad²/Hz)
Fourier frequency (kHz)