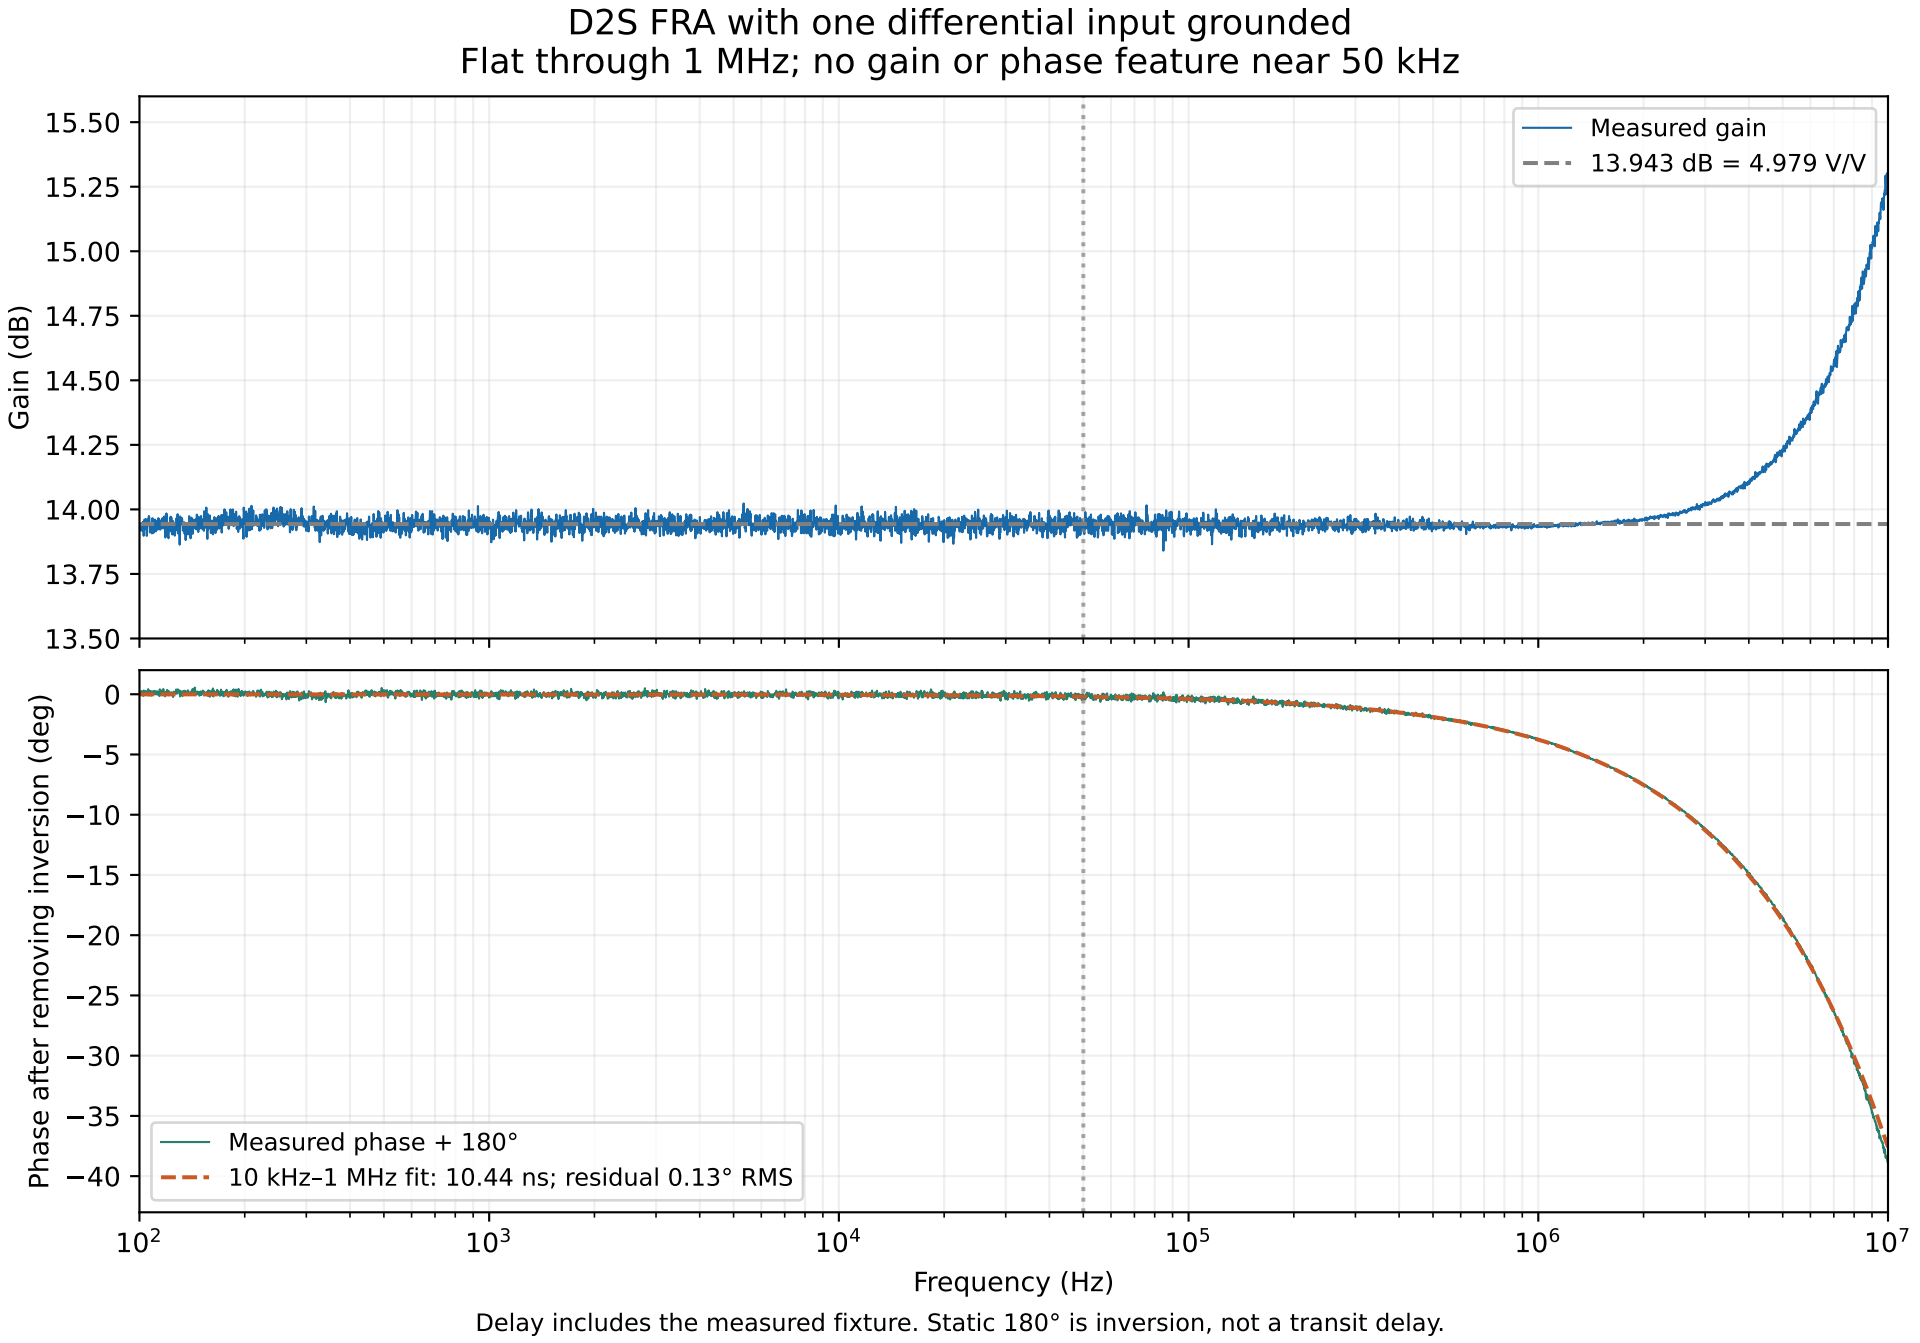

D2S FRA with one differential input grounded
Flat through 1 MHz; no gain or phase feature near 50 kHz
Gain (dB)
15.50
15.25
15.00
14.75
14.50
14.25
14.00
13.75
13.50
Measured gain
13.943 dB = 4.979 V/V
Phase after removing inversion (deg)
0
−5
−10
−15
−20
−25
−30
−35
−40
Measured phase + 180°
10 kHz–1 MHz fit: 10.44 ns; residual 0.13° RMS
10^2
10^3
10^4
10^5
10^6
10^7
Frequency (Hz)
Delay includes the measured fixture. Static 180° is inversion, not a transit delay.