

Germanium Glass Diode

Features

- Optimized for Radio Frequency Response
- Gold Bonded
- Lower Leakage Current



DO-7


Mechanical Data

Case:	DO-7, molded glass
Terminals:	Plated axial lead, solderable per MIL-STD-202E, Method 208
Polarity:	Color band denotes cathode end
Weight:	0.2 gram

Maximum Ratings and Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless noted otherwise)

Symbol	Description	1N100	Unit	Conditions
PIV	Maximum Peak Reverse Voltage	100	V	
IFSM	Peak Forward Surge Current Non Repetitive	400	mA	t=1 second
IFSR	Peak Forward Surge Current Repetitive	250	mA	
IF(AV)	Maximum Average Forward Rectified Current	70	mA	
VF	Maximum Instantaneous Forward Voltage	1.0	V	IF=40mA
IR	Maximum Reverse Leakage	5	μA	VR=5V
		50		VR=50V
TJ	Operating Temperature range	-78 to +90	$^{\circ}\text{C}$	
TSTG	Storage Temperature Range	-78 to +100	$^{\circ}\text{C}$	

Dimensions in $\frac{\text{inch}}{\text{mm}}$

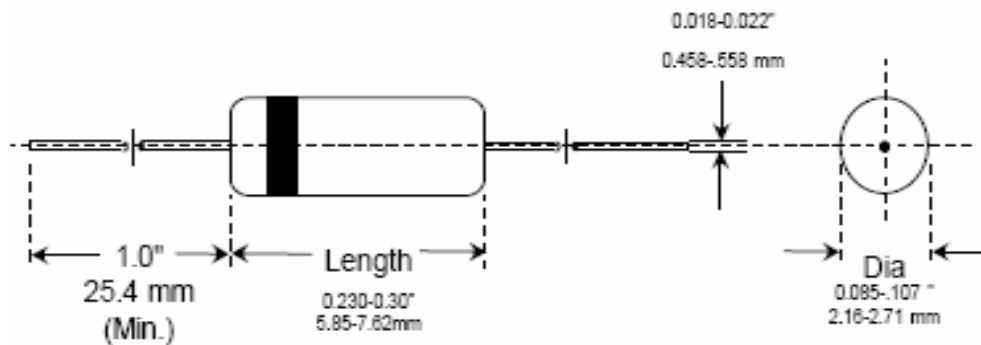

DO-7 Glass Package

How to contact us:

US HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800) TAITRON (800) 824-8766 (661) 257-6060

Fax: (800) TAITFAX (800) 824-8329 (661) 257-6415

Email: taitron@taitroncomponents.com

Http://www.taitroncomponents.com

TAITRON COMPONENTS MEXICO, S.A .DE C.V.

BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO C.P.
42970 MEXICO

Tel: +52-55-5560-1519

Fax: +52-55-5560-2190

TAITRON COMPONETS INCORPORATED E REPRESENTAÇÕES DO BRASIL LTDA

RUA DOMINGOS DE MORAIS, 2777, 2.ANDAR, SALA 24 SAÚDE - SÃO PAULO-SP 04035-001
BRAZIL

Tel: +55-11-5574-7949

Fax: +55-11-5572-0052

TAITRON COMPONETS INCORPORATED, SHANGHAI REPRESENTATIVE OFFICE

METROBANK PLAZA, 1160 WEST YAN' AN ROAD, SUITE 1503, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-5424-9931