

Rendered with the real Blue swatch, laid as 1.8m wide sheet.

Akira Sport Series


PVC sports flooring reinforced with a fibre grid fabric.

This product is formed by adding a kind of special fibre grid fabric to PVC wear layer and is the advantage of more convenient movement. It is ametabolic in the force of either being pulled or rolled, and of uniform distribution of supporting force, adding fiberglass grid fabric to the under foam layer is to reduce expansion when heated and shrinkage when cooled, to fulfill the function of more steady capability, to extend the service life, so that the athletes can play better level.

Colour selection



Blue | Red | Dark Red | Green | Wood

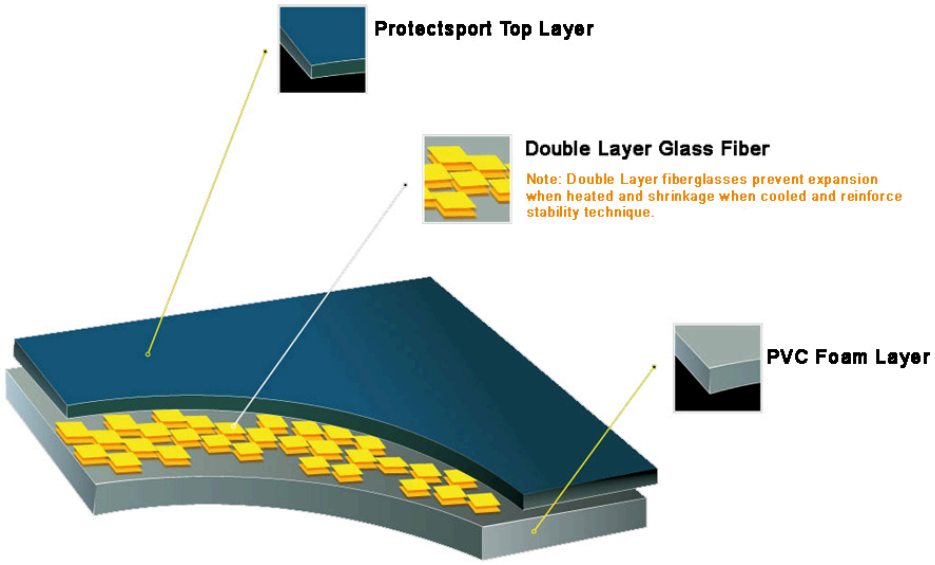



Akira Sport Series in use

Printed and on-screen colours are a guide. Please confirm your choice against an actual sample.

Specification and care

Description

Property	Standard	Unit	Value
Standard Length (m)	EN 426	m	30
Width	EN 426	m	1.8
Thickness	EN 428	mm	4.5 / 6.5 / 8.0
Hardness	70~90		73
Rebound	≥ 6	%	8
Tensile Strength	≥2	Mpa	2.2
Elongation Ratio	≥120	%	170
Abrasion Resistance	0.45~0.65	g	0.55

Environmental Test

Property	Standard	Unit	Value
Chloroethylene monomer	≤ 5	mg / kg	-
Soluble Lead	≤ 20	mg / m^2	3.3
Water-Soluble Cadmium	≤ 20		0.096
Volatile Matter	≤ 75	g / m^2	12
Flammability	GB 8624		B1 - C1
Critical Radiant Flux	≥ 0.45	W / cm^2	0.76

Installation

When you lay the PVC floors on cement ground, the foundation must be maintained for more than 15 days and dry out. The cement ground cannot be roughness, and level degree is 4m ruler+less than 3mm. If the foundation is not level, you should polish it with special floor grinder and make it level. then you could go on for next step.

Durafloor Industries Sdn. Bhd.
(122259-H)
Tel and WhatsApp 012-3222160
durafloor@hotmail.com
www.durafloor.com.my

HQ Wisma Durafloor
65, Jalan PBS 14/2, Taman
Perindustrian Bukit Serdang,
43300 Seri Kembangan, Selangor

Factory
17, Persiaran Zurah 1, Pusat
Perindustrian Zurah,
Mukim Rasa, 44200 Daerah Hulu
Selangor, Selangor