

Rendered with the real AS-0002 Techno Ice swatch, at true size.

Antistatic ESD Homogeneous Flooring


Grounds static charge to protect sensitive electronics.

Durafloor ESD Antistatic flooring is crucial for protecting sensitive electronics and equipment from damage caused by static electricity. This advanced ESD (Electrostatic Discharge) flooring solution works by effectively grounding and dispersing static charges, preventing the buildup of voltage that can harm sensitive devices. Durafloor ESD Antistatic tiles are specifically designed to conduct and dissipate static electricity, providing a reliable pathway to ground for optimal protection in critical environments.


With its advanced ESD properties, Durafloor ESD Antistatic flooring offers several key benefits. Firstly, it provides a safe and reliable environment for sensitive electronics, reducing the risk of damage caused by static electricity. This is particularly important in industries such as semiconductor manufacturing, laboratories, and research facilities, where even small amounts of static can cause significant harm.

Product Size: 600 x 600 x 2.0mm / 28 tiles/ box / 10.08 m^2/ box / 108.50 ft^2/ box

Design selection

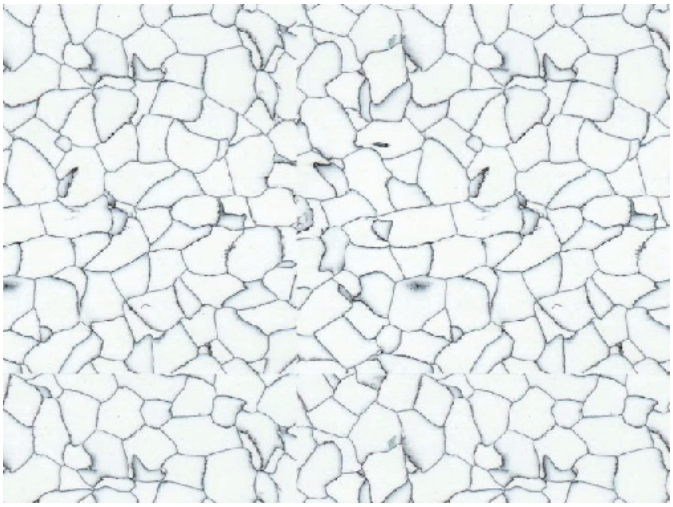

AS-0002 Techno Ice

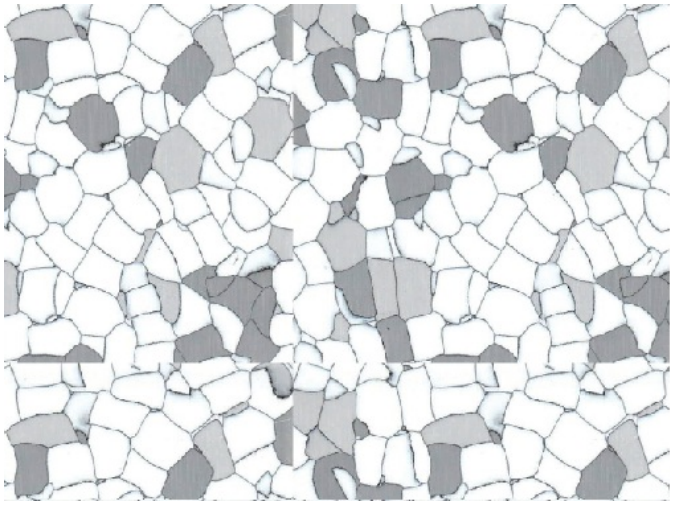

AS-0112 Electro Pebble



ESD Accessories



Antistatic ESD Homogeneous Flooring in use

Printed and on-screen colours are a guide. Please confirm your choice against an actual sample.

Specification and care

Description

Property	Standard	Unit	Value
Total Thickness	EN 428	mm	2
Weight	EN 430	g/m^2	3400
Width / Length of Sheet	EN 426	mm	600 x 600

Classification

Property	Standard	Unit	Value
Standard / Product Specification	EN 649	-	Homogeneous vinyl flooring
European Classification	EN 685	class	34 - 43
K rating	-	-	K5
Fire Rating	EN 13 501 - 1	-	Class Bfl - S1
	ASTM 648	-	Class 1
Electrical Resistance	EN 1081	Ohm	$10^6 \leq R \leq 10^8$
	CEI 61340-4-1	Ohm	$10^6 \leq R \leq 10^9$
	ASTM / ESD 7.1	Ohm	$10^6 \leq R \leq 10^8$
Static Electrical Propensity	EN 1815	V	< 200
	CEI 61340-4-5	V	<200
Slip Resistance Dry	pr EN 13893	-	DS
Slip Resistance Wet	DIN 51 130	-	R9

Performances

Property	Standard	Unit	Value
Wear Resistance	EN 660.1	mm	≤ 0.30
Wear Group	EN 649		M
Dimensional Stability	EN 434	%	sheet≤ 0.40 / tile≤ 0.25
Residual Indentation	EN 433	mm	≤ 0.10
Thermal Conductivity	EN 12 524	W / (m.K)	0,25
Colour Fastness	EN 20 105 - B02	-	≥ 6
Chemical Resistance	EN 423	-	Good
Anti Bacterial and Fungicidal	EN ISO 846	-	Yes

Installation

Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp proof membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18 - 24°C. Matching welding rods are required for heat welding on ground floor

Maintenance

An emulsion dressing is required. Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floor covering should be maintained with regular sweeping and mopping using a neutral cleanser, more intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.

Durafloor Industries Sdn. Bhd.
(122259-H)
Tel and WhatsApp 012-3222160
durafloor@hotmail.com
www.durafloor.com.my

HQ Wisma Durafloor
65, Jalan PBS 14/2, Taman
Perindustrian Bukit Serdang,
43300 Seri Kembangan, Selangor

Factory
17, Persiaran Zurah 1, Pusat
Perindustrian Zurah,
Mukim Rasa, 44200 Daerah Hulu
Selangor, Selangor