



# The resurgence of the linear optics interferometer — recent advances & applications

Si-Hui Tan<sup>a,b</sup>, Peter P. Rohde<sup>c,\*</sup>

<sup>a</sup>Singapore University of Technology and Design, Singapore University of Technology and Design, 8 Somapah Rd, Singapore 487372

<sup>b</sup>Centre for Quantum Technologies, National University of Singapore, Block S15, 3 Science Drive 2, Singapore 117543, Singapore

<sup>c</sup>Centre for Quantum Software & Information (CQSI), Faculty of Engineering & Information Technology, University of Technology Sydney, NSW 2007, Australia

## ARTICLE INFO

### Article history:

2000 MSC: 41A05, 41A10, 65D05, 65D17

Keywords: Keyword1, Keyword2, Keyword3

## ABSTRACT

Linear optics has seen a resurgence owing to its miniaturisation on-chip, and increase in production efficiency and quality of single photons. Time-bin encodings have also become feasible owing to fresh architecture, and processing capabilities. Theoretical efforts to find useful application beyond a full universal quantum computation has also bore fruit. A sampling task, known as BOSONSAMPLING that is easily implemented using linear optics but is strongly believed to be a hard for a classical computer, has emerged.

© 2017 Elsevier B. V. All rights reserved.

## 1. Introduction

Technical advancements in linear optics have been made on many fronts that make it increasingly attractive for quantum computing applications. It is possible now to put single-photon sources and detectors together with linear-optical networks on a silica chip. The advantage of using such integrated photonics over bulk optics is that it is more stable against phase fluctuations, and miniaturized. This increases the scalability of optical implementations of quantum information protocols. Having all components on chip reduces coupling losses which would be crucial for fault-tolerance. An optical implementation of quantum protocols can potentially piggyback on existing communication infrastructure. Combined with the relative ease of transporting quantum states of light, as compared to say trapped ions or superconducting qubits, linear optics forms a powerful platform for quantum information processing.

In the last decade, single photons have been produced mainly through a nonlinear optical process known as spontaneous parametric down-conversion (SPDC), a nonlinear optical process. SPDC produces single photons in correlated pairs that has been a staple source of entanglement. Through developments in production, the number of high quality indistinguishable photons that can be simultaneously produced have increased steadily over the years. Single-photon pairs, once a novelty, are now run-of-the-mill business for quantum optical labs, and three photons have become the standard benchmark. Experiments using up to ten photons have been demonstrated. We have also seen the meteoric rise of quantum dots in the role for producing single photons. It is now possible to use a quantum dot to produce

\*Corresponding author: [dr.rohde@gmail.com](mailto:dr.rohde@gmail.com) ; <http://www.peterrohde.org>

multiple single photons which are highly indistinguishable. Quantum dots produce single photons on demand, a significant advantage over SPDC which is an inherently probabilistic process.

Another approach to linear optics is to pack more features known as degrees of freedom onto a single photon, and to increase the degree of control over them. It is possible to manipulate degrees of freedom like polarization, time-of-arrival, and orbital angular momentum [1, 2, 3, 4, 5]. Such methods open up new ways to engineer quantum states and quantum operations, and expand the toolbox of baseline resources we have for implementing quantum computations, which could prove crucial in the race to achieve quantum supremacy.

We begin in Section 2 with an overview of the mathematical treatment of linear optical transformation on single photons, and in Section 3 with a description of some commonly used qubit encodings. Any unitary transformation acting on the spatial label of single photons can be efficiently decomposed into a network of beamsplitters and phase-shifters. We discuss this, and an extension to handle additional internal states, in Section 4. For applying any linear optical circuit, one needs an accurate description of its unitary representation. A full quantum tomography is costly and time-consuming. Some practical methods have been devised to do this reconstruction without resorting to tomography, and these are described in Section 5.

## 2. Mathematical background

A single photon in a quantum interferometer is described by its creation and annihilation operators,  $\hat{a}_j^\dagger$  and  $\hat{a}_j$  respectively, where  $j$  is the mode label of the interferometer. These operators satisfy the bosonic commutation relationship  $[\hat{a}_j, \hat{a}_k^\dagger] = \delta_{j,k}$ . The action of a  $2d$ -port linear optical interferometer that has an equal number of input and output ports is expressed as an application of unitary operations on the creation operators,

$$b_i^\dagger = \sum_{j=1}^d U_{ij} a_j^\dagger, \quad (1)$$

where  $a_j^\dagger$  and  $b_i^\dagger$  are the creation operators of a single input and output photon in the  $j$ -th and  $i$ -th modes respectively, and  $U \in SU(d)$ . All such transformations can be expressed as sequences of beamsplitters and phase-shifters [6] (see Section 4). By convention, the interferometer is assumed to act only on the spatial mode of the input state.

Additional quantum labels are added to the creation and annihilation operators when other degrees of freedom, such as polarization, orbital angular momentum, and time-bins, are present. In this case, their commutator relation is

$$[\hat{a}_{j,\alpha}, \hat{a}_{k,\beta}^\dagger] = \delta_{j,k} \delta_{\alpha,\beta}, \quad (2)$$

where  $\alpha$  and  $\beta$  represent these other degrees of freedom. As a consequence, quantum interference between multiple photons only occur when all quantum labels are the same. It is also possible to derive an analogous decomposition to that of Reck *et al.* that realizes the unitary transformation on such photons as a sequence of beamsplitters and internal transformations.

Control of indistinguishability of these photons may enable future applications. Mathematical methods have been developed to deal with partial distinguishabilities among interfering photons, including those using group theory [7, 8, 9], and quantum-to-classical transitions [10]. Recently, by controlling multiple degrees of freedom of single photons, genuine three-photon interference that has no independent entanglement between any two subpairs of photons was demonstrated [11, 12].

## 3. Optical encoding of quantum information on single-photons

Using quantum states of light, there are a multitude of approaches to encoding quantum information. Beginning with a logical qubit,

$$|\psi\rangle_L = \alpha|0\rangle_L + \beta|1\rangle_L, \quad (3)$$

we now discuss the most prominent such encodings, which have been widely employed. We will specifically focus on single-photon encodings, as opposed to, for example, continuous variable encodings.

These encodings are all isomorphic to one another, but nonetheless, because they are represented using entirely different physical systems, they each exhibit their own unique advantages and disadvantages, and methods by which to implement operations upon them.

### 3.1. Polarisation

In polarisation encoding, the polarisation of a single photon in a single spatial mode encodes a logical qubit. Specifically, we represent the logical qubit as,

$$|\psi\rangle_L = \alpha|H\rangle + \beta|V\rangle, \quad (4)$$

where  $H$  ( $V$ ) denotes a horizontally (vertically) polarised single photon.

Polarisation encoding has the elegance that the most common optical error mechanisms, such as loss or path-length mismatch, affect the two logical basis states equally. Furthermore, single-qubit operations may be directly implemented using wave-plates, which implement a rotation in polarisation space. Relevant to the preparation of large entangled states, such as cluster states, polarising beamsplitters can be employed to perform non-deterministic Bell state projections.

When physically constructing protocols based on polarisation-encoding, for obvious reasons it is extremely important that optical components be polarisation-preserving. Not doing so would obviously corrupt the logical state. Some waveguide technologies, for example, exhibit different refractive indices for the two polarisations.

### 3.2. Dual-rail

In dual-rail encoding, a single photon encodes a logical qubit as a superposition across two spatial modes,

$$|\psi\rangle_L = \alpha|1, 0\rangle + \beta|0, 1\rangle, \quad (5)$$

where  $|i, j\rangle$  is a two-mode state with  $i$  ( $j$ ) photons in the first (second) spatial mode. Using this encoding, phase-shifters and beamsplitters between the two spatial modes implement arbitrary single-qubit operations. Converting between polarisation- and dual-rail-encoding is trivial using polarising beamsplitters, which separate horizontal and vertical components into distinct spatial modes, or vice-versa.

Unfortunately, because the two basis states evolve via independent paths, our dual-rail qubits are susceptible to path-length-mismatch, a problem that does not affect polarisation encoding. Nonetheless, there are certain advantages to using two paths as opposed to one as is the case in single-rail encoding where the presence or absence of a photon denotes the logical bit. The loss of a photon in a dual-rail qubit is easily noted by its absence, whereas in a single-rail encoding, it would have been confused for one of the states. Moreover, a no-go result precludes universal quantum computation using just linear optics without the use of measurements in a single-rail encoding [13], thus making dual-rail encoding a more attractive alternative.

### 3.3. Time-bins

Time-bin qubits encode quantum information into the time-of-arrival of single photons, which have fixed polarisation and reside in a single spatial mode. Effectively, we discretise the direction of propagation of photons into discrete bins, which are treated as orthogonal basis states. Specifically, we are employing the encoding,

$$|\psi\rangle_L = \alpha|1\rangle_t|0\rangle_{t+\tau} + \beta|0\rangle_t|1\rangle_{t+\tau}, \quad (6)$$

where  $|0\rangle_t$  ( $|1\rangle_t$ ) denotes the vacuum (single-photon) state with arrival time  $t$ . Here  $\tau$  is the time-bin separation, which must be sufficiently large that the temporal envelopes of neighbouring photons do not overlap, thereby ensuring orthogonality of the logical basis states.

This encoding is particularly resource-savvy, since a single spatial mode (e.g length of optical fibre) can encapsulate many time-bin qubits as a ‘time-bin-train’. The amount of quantum information that can be encoded into the train is limited only by its physical length.

Unlike polarisation or dual-rail encoding, time-bin encoding does not lend itself to ‘native’ single-qubit operations. Rather, fast switching can be used to spatially separate neighbouring time-bins, implement a beamsplitter operation between them, before converting back to time-bin encoding. An experiment has built on this idea to implement a two-qubit gate by fast switching to a polarization basis [4]. Another promising advance is an ultrafast measurement technique for time bins based on converting into frequency bins [5]. Scalable networks using time-bin encoding are also possible using a loop-based architecture [14]. This is discussed in more detail in Section 7.3.

#### 4. Efficient circuit decompositions of linear optics networks

The task of implementing an arbitrary quantum computation on linear optics comes down to implementing an arbitrary  $n \times n$  unitary matrix. If a non-unitary transformation is desired, it can be embedded within a unitary matrix with larger dimensions. An algorithm for expressing an arbitrary unitary matrix *exactly* in terms of a sequence of beamsplitters and phase-shifters was described by Reck *et al.* [6]. This decomposition requires  $O(n^2)$  linear optical elements, and the algorithm for finding the decomposition has polynomial runtime. Thus, such decompositions can always be determined and implemented efficiently. The layout for the original Reck *et al.* decomposition is shown in Fig. 1. However, since then a multitude of alternate decompositions have been found. A notable downside of the original decomposition is that different photons experience different circuit depth, i.e. pass through different numbers of optical elements, resulting in asymmetry in losses and the accumulation of errors.

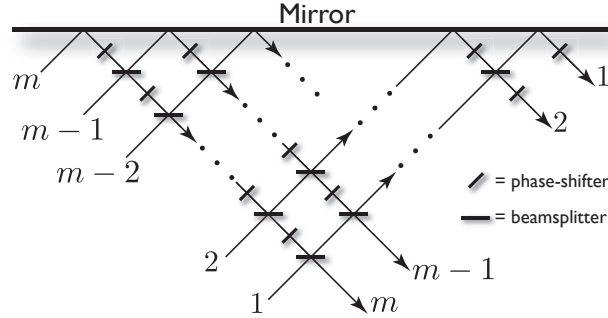


Fig. 1: Efficient decomposition of arbitrary linear optics networks into a sequence of beamsplitters and phase-shifters.

Alternatively, Mach-Zedner interferometers can also be employed as building blocks instead of beamsplitters and phase-shifters [15]. Later, it was shown that any nontrivial beamsplitter, that does more than permuting modes or adding phases to them, is universal for linear optics [16]. However, they do not provide an explicit construction for arbitrary unitaries.

If the linear optical transformations can be realized on various degrees of freedom of light, then it is possible to realize a  $n \times n$  arbitrary unitary transformation, where  $n = n_s n_p$  for  $n_s$  spatial modes, and  $n_p$  internal modes, by a sequence of  $O(n_s^2 n_p)$  beamsplitters and  $O(n_s^2)$  internal transformations [17]. This approach reduces the required number of beamsplitters but increases the total number of optical elements needed by a factor of 2.

#### 5. Reconstructing the linear optical network

In many practical situations, the structure of a linear optical device in terms of its constituent beamsplitters and phase-shifters is known once it is built. However, owing to manufacturing imperfections, a precise characterization of these devices may still be needed post-production. One approach for achieving this is via quantum process tomography [18, 19, 20, 21]. However, quantum process tomography is an expensive approach in terms of the number of measurements required to characterize the network, with exponential overhead, becoming impractical for large optical networks which can contain hundreds of modes using present-day technology [22]. To mitigate this problem, alternative characterization protocols have been developed using quantum interference of various quantum light sources [23, 24] in the linear optical device.

Generally, the unitary matrices of  $d \times d$  linear optical devices are complex  $U_{ij} = r_{ij} e^{i\theta_{ij}}$ , where  $0 \leq r_{ij} \leq 1$ , and  $0 \leq \theta_{ij} \leq 2\pi$ . To characterize these numbers, one can do so by injecting one- and two-photon states into the network with correlated photon detection [23]. With some mathematical simplifications, the first row and first column elements can be reduced to real numbers, and then found via one-photon transmissions. The remaining  $r_{ij}$  and  $\theta_{ij}$  parameters can then be written in terms of these real parameters, and the visibility of two-photon inputs. An increased accuracy in the characterization is possible by estimating and correcting systematic errors that arise due to mode mismatch [25]. Others have used numerical methods to find the closest parameters that yield the observed visibilities [26, 27].

A similar method to that of Laing and O'Brien [23] uses coherent states instead of Fock states [24, 28] to probe the interferometer. Such states are produced by a standard laser source, thus reducing experimental resources. The  $r_{jk}$  terms are found by the square root of the ratios of output intensities at the  $k$ th port to the input intensity at the  $j$ th port.

The remaining phases  $\theta_{ij}$  are found by the interference pattern given by a two-mode coherent state  $|\alpha_1\rangle|\alpha_2\rangle$  created by splitting a single coherent state on a 50-50 beamsplitter, and then imparting a relative phase,  $\phi$ , between them. The states  $|\alpha_1\rangle$  and  $|\alpha_2\rangle$  are input into port 1, and  $j$  respectively. The output intensity at the  $k$ th port is then

$$I_k = I(r_{1k}^2 + r_{jk}^2 + 2r_{1k}r_{jk}\cos(\phi + \theta_{jk})), \quad (7)$$

where  $\theta_{jk} = 0$  for  $k = 1$ , and  $I$  is the intensity of the input coherent states. By scanning the phase shift  $\phi$  and locating the maximum value of  $I_k$  for  $j = 2, \dots, m$ , all unknown phases can be found via  $\theta_{jk} = 2\pi - \phi$ . An elegant extension of the scheme of Rahimi-Keshari *et al.* removes the need for precise control of the phase-shift  $\phi$  [28] by suggesting instead to plot the output intensity  $I_k$  with respect to the input intensity  $I$ . In time, the natural drift in the laser source will cause this plot to trace out an ellipse, known as a Lissajous figure, whose orientation and direction of evolution will give the phase  $\theta_{jk}$  and its sign respectively.

## 6. State preparation

The photonic states that are most commonly employed in linear optics protocols can be divided into Fock states (e.g single-photon), and entangled states, such as EPR, GHZ and cluster states. We will consider advances in each of these.

### 6.1. Fock states

Sources of single photons for applications in quantum information processing can be separated into two main categories: those produced by spontaneous parametric down-conversion (SPDC), and those by solid-state emitters in a cavity. Both categories have seen major development recently in photon-number, with high fidelities. To-date, SPDC has been able to produce up to ten entangled photons [29, 30], and five-photon quantum interference has been reported using a quantum dot emitter in a microcavity [31].

In SPDC, a nonlinear crystal with a large  $\chi^{(2)}$  non-linearity is pumped with a strong coherent state (i.e laser source) and with a small probability, the pump beam is absorbed by the crystal to produce two beams of lower energy known as the signal and idler. Owing to conservation of energy and momentum, the two beams have spatio-temporal correlations that can be engineered to produce twin-beam states with perfect photon number correlation, of the form

$$|\psi\rangle_{\text{SPDC}} = \sqrt{1 - \chi^2} \sum_{n=0}^{\infty} \chi^n |n, n\rangle, \quad (8)$$

where  $\chi$  is the squeezing parameter. If a single photon were to be detected in one of the modes, it is certain that the other mode would similarly contain a single photon.

Solid-state single photon sources come from semiconducting nanostructures and nitrogen vacancies (NV) centers in diamond. Both types are versatile and efficient sources of single photons, however, the photons they produce have suffered from the lack of indistinguishability that is necessary for typical quantum information processing applications. Recent developments in the former have been very promising. Notably, much progress has been made using resonant excitation of quantum dots. Here, laser pulses are used to excite their electronic resonance and trigger the emission of single photons [32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43]. An architecture that embeds the quantum dot in a micropillar cavity uses a resonant effect to achieve higher production efficiency and better photon purity [44, 45]. Using a time-bin loop-based architecture [14] on a stream of such photons, quantum interference was demonstrated between five indistinguishable photons [31].

### 6.2. Einstein-Podolsky-Rosen (EPR) pairs

An EPR pair, or Bell pair, is one of the four states,

$$\begin{aligned} &|0\rangle_A|0\rangle_B \pm |1\rangle_A|1\rangle_B, \text{ and} \\ &|1\rangle_A|0\rangle_B \pm |0\rangle_A|1\rangle_B, \end{aligned} \quad (9)$$

which are all maximally entangled and locally equivalent to one another. These are the simplest examples of entangled states, and their preparation via SPDC has been the mainstay of entangled state preparation for quantum optical processing. In some applications, it may be desired to have the EPR pairs conditionally prepared, *i.e.* successfully prepared only under certain measurement outcomes of auxiliary modes. Several theoretical approaches have been proposed for this purpose [46, 47, 48], and demonstrated [49, 50].

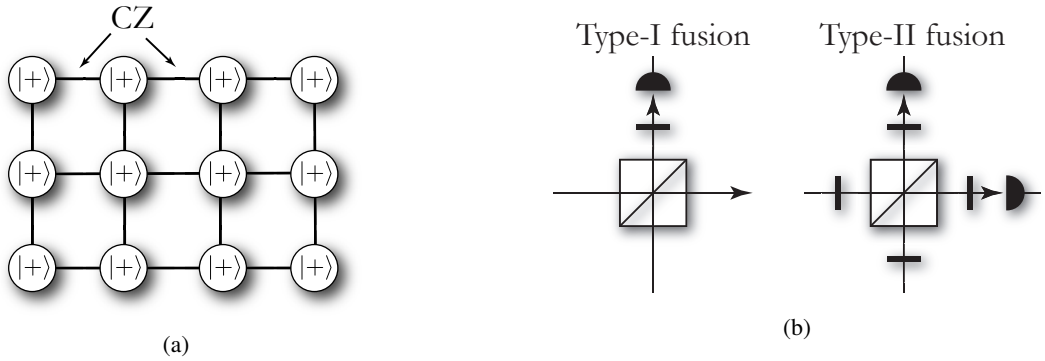


Fig. 2: (a) The representation of cluster states as a graph. Vertices represent qubits initialised into the  $|+\rangle$  state, while edges represent the application of  $\text{CPhase}$  gates, the ordering of which is irrelevant. (b) Fusion gates for joining smaller cluster states into larger ones. Both require only a single polarising beamsplitter, and waveplates. The type-I and -II fusion gates consume 1 or 2 qubits (photons) respectively, creating an edge between the remaining graphs. The type-I gate consumes one fewer photon, but requires number-resolved detection on the detected mode. The type-II gate requires only on/off photodetection, but consumes an additional photon. Thus, the type-I gate can be employed to fuse two Bell pairs into a 3-qubit cluster state, whereas the type-II gate will only grow clusters when beginning with at least 3 qubits per cluster.

### 6.3. Greenberger-Horne-Zeilinger (GHZ) states

GHZ states form a class of entangled quantum states on multiple subsystems with at least three parties [51]. For qubit encodings with  $n$  subsystems, a GHZ state is of the form

$$|\Psi_n^{(\text{GHZ})}\rangle = \frac{|0\rangle^{\otimes n} + |1\rangle^{\otimes n}}{\sqrt{2}}. \quad (10)$$

These states are also non-local, and have been used extensively in experimental test for non-locality [52, 53]. This has been a subject matter covered in detail by another review [54].

### 6.4. Cluster states

Cluster states form another class of multiparty entangled states, and were conceived in the context of arrays of qubits with an Ising-type interaction [55].

These states can be represented as a graph, in which vertices are qubits initialized into the superposition state  $|+\rangle = \frac{1}{\sqrt{2}}(|0\rangle + |1\rangle)$ , with  $\text{CPhase}$  operation applied between edges, as shown in Fig. 2a. For this reason, such states are also referred to as graph states. The  $\text{CPhase}$  operations generate entanglement between the qubits, and because they commute, are independent of ordering. Cluster states are a resource state for a model of quantum computation known as measurement-based quantum computation (MBQC). Here, having such a state as a resource enables universal quantum computation using only single-qubit measurements [56]. Therefore, the preparation of such states is highly valuable, generating much interest in their efficient preparation.

Unfortunately, implementing  $\text{CPhase}$  gates using linear optics is complicated and highly non-deterministic. A major improvement upon this is to use fusion gates - rotated polarising beamsplitters, which implement projections onto the Bell states. These operations fuse smaller cluster states, represented using polarisation encoding, into larger ones, consuming one (type-I fusion) or two (type-II fusion) photons in the process. These operations are shown in Fig. 3b. Although these operations are non-deterministic with a success probability of  $1/2$ , they require only a single beamsplitter, already a major improvement over directly implementing  $\text{CPhase}$  gates. Furthermore, unlike  $\text{CPhase}$  gates, fusion operations require only high Hong-Ou-Mandel visibility, rather than the Mach-Zehnder stability required within existing  $\text{CPhase}$  gate implementations, a major experimental simplification.

Although these gates are non-deterministic and consume qubits, strategies have been described for efficiently preparing arbitrarily large cluster states of arbitrary topology, and using far fewer optical elements than by directly employing  $\text{CPhase}$  gates.

## 7. Linear optical networks

Numerous experimental implementations of various linear optics protocols have been demonstrated, using a variety of architectures. The main contenders considered to date are: bulk-optics; waveguides; and time-bin encoding.

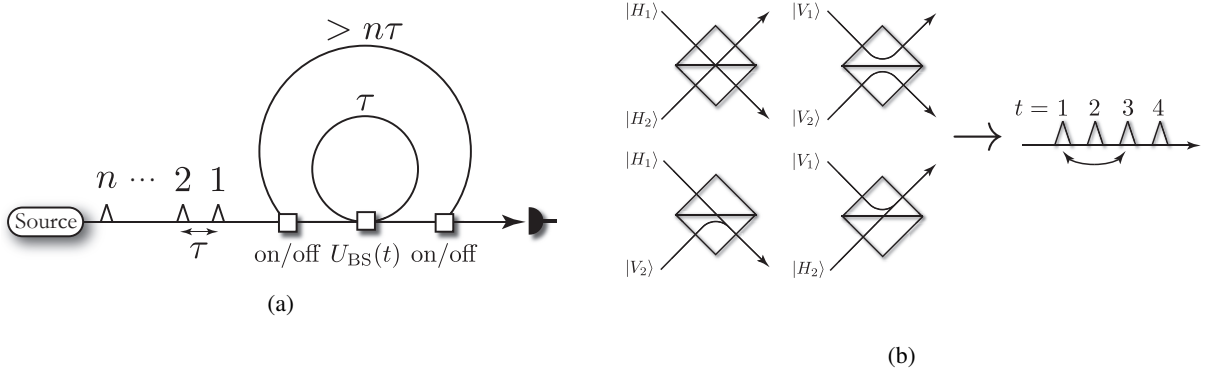


Fig. 3: (a) A fibre-loop architecture for implementing arbitrary linear optics operations upon a time-bin-encoded pulse-train. (b) Mapping between two polarisation-encoded qubits undergoing a polarising beamsplitter (PBS) operation, and its equivalent representation using 4 time-bins in a pulse-train. The PBS completely reflects (transmits) the vertical (horizontal) polarisations. The evolution of the four logical basis states, and their respective outputs, are shown explicitly. Writing out this PBS transformation in matrix form yields a permutation. Taking this permutation and relabelling the modes, we obtain the time-bin transformation shown underneath – a simple swap of two of the four time-bins.

### 7.1. Bulk-optics

The early implementations of linear optics protocols relied on bulk-optics implementations, in which a circuit is decomposed into a discrete arrangement of optical components, specifically beamsplitters and phase-shifters. This corresponds to a direct implementation of the Reck *et al.* decomposition shown in Fig. 1, or subsequent alternate decompositions.

Although this approach is effective and conceptually straightforward, it is highly impractical for large interferometers. For example, the implementation of a 100-mode interferometer requires on the order of 10,000 discrete optical elements, which must all be simultaneously aligned with interferometric stability, a highly experimentally challenging problem, not to mention incredibly physically large.

### 7.2. Waveguides

Alternately, integrated waveguide devices can be employed to implement identical decompositions by etching the modes into paths in an optical chip, where evanescent coupling between closely neighbouring modes implements beamsplitter operations. Such devices are extremely compact, allowing the miniaturisation of large numbers of optical elements. Importantly, such devices are extremely optically stable, mitigating the need for any kind of dynamic stabilisation

### 7.3. Time-bins

Using time-bin encoding of optical qubits, the obvious question is how to perform operations upon them. In [14], a dual-loop architecture was presented for implementing arbitrary passive linear-optics on photonic pulse-trains with time-bin separation  $\tau$ , shown in Fig. 3a. The inner loop has length exactly  $\tau$ , while the outer one has length  $> n\tau$  ( $n$  is the number of optical modes). The architecture is controlled via three dynamically controlled beamsplitters. The first and last need only be on/off switches, whose sole purpose is to couple in the prepared pulse-train, keep it within the outer loop for the required duration, and then couple out of the outer loop, yielding the transformed pulse-train. The central beamsplitter must be able to implement arbitrary classically-controlled beamsplitter operations.

The architecture is frugal in its use of optical components, requiring only three dynamic beamsplitters, and several lengths of fibre. The beauty of this architecture is that the experimental requirements do not increase with the number of optical modes. The only parameter that scales with the number of optical modes is the outer loop, which must be at least long enough to house the entire time-bin-encoded pulse-train. Note, however, that the central beamsplitter must be controllable at sub- $\tau$  time-scales, so as to enable each temporal mode to be addressed individually, which is technically challenging.

The workings of the scheme can be thought of as follows: the inner loop allows arbitrary beamsplitter operations between neighbouring time-bins; the outer loop does nothing interferometric, but rather enables the pulse-train to

undergo as many applications of the inner loops as necessary. It then follows that this scheme is universal for linear optics, as a sufficient number of beamsplitter operations between neighbouring modes enables universal decompositions, using for example, the Reck *et al.* decomposition described in Section 4.

As a simple example of how such time-bin encoding maps to other encodings, in Fig. 3 we show the isomorphism between the polarising beamsplitter operation and a pairwise temporal beamsplitter operation. This implies a direct mapping for implementing cluster state preparation within the time-bin scheme.

The above description applies to passive linear optics, which is sufficient for protocols such as BOSONSAMPLING, but insufficient for universal optical quantum computation, which requires the addition of ancillary states, and measurement with fast-feedforward. To address this, it was shown in [57] that by dynamically preparing ancillary pulse-trains (from the already-existing source), classically controlled by time-resolved measurements at the output, and changing the switching sequence, we can effectively couple in and out arbitrary subsets of the optical modes, enabling partial measurements to be implemented.

## 8. Photodetection

Broadly speaking, there are two main classes of photodetectors: non-photon-number-resolving (also referred to as bucket, or on/off) detectors, and photon-number-resolving (PNR) detectors. As the names suggest, non-PNR detectors only detect the presence or absence of photons in an incident beam, while PNR detectors are able to measure its number of photons. The outcomes of a PNR detector are described by the measurement projectors,

$$\hat{\Pi}_n = |n\rangle\langle n|, \quad n = 0, 1, \dots, \quad (11)$$

while those of the non-photon-number-resolving detectors are given by

$$\begin{aligned} \hat{\Pi}_{\text{off}} &= \hat{\Pi}_0, \\ \hat{\Pi}_{\text{on}} &= \hat{I} - \hat{\Pi}_{\text{off}}. \end{aligned} \quad (12)$$

Detailed reviews have been written about these detectors [58, 59], so we shall only outline a few notable examples here.

A common example of a non-PNR detector is the avalanche photodiode (APD). These devices are made up of semiconductor material, usually silicon, which generate an electron that quickly generates a cascade of electrons. This avalanche of electrons generate a current that can be measured. APDs are affordable, offer low dark count rates with reasonable efficiency, and can be made to operate in a broad spectrum of wavelengths; from the visible to near-infrared range Superconducting nanowire single-photon detector (SNSPD) is another type of non-PNR detector that has recently become commercially available. This detector uses a narrow superconducting wire that carries a current just below the critical current density, above which the superconducting wire would undergo a phase change back to its normal resistance. This happens when the SNSPD absorbs an incident photon, and the current in the wire would then by-pass it to go through the neighboring region which is at a lower resistance. The voltage spike that ensues is measured to give a photon number count.

PNR detectors are a wonderful addition to the toolbox of linear optics. A notable example is the superconducting transition edge sensor (TES) which has an extremely high quantum efficiency. The principle it operates on is very similar to the SNSPD, but with a much higher sensitivity that allows it to detect the energy of single photons. The visible light photon counter (VLPC) is another kind of PNR detector. The way VLPC works is in principle very similar to the APD, but with an additional layer of silicon that is lightly doped with arsenic (As). Owing to the presence of the As, a single photon absorption event always create an electrical signal that is always of the same magnitude. Thus, the output electrical signal is just proportional to the number of detected photons. Last, PNR detectors can be created by connecting many non-PNR detectors in parallel to one another, and summing the signals at the output. Such an approach has been successfully demonstrated with SNSPD [60], and APDs [61, 62, 30].

The dominant challenge facing the experimental implementation of both types of detectors is inefficiency due to loss, which results in higher photon-number being confused as having lower photon-number. In some protocols, such as type-II fusion, which relies on coincidence detection, inefficiency is not problematic. However, in most applications, including type-I fusion, this is highly problematic as photon-number confusion results in decoherence via projecting onto the wrong photon-number, unknown to the observer. Other common problems that plague these detectors are dark counts which add spurious counts from the background. APDs suffer from dead-time which is a



period of time following a detection event during which it is inactive. In applications requiring feedforwarding, this is problematic. Although TESs are great detectors, they are expensive because they require cryogenic equipment to function. The multiplexed SNSPDs suffer from the same constrain and also from low quantum efficiencies. While spatially multiplexed APDs are relatively cheap, they suffer from spurious counts known as crosstalk that arises from avalanches triggered by electrons launched from neighboring APDs [63, 61, 64]. Given the important role of detectors in linear optical quantum computation (see Section 9.1), more could be done to improve them.

## 9. Applications for linear optics interferometry

### 9.1. Linear optical quantum computation (LOQC)

The advancements in linear optics have opened up avenues for implementation. One of the key requirements is nonlinear couplings between the different optical modes. Photons do not naturally interact with one another so some careful engineering is needed to achieve this coupling. Methods used include measurements and feedforwarding [65], and photon-atom interactions [66]. The former requires non-deterministic operations, which succeed only part of the time and have to be repeated. This can be challenging given the limited resources to begin with. Comprehensive reviews have been written previously to cover this topic [54, 67], hence we will focus on recent advances.

Integrated photonic circuits has greatly improved the feasibility of LOQC. Their small size and interferometric stability enable the requisite quantum interference to happen in certain LOQC settings. Programmable circuits that are reusable have also emerged [68, 69]. This saves resources and lead time for producing new circuits. Combining these chips with existing higher-efficiency sources and detectors will expand their capabilities. Loss can be mitigated by moving all components onto the same chip as the linear optical circuit [70, 71]. What remains is to have fast feedforward also on chip. This might pose the greatest challenge yet for universal LOQC. The bottleneck is in the speed of modulation in the feedforward circuitry; only a handful of experiments have been able to implement adaptive feedforward for the purposes of LOQC [72, 73, 74, 75].

Better single-photon sources (see Section 6.1) are part of the solution. Improvement in control of their degrees of freedom have also led to more efficient designs of circuits [76, 77] that enabled the optical implementation of quantum teleportation of the state of a single photon [78]. In this way, three-qubit [77, 79, 80] and four-qubit [81] gates have also been implemented using LOQC.

Cross-Kerr nonlinearity is a type of nonlinearity implemented through atom-photon interactions. It has been thought for some time that fundamental noise limits in atom-photon interactions will prevent any help for LOQC [82, 83, 84]. However, this belief has been countered by the construction of a CPHASE gate using photons that undergo cross-Kerr interaction [66]. Regardless of who is right in this debate, stronger Kerr nonlinearities have been achieved in the last five years [85, 86, 87, 88], and this avenue remains a tantalizing possibility for deterministic quantum gates.

Although there has been tremendous progress in linear optics, it seems likely that an efficient, and fault-tolerant universal quantum computer will require a hybrid system. Nonetheless, linear optics remains fascinating platform for applications and foundation work.

### 9.2. Boson-sampling

Peter to do this.

### 9.3. Quantum metrology

An archetypal task for quantum metrology is the following: Given a Mach-Zedner interferometer, with an unknown phase shift of magnitude  $\varphi$  inserted in one of the two paths (see Fig. ??), can one deduce  $\varphi$  via a judicious use of quantum states and measurements with a higher sensitivity than that of a completely classical interferometer? It is well-known that one indeed can, and the standard deviation,  $\Delta\varphi$ , after  $N$  trials using quantum estimation is

$$\Delta\varphi = \frac{1}{N}, \quad (13)$$

which gets a  $\sqrt{N}$  improvement over classical phase estimation. As this sensitivity is also a fundamental limit arising from Heisenberg's uncertainty principle; we cannot measure definitively the phase, it is known as the Heisenberg

limit. Most famously, a family of entangled states known as NOON states achieve this limit using  $N$  photons in a single trial. A NOON state is a superposition state in which  $N$  photons are either in the first or second path:

$$|\psi_n^{(\text{NOON})}\rangle = \frac{1}{\sqrt{2}}(|N, 0\rangle + |0, N\rangle). \quad (14)$$

Many reviews have been written for quantum metrology and Heisenberg-limited quantum phase estimation [89, 90, 91] so we will not dwell on the history of this application. Instead, we will discuss a new paradigm for quantum metrology that has arisen from our understanding of Boson-sampling.

As discussed in Section 9.2, the resources needed for Boson-sampling is readily available, but executes a task that is believed to be hard classically. Surprisingly, an entanglement between a large number of spatial modes is possible with single photons in a passive linear optical device. This so-called number-path entanglement can be harnessed for quantum metrology without the use of entangled states like the NOON state [92]. Here, the phase shift to be estimated,  $\varphi$ , manifests itself as a linear phase gradient across  $N$  modes (See Fig. 4). By straddling these modes among a quantum Fourier transform and its conjugate operation, it is possible to achieve

$$\Delta\varphi = O\left(\frac{1}{N^{3/2}}\right), \quad (15)$$

with just a string of  $N$  single photons, one photon per mode, for up to at least  $N = 25$  modes.

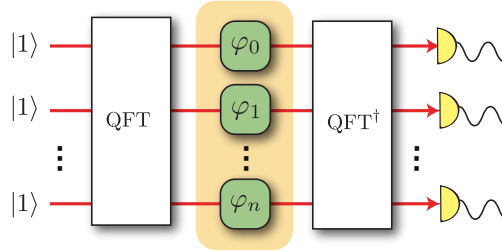


Fig. 4: Architecture of the quantum Fourier transform interferometer for metrology using single-photon states. QFT: Quantum Fourier transform circuit, and  $\varphi_k = (k - 1)\varphi$ . Single photons are injected into the input modes on the left-hand-side, and a  $N$ -fold coincidence measurement is conducted at the output on the right-hand-side.

## 10. Conclusion

Linear optics interferometry has become a leading contender for the implementation of quantum information processing protocols. The preparation, manipulation and measurement of photonic quantum information has become mainstream and widely employed, with impressive experimental accuracies.

We have discussed the various ways in which quantum information can be represented photonically, how they can be manipulated and detected, and some of their leading applications.

Although there are countless physical architectures for the implementation of quantum information processing, and it is far from certain which will win ‘the quantum race for supremacy, optics will always find a home as the only contender for applications involving quantum communication. For this reason, the future of linear optics interferometry is a bright one, which will find inevitable applicability in the future quantum world.

## Acknowledgments

P.P.R. is funded by an ARC Future Fellowship (project FT160100397). This research was supported in part by the Singapore National Research Foundation under NRF Award No. NRF-NRFF2013-01. ST acknowledges support from the Air Force Office of Scientific Research under AOARD grant FA2386-15-1-4082.

## References

- [1] M. Tillmann, S.-H. Tan, S. E. Stoeckl, B. C. Sanders, H. de Guise, R. Heilmann, S. Nolte, A. Szameit, P. Walther, Generalized multiphoton quantum interference, *Phys. Rev. X* 5 (2015) 041015. doi:10.1103/PhysRevX.5.041015.  
URL <http://link.aps.org/doi/10.1103/PhysRevX.5.041015>
- [2] N. Bozinovic, Y. Yue, Y. Ren, M. Tur, P. Kristensen, H. Huang, A. Willner, S. Ramachandran, Terabit-scale orbital angular momentum mode division multiplexing in fibers, *Science* 340 (2013) 1545–1548.
- [3] A. Nicolas, L. Veissier, L. Giner, E. Giacobino, D. Macein, J. Laurat, A quantum memory for orbital angular momentum photonic qubits, *Nat. Photonics* 8 (2014) 234–238.
- [4] P. C. Humphreys, B. J. Metcalf, J. B. Spring, M. Moore, X.-M. Jin, M. Barbieri, W. S. Kolthammer, I. A. Walmsley, Linear optical quantum computing in a single spatial mode, *Phys. Rev. Lett.* 111 (2013) 150501. doi:10.1103/PhysRevLett.111.150501.  
URL <http://link.aps.org/doi/10.1103/PhysRevLett.111.150501>
- [5] J. M. Donohue, M. Agnew, J. Lavoie, K. J. Resch, Coherent ultrafast measurement of time-bin encoded photons, *Phys. Rev. Lett.* 111 (2013) 153602. doi:10.1103/PhysRevLett.111.153602.  
URL <http://link.aps.org/doi/10.1103/PhysRevLett.111.153602>
- [6] M. Reck, A. Zeilinger, H. J. Bernstein, P. Bertani, Experimental realization of any discrete unitary operator, *Phys. Rev. Lett.* 73 (1994) 58–61. doi:10.1103/PhysRevLett.73.58.  
URL <http://link.aps.org/doi/10.1103/PhysRevLett.73.58>
- [7] S.-H. Tan, Y. Y. Gao, H. de Guise, B. C. Sanders,  $Su(3)$  quantum interferometry with single-photon input pulses, *Phys. Rev. Lett.* 110 (2013) 113603. doi:10.1103/PhysRevLett.110.113603.  
URL <http://link.aps.org/doi/10.1103/PhysRevLett.110.113603>
- [8] H. de Guise, S.-H. Tan, I. P. Poulin, B. C. Sanders, Coincidence landscapes for three-channel linear optical networks, *Phys. Rev. A* 89 (2014) 063819. doi:10.1103/PhysRevA.89.063819.  
URL <http://link.aps.org/doi/10.1103/PhysRevA.89.063819>
- [9] H. de Guise, D. Spivak, J. Kulp, I. Dhand,  $d$ -functions and immanants of unitary matrices and submatrices, *J. Phys. A:Math. Theor.* 49 (2016) 09LT01.
- [10] Y.-S. Ra, M. C. Tichy, H.-T. Lim, O. Kwon, F. Mintert, A. Buchleitner, Y.-H. Kim, Nonmonotonic quantum-to-classical transition in multiparticle interference, *Proceedings of the National Academy of Sciences* 110 (4) (2013) 1227–1231. arXiv:<http://www.pnas.org/content/110/4/1227.full.pdf>, doi:10.1073/pnas.1206910110.  
URL <http://www.pnas.org/content/110/4/1227.abstract>
- [11] S. Agne, T. Kauten, J. Jin, E. Meyer-Scott, J. Z. Salvail, D. R. Hamel, K. J. Resch, G. Weihs, T. Jennewein, Observation of genuine three-photon interference, *Phys. Rev. Lett.* 118 (2017) 153602. doi:10.1103/PhysRevLett.118.153602.  
URL <https://link.aps.org/doi/10.1103/PhysRevLett.118.153602>
- [12] A. J. Menssen, A. E. Jones, B. J. Metcalf, M. C. Tichy, S. Barz, W. S. Kolthammer, I. A. Walmsley, Distinguishability and many-particle interference, *Phys. Rev. Lett.* 118 (2017) 153603. doi:10.1103/PhysRevLett.118.153603.  
URL <https://link.aps.org/doi/10.1103/PhysRevLett.118.153603>
- [13] L.-A. Wu, P. Walther, D. A. Lidar, No-go theorem for passive single-rail linear optical quantum computing, *Scientific Reports* 3 (2013) 1394 EP –.  
URL <http://dx.doi.org/10.1038/srep01394>
- [14] K. R. Motes, A. Gilchrist, J. P. Dowling, P. P. Rohde, Scalable boson sampling with time-bin encoding using a loop-based architecture, *Phys. Rev. Lett.* 113 (2014) 120501. doi:10.1103/PhysRevLett.113.120501.  
URL <https://link.aps.org/doi/10.1103/PhysRevLett.113.120501>
- [15] B.-G. Englert, C. Kurtsiefer, H. Weinfurter, Universal unitary gate for single-photon two-qubit states, *Phys. Rev. A* 63 (2001) 032303. doi:10.1103/PhysRevA.63.032303.  
URL <https://link.aps.org/doi/10.1103/PhysRevA.63.032303>
- [16] A. Bouland, S. Aaronson, Generation of universal linear optics by any beam splitter, *Phys. Rev. A* 89 (2014) 062316. doi:10.1103/PhysRevA.89.062316.  
URL <https://link.aps.org/doi/10.1103/PhysRevA.89.062316>
- [17] I. Dhand, S. K. Goyal, Realization of arbitrary discrete unitary transformations using spatial and internal modes of light, *Phys. Rev. A* 92 (2015) 043813. doi:10.1103/PhysRevA.92.043813.  
URL <http://link.aps.org/doi/10.1103/PhysRevA.92.043813>
- [18] M. W. Mitchell, C. W. Ellenor, S. Schneider, A. M. Steinberg, Diagnosis, prescription, and prognosis of a bell-state filter by quantum process tomography, *Phys. Rev. Lett.* 91 (2003) 120402.
- [19] J. L. O'Brien, G. J. Pryde, A. Gilchrist, D. F. V. James, N. K. Langford, T. C. Ralph, A. G. White, Quantum process tomography of a controlled-not gate, *Phys. Rev. Lett.* 93 (2004) 080502. doi:10.1103/PhysRevLett.93.080502.  
URL <https://link.aps.org/doi/10.1103/PhysRevLett.93.080502>
- [20] M. Lobino, D. Korystov, C. Kupchak, E. Figueroa, B. C. Sanders, A. I. Lvovsky, Complete characterization of quantum-optical processes, *Science* 322 (5901) (2008) 563–566. arXiv:<http://science.sciencemag.org/content/322/5901/563.full.pdf>, doi:10.1126/science.1162086.  
URL <http://science.sciencemag.org/content/322/5901/563>
- [21] S. Rahimi-Keshari, A. Scherer, A. Mann, A. T. Rezakhani, A. I. Lvovsky, B. C. Sanders, Quantum process tomography with coherent states, *New Journal of Physics* 13 (1) (2011) 013006.  
URL <http://stacks.iop.org/1367-2630/13/i=1/a=013006>
- [22] N. C. Harris, D. Bunandar, M. Pant, G. R. Steinbrecher, J. Mower, M. Prabhu, T. Baehr-Jones, M. Hochberg, D. Englund, Large-scale quantum photonic circuits in silicon, *Nanophotonics* 5.  
URL <https://www.degruyter.com/view/j/nanoph.ahead-of-print/nanoph-2015-0146/nanoph-2015-0146.xml>
- [23] A. Laing, J. O'Brien, Super-stable tomography of any linear optical device, arXiv: 1208.2868v1.

- [24] S. Rahimi-Keshari, M. A. Broome, R. Fickler, A. Fedrizzi, T. C. Ralph, A. G. White, Direct characterization of linear-optical networks, *Opt. Express* 21 (11) (2013) 13450–13458. doi:10.1364/OE.21.013450.  
URL <http://www.opticsexpress.org/abstract.cfm?URI=oe-21-11-13450>
- [25] I. Dhand, A. Khalid, H. Lu, B. C. Sanders, Accurate and precise characterization of linear optical interferometers, *Journal of Optics* 18 (3) (2016) 035204.  
URL <http://stacks.iop.org/2040-8986/18/i=3/a=035204>
- [26] N. Spagnolo, E. Maiorino, C. Vitelli, M. Bentivegna, A. Crespi, R. Ramponi, P. Mataloni, R. Osellame, F. Sciarrino, Learning an unknown transformation via a genetic approach *arXiv:arXiv:1610.03291v1*.
- [27] M. Tillmann, C. Schmidt, P. Walther, On unitary reconstruction of linear optical networks, *Journal of Optics* 18 (11) (2016) 114002.  
URL <http://stacks.iop.org/2040-8986/18/i=11/a=114002>
- [28] R. Heilmann, M. Grfe, S. Nolte, A. Szameit, A novel integrated quantum circuit for high-order w-state generation and its highly precise characterization, *Science Bulletin* 60 (1) (2015) 96 – 100. doi:<http://doi.org/10.1007/s11434-014-0688-5>.  
URL <http://www.sciencedirect.com/science/article/pii/S2095927316305400>
- [29] X.-L. Wang, L.-K. Chen, W. Li, H.-L. Huang, C. Liu, C. Chen, Y.-H. Luo, Z.-E. Su, D. Wu, Z.-D. Li, H. Lu, Y. Hu, X. Jiang, C.-Z. Peng, L. Li, N.-L. Liu, Y.-A. Chen, C.-Y. Lu, J.-W. Pan, Experimental ten-photon entanglement, *Phys. Rev. Lett.* 117 (2016) 210502. doi:10.1103/PhysRevLett.117.210502.  
URL <https://link.aps.org/doi/10.1103/PhysRevLett.117.210502>
- [30] L.-K. Chen, Z.-D. Li, X.-C. Yao, M. Huang, W. Li, H. Lu, X. Yuan, Y.-B. Zhang, X. Jiang, C.-Z. Peng, L. Li, N.-L. Liu, X. Ma, C.-Y. Lu, Y.-A. Chen, J.-W. Pan, Observation of ten-photon entanglement using thin  $\text{BiBO}$  crystals, *Optica* 4 (1) (2017) 77–83. doi:10.1364/OPTICA.4.000077.  
URL <http://www.osapublishing.org/optica/abstract.cfm?URI=optica-4-1-77>
- [31] H. Wang, Y. He, Y.-H. Li, Z.-E. Su, B. Li, H.-L. Huang, X. Ding, M.-C. Chen, C. Liu, J. Qin, J.-P. Li, Y.-M. He, C. Schneider, M. Kamp, C.-Z. Peng, S. Höffling, C.-Y. Lu, J.-W. Pan, Multi-photon boson-sampling machines beating early classical computers *arXiv:quant-ph:1612.06956*.
- [32] A. Muller, E. B. Flagg, P. Bianucci, X. Y. Wang, D. G. Deppe, W. Ma, J. Zhang, G. J. Salamo, M. Xiao, C. K. Shih, Resonance fluorescence from a coherently driven semiconductor quantum dot in a cavity, *Phys. Rev. Lett.* 99 (2007) 187402. doi:10.1103/PhysRevLett.99.187402.  
URL <https://link.aps.org/doi/10.1103/PhysRevLett.99.187402>
- [33] A. Nick Vamivakas, Y. Zhao, C.-Y. Lu, M. Atatüre, Spin-resolved quantum-dot resonance fluorescence, *Nat Phys* 5 (3) (2009) 198–202.  
URL <http://dx.doi.org/10.1038/nphys1182>
- [34] E. B. Flagg, A. Muller, J. W. Robertson, S. Founta, D. G. Deppe, M. Xiao, W. Ma, G. J. Salamo, C. K. Shih, Resonantly driven coherent oscillations in a solid-state quantum emitter, *Nat Phys* 5 (3) (2009) 203–207.  
URL <http://dx.doi.org/10.1038/nphys1184>
- [35] S. Ates, S. M. Ulrich, S. Reitzenstein, A. Löffler, A. Forchel, P. Michler, Post-selected indistinguishable photons from the resonance fluorescence of a single quantum dot in a microcavity, *Phys. Rev. Lett.* 103 (2009) 167402. doi:10.1103/PhysRevLett.103.167402.  
URL <https://link.aps.org/doi/10.1103/PhysRevLett.103.167402>
- [36] D. Englund, A. Majumdar, A. Faraon, M. Toishi, N. Stoltz, P. Petroff, J. Vučković, Resonant excitation of a quantum dot strongly coupled to a photonic crystal nanocavity, *Phys. Rev. Lett.* 104 (2010) 073904. doi:10.1103/PhysRevLett.104.073904.  
URL <https://link.aps.org/doi/10.1103/PhysRevLett.104.073904>
- [37] Y.-M. He, Y. He, Y.-J. Wei, D. Wu, M. Atatüre, C. Schneider, S. Höffling, M. Kamp, C.-Y. Lu, J.-W. Pan, On-demand semiconductor single-photon source with near-unity indistinguishability, *Nat Nano* 8 (3) (2013) 213–217.  
URL <http://dx.doi.org/10.1038/nnano.2012.262>
- [38] H. Jayakumar, A. Predojević, T. Huber, T. Kauten, G. S. Solomon, G. Weihs, Deterministic photon pairs and coherent optical control of a single quantum dot, *Phys. Rev. Lett.* 110 (2013) 135505. doi:10.1103/PhysRevLett.110.135505.  
URL <https://link.aps.org/doi/10.1103/PhysRevLett.110.135505>
- [39] Y.-J. Wei, Y.-M. He, M.-C. Chen, Y.-N. Hu, Y. He, D. Wu, C. Schneider, M. Kamp, S. Höffling, C.-Y. Lu, J.-W. Pan, Deterministic and robust generation of single photons from a single quantum dot with 99.5% indistinguishability using adiabatic rapid passage, *Nano Letters* 14 (11) (2014) 6515–6519, PMID: 25357153. *arXiv:1409.1531* <http://dx.doi.org/10.1021/nl503081n>, doi:10.1021/nl503081n.  
URL <http://dx.doi.org/10.1021/nl503081n>
- [40] M. Muller, S. Bounouar, K. D. Jons, M. Glassl, M. P., On-demand generation of indistinguishable polarization-entangled photon pairs, *Nat Photon* 8 (3) (2014) 224–228.  
URL <http://dx.doi.org/10.1038/nphoton.2013.377>
- [41] S. Unsleber, C. Schneider, S. Maier, Y.-M. He, S. Gerhardt, C.-Y. Lu, J.-W. Pan, M. Kamp, S. Höffling, Deterministic generation of bright single resonance fluorescence photons from a purcell-enhanced quantum dot-micropillar system, *Opt. Express* 23 (26) (2015) 32977–32985. doi:10.1364/OE.23.032977.  
URL <http://www.opticsexpress.org/abstract.cfm?URI=oe-23-26-32977>
- [42] Y. He, Y.-M. He, Y.-J. Wei, X. Jiang, M.-C. Chen, F.-L. Xiong, Y. Zhao, C. Schneider, M. Kamp, S. Höffling, C.-Y. Lu, J.-W. Pan, Indistinguishable tunable single photons emitted by spin-flip raman transitions in *inGaAs* quantum dots, *Phys. Rev. Lett.* 111 (2013) 237403. doi:10.1103/PhysRevLett.111.237403.  
URL <https://link.aps.org/doi/10.1103/PhysRevLett.111.237403>
- [43] T. M. Sweeney, S. G. Carter, A. S. Bracker, M. Kim, C. S. Kim, L. Yang, P. M. Vora, P. G. Brereton, E. R. Cleveland, D. Gammon, Cavity-stimulated raman emission from a single quantum dot spin, *Nat Photon* 8 (6) (2014) 442–447.  
URL <http://dx.doi.org/10.1038/nphoton.2014.84>
- [44] X. Ding, Y. He, Z.-C. Duan, N. Gregersen, M.-C. Chen, S. Unsleber, S. Maier, C. Schneider, M. Kamp, S. Höffling, C.-Y. Lu, J.-W. Pan, On-demand single photons with high extraction efficiency and near-unity indistinguishability from a resonantly driven quantum dot in a micropillar, *Phys. Rev. Lett.* 116 (2016) 020401. doi:10.1103/PhysRevLett.116.020401.  
URL <https://link.aps.org/doi/10.1103/PhysRevLett.116.020401>

- [45] H. Wang, Z.-C. Duan, Y.-H. Li, S. Chen, J.-P. Li, Y.-M. He, M.-C. Chen, Y. He, X. Ding, C.-Z. Peng, C. Schneider, M. Kamp, S. Höfling, C.-Y. Lu, J.-W. Pan, Near-transform-limited single photons from an efficient solid-state quantum emitter, *Phys. Rev. Lett.* 116 (2016) 213601. doi:10.1103/PhysRevLett.116.213601.  
URL <https://link.aps.org/doi/10.1103/PhysRevLett.116.213601>
- [46] T. B. Pittman, M. M. Donegan, M. J. Fitch, B. C. Jacobs, J. D. Franson, P. Kok, H. Lee, J. P. Dowling, Heralded two-photon entanglement from probabilistic quantum logic operations on multiple parametric down-conversion sources, *IEEE Journal of Selected Topics in Quantum Electronics* 9 (6) (2003) 1478–1482. doi:10.1109/JSTQE.2003.820916.
- [47] C. Śliwa, K. Banaszek, Conditional preparation of maximal polarization entanglement, *Phys. Rev. A* 67 (2003) 030101. doi:10.1103/PhysRevA.67.030101.  
URL <https://link.aps.org/doi/10.1103/PhysRevA.67.030101>
- [48] P. Walther, M. Aspelmeyer, A. Zeilinger, Heralded generation of multiphoton entanglement, *Phys. Rev. A* 75 (2007) 012313. doi:10.1103/PhysRevA.75.012313.  
URL <https://link.aps.org/doi/10.1103/PhysRevA.75.012313>
- [49] C. Wagenknecht, C.-M. Li, A. Reingruber, X.-H. Bao, A. Goebel, Y.-A. Chen, Q. Zhang, K. Chen, J.-W. Pan, Experimental demonstration of a heralded entanglement source, *Nat Photon* 4 (8) (2010) 549–552.  
URL <http://dx.doi.org/10.1038/nphoton.2010.123>
- [50] S. Barz, G. Cronenberg, A. Zeilinger, P. Walther, Heralded generation of entangled photon pairs, *Nat Photon* 4 (8) (2010) 553–556.  
URL <http://dx.doi.org/10.1038/nphoton.2010.156>
- [51] D. M. Greenberger, M. A. Horne, A. Z. (edited by M. Kafatos), *Going beyond Bell’s theorem*, Kluwer Academic, Dordrecht, The Netherlands, 1989, p. 73.
- [52] J.-W. Pan, D. Bouwmeester, M. Daniell, H. Weinfurter, A. Zeilinger, Experimental test of quantum nonlocality in three-photon greenberger-horne-zeilinger entanglement, *Nature* 403 (6769) (2000) 515–519.  
URL <http://dx.doi.org/10.1038/35000514>
- [53] C. Zhang, Y.-F. Huang, Z. Wang, B.-H. Liu, C.-F. Li, G.-C. Guo, Experimental greenberger-horne-zeilinger-type six-photon quantum nonlocality, *Phys. Rev. Lett.* 115 (2015) 260402. doi:10.1103/PhysRevLett.115.260402.  
URL <https://link.aps.org/doi/10.1103/PhysRevLett.115.260402>
- [54] J.-W. Pan, Z.-B. Chen, C.-Y. Lu, H. Weinfurter, A. Zeilinger, M. Żukowski, Multiphoton entanglement and interferometry, *Rev. Mod. Phys.* 84 (2012) 777–838. doi:10.1103/RevModPhys.84.777.  
URL <https://link.aps.org/doi/10.1103/RevModPhys.84.777>
- [55] H. J. Briegel, R. Raussendorf, Persistent entanglement in arrays of interacting particles, *Phys. Rev. Lett.* 85 (2001) 910.
- [56] R. Raussendorf, D. E. Browne, H. J. Briegel, Measurement-based quantum computation on cluster states, *Phys. Rev. A* 68 (2003) 022312.
- [57] P. P. Rohde, Simple scheme for universal linear-optics quantum computing with constant experimental complexity using fiber loops, *Phys. Rev. A* 91 (2015) 012306. doi:10.1103/PhysRevA.91.012306.  
URL <https://link.aps.org/doi/10.1103/PhysRevA.91.012306>
- [58] R. H. Hadfield, Single-photon detectors for optical quantum information applications, *Nat Photon* 3 (12) (2009) 696–705.  
URL <http://dx.doi.org/10.1038/nphoton.2009.230>
- [59] M. Eisaman, J. Fan, A. Migdall, S. Polyakov, Invited review article: Single-photon sources and detectors, *Review of Scientific Instruments* 82. doi:<http://dx.doi.org/10.1063/1.3610677>.  
URL <http://aip.scitation.org/doi/full/10.1063/1.3610677>
- [60] A. Divochiy, F. Marsili, D. Bitauld, A. Gaggero, R. Leoni, F. Mattioli, A. Korneev, V. Seleznev, N. Kaurova, O. Minaeva, G. Gol’tsman, K. G. Lagoudakis, M. Benkhaoul, F. Levy, A. Fiore, Superconducting nanowire photon-number-resolving detector at telecommunication wavelengths, *Nat Photon* 2 (5) (2008) 302–306.  
URL <http://dx.doi.org/10.1038/nphoton.2008.51>
- [61] I. Afek, A. Natan, O. Ambar, Y. Silberberg, Quantum state measurements using multipixel photon detectors, *Phys. Rev. A* 79 (2009) 043830. doi:10.1103/PhysRevA.79.043830.  
URL <https://link.aps.org/doi/10.1103/PhysRevA.79.043830>
- [62] R. Chrapkiewicz, W. Wasilewski, K. Banaszek, High-fidelity spatially resolved multiphoton counting for quantum imaging applications, *Opt. Lett.* 39 (17) (2014) 5090–5093. doi:10.1364/OL.39.005090.  
URL <http://ol.osa.org/abstract.cfm?URI=ol-39-17-5090>
- [63] P. Eraerds, M. Legré, A. Rochas, H. Zbinden, N. Gisin, Sipm for fast photon-counting and multiphoton detection, *Opt. Express* 15 (22) (2007) 14539–14549. doi:10.1364/OE.15.014539.  
URL <http://www.opticsexpress.org/abstract.cfm?URI=oe-15-22-14539>
- [64] D. A. Kalashnikov, S.-H. Tan, T. S. Iskhakov, M. V. Chekhova, L. A. Krivitsky, Measurement of two-mode squeezing with photon number resolving multipixel detectors, *Opt. Lett.* 37 (14) (2012) 2829–2831. doi:10.1364/OL.37.002829.  
URL <http://ol.osa.org/abstract.cfm?URI=ol-37-14-2829>
- [65] E. Knill, R. Laflamme, G. Milburn, A scheme for efficient quantum computation with linear optics, *Nature (London)* 409 (2001) 46.
- [66] D. J. Brod, J. Combes, Passive cphase gate via cross-kerr nonlinearities, *Phys. Rev. Lett.* 117 (2016) 080502. doi:10.1103/PhysRevLett.117.080502.  
URL <https://link.aps.org/doi/10.1103/PhysRevLett.117.080502>
- [67] P. Kok, W. J. Munro, K. Nemoto, T. C. Ralph, J. P. Dowling, G. J. Milburn, Linear optical quantum computing with photonic qubits, *Rev. Mod. Phys.* 79 (2005) 135.
- [68] B. J. Metcalf, J. B. Spring, P. C. Humphreys, N. Thomas-Peter, M. Barbieri, W. S. Kolthammer, X.-M. Jin, N. K. Langford, D. Kundys, J. C. Gates, B. J. Smith, P. G. R. Smith, I. A. Walmsley, Quantum teleportation on a photonic chip, *Nat Photon* 8 (10) (2014) 770–774.  
URL <http://dx.doi.org/10.1038/nphoton.2014.217>
- [69] J. Carolan, C. Harrold, C. Sparrow, E. Martín-López, N. J. Russell, J. W. Silverstone, P. J. Shadbolt, N. Matsuda, M. Oguma, M. Itoh, G. D. Marshall, M. G. Thompson, J. C. F. Matthews, T. Hashimoto, J. L. O’Brien, A. Laing, Universal linear optics, *Science* <http://science.sciencemag.org/content/early/2015/07/08/science.aab3642.full.pdf>, doi:10.1126/science.aab3642.

- URL <http://science.sciencemag.org/content/early/2015/07/08/science.aab3642>
- [70] J. P. Sprengers, A. Gaggero, D. Sahin, S. Jahanmirinejad, G. Frucci, F. Mattioli, R. Leoni, J. Beetz, M. Lerner, M. Kamp, S. Hfling, R. Sanjines, A. Fiore, Waveguide superconducting single-photon detectors for integrated quantum photonic circuits, *Applied Physics Letters* 99 (18) (2011) 181110. [arXiv:http://dx.doi.org/10.1063/1.3657518](http://dx.doi.org/10.1063/1.3657518), doi:10.1063/1.3657518.  
URL <http://dx.doi.org/10.1063/1.3657518>
- [71] J. W. Silverstone, D. Bonneau, K. Ohira, N. Suzuki, H. Yoshida, N. Iizuka, M. Ezaki, C. M. Natarajan, M. G. Tanner, R. H. Hadfield, V. Zwiller, G. D. Marshall, J. G. Rarity, J. L. O'Brien, M. G. Thompson, On-chip quantum interference between silicon photon-pair sources, *Nat Photon* 8 (2) (2014) 104–108.  
URL <http://dx.doi.org/10.1038/nphoton.2013.339>
- [72] R. Prevedel, P. Walther, F. Tiefenbacher, P. Bohl, R. Kaltenback, T. Jennewein, A. Zeilinger, High-speed linear optics quantum computing using active feed-forward, *Nature* 445 (7123) (2007) 65–69.  
URL <http://dx.doi.org/10.1038/nature05346>
- [73] X.-S. Ma, T. Herbst, T. Scheidl, D. Wang, S. Kropatschek, W. Naylor, B. Wittmann, A. Mech, J. Kofler, E. Anisimova, V. Makarov, T. Jennewein, R. Ursin, A. Zeilinger, Quantum teleportation over 143 kilometres using active feed-forward, *Nature* 489 (7415) (2012) 269–273.  
URL <http://dx.doi.org/10.1038/nature11472>
- [74] M. Miková, H. Fikarová, I. Straka, M. Mičuda, J. Fiurášek, M. Ježek, M. Dušek, Increasing efficiency of a linear-optical quantum gate using electronic feed-forward, *Phys. Rev. A* 85 (2012) 012305. doi:10.1103/PhysRevA.85.012305.  
URL <https://link.aps.org/doi/10.1103/PhysRevA.85.012305>
- [75] T.-M. Zhao, H. Zhang, J. Yang, Z.-R. Sang, X. Jiang, X.-H. Bao, J.-W. Pan, Entangling different-color photons via time-resolved measurement and active feed forward, *Phys. Rev. Lett.* 112 (2014) 103602. doi:10.1103/PhysRevLett.112.103602.  
URL <https://link.aps.org/doi/10.1103/PhysRevLett.112.103602>
- [76] X.-Q. Zhou, T. C. Ralph, P. Kalasuwan, M. Zhang, A. Peruzzo, B. P. Lanyon, J. L. O'Brien, Adding control to arbitrary unknown quantum operations, *Nature Communications* 2 (2011) 413 EP –.  
URL <http://dx.doi.org/10.1038/ncomms1392>
- [77] B. P. Lanyon, M. Barbieri, M. P. Almeida, T. Jennewein, T. C. Ralph, K. J. Resch, G. J. Pryde, J. L. O'Brien, A. Gilchrist, A. G. White, Simplifying quantum logic using higher-dimensional hilbert spaces, *Nat Phys* 5 (2) (2009) 134–140.  
URL <http://dx.doi.org/10.1038/nphys1150>
- [78] X.-L. Wang, X.-D. Cai, Z.-E. Su, M.-C. Chen, D. Wu, L. Li, N.-L. Liu, C.-Y. Lu, J.-W. Pan, Quantum teleportation of multiple degrees of freedom of a single photon, *Nature* 518 (7540) (2015) 516–519.  
URL <http://dx.doi.org/10.1038/nature14246>
- [79] M. Mičuda, M. Sedláč, I. Straka, M. Miková, M. Dušek, M. Ježek, J. Fiurášek, Efficient experimental estimation of fidelity of linear optical quantum toffoli gate, *Phys. Rev. Lett.* 111 (2013) 160407. doi:10.1103/PhysRevLett.111.160407.  
URL <https://link.aps.org/doi/10.1103/PhysRevLett.111.160407>
- [80] R. B. Patel, J. Ho, F. Ferreyrol, T. C. Ralph, G. J. Pryde, A quantum fredkin gate, *Science Advances* 2 (3). [arXiv:http://advances.sciencemag.org/content/2/3/e1501531.full.pdf](http://advances.sciencemag.org/content/2/3/e1501531.full.pdf), doi:10.1126/sciadv.1501531.  
URL <http://advances.sciencemag.org/content/2/3/e1501531>
- [81] R. Stárek, M. Mičuda, M. Miková, I. Straka, M. Dušek, M. Ježek, J. Fiurášek, Experimental investigation of a four-qubit linear-optical quantum logic circuit, *Scientific Reports* 6 (2016) 33475 EP –.  
URL <http://dx.doi.org/10.1038/srep33475>
- [82] J. H. Shapiro, Single-photon kerr nonlinearities do not help quantum computation, *Phys. Rev. A* 73 (2006) 062305. doi:10.1103/PhysRevA.73.062305.  
URL <https://link.aps.org/doi/10.1103/PhysRevA.73.062305>
- [83] J. H. Shapiro, M. Razavi, Continuous-time cross-phase modulation and quantum computation, *New J. Phys.* 9 (2007) 16.
- [84] J. Gea-Banacloche, Impossibility of large phase shifts via the giant kerr effect with single-photon wave packets, *Phys. Rev. A* 81 (2010) 043823. doi:10.1103/PhysRevA.81.043823.  
URL <https://link.aps.org/doi/10.1103/PhysRevA.81.043823>
- [85] I.-C. Hoi, A. F. Kockum, T. Palomaki, T. M. Stace, B. Fan, L. Tornberg, S. R. Sathyamoorthy, G. Johansson, P. Delsing, C. M. Wilson, Giant cross-kerr effect for propagating microwaves induced by an artificial atom, *Phys. Rev. Lett.* 111 (2013) 053601. doi:10.1103/PhysRevLett.111.053601.  
URL <https://link.aps.org/doi/10.1103/PhysRevLett.111.053601>
- [86] V. Venkataraman, K. Saha, A. L. Gaeta, Phase modulation at the few-photon level for weak-nonlinearity-based quantum computing, *Nat Photon* 7 (2) (2013) 138–141.  
URL <http://dx.doi.org/10.1038/nphoton.2012.283>
- [87] A. Feizpour, M. Hallaji, G. Dmochowski, A. M. Steinberg, Observation of the nonlinear phase shift due to single post-selected photons, *Nat Phys* 11 (11) (2015) 905–909.  
URL <http://dx.doi.org/10.1038/nphys3433>
- [88] K. M. Beck, M. Hosseini, Y. Duan, V. Vuletić, Large conditional single-photon cross-phase modulation, *Proceedings of the National Academy of Sciences* 113 (35) (2016) 9740–9744. [arXiv:http://www.pnas.org/content/113/35/9740.full.pdf](http://www.pnas.org/content/113/35/9740.full.pdf), doi:10.1073/pnas.1524117113.  
URL <http://www.pnas.org/content/113/35/9740.abstract>
- [89] V. Giovannetti, S. Lloyd, L. Maccone, Quantum-enhanced measurements: Beating the standard quantum limit, *Science* 306 (5700) (2004) 1330–1336. [arXiv:http://science.sciencemag.org/content/306/5700/1330.full.pdf](http://science.sciencemag.org/content/306/5700/1330.full.pdf), doi:10.1126/science.1104149.  
URL <http://science.sciencemag.org/content/306/5700/1330>
- [90] J. P. Dowling, Quantum optical metrology—the lowdown on high-n00n states, *Contemporary Physics* 49 (2) (2008) 125–143. [arXiv:http://dx.doi.org/10.1080/00107510802091298](http://dx.doi.org/10.1080/00107510802091298), doi:10.1080/00107510802091298.  
URL <http://dx.doi.org/10.1080/00107510802091298>
- [91] V. Giovannetti, S. Lloyd, L. Maccone, Advances in quantum metrology, *Nat Photon* 5 (4) (2011) 222–229.

URL <http://dx.doi.org/10.1038/nphoton.2011.35>

- [92] K. R. Motes, J. P. Olson, E. J. Rabeaux, J. P. Dowling, S. J. Olson, P. P. Rohde, Linear optical quantum metrology with single photons: Exploiting spontaneously generated entanglement to beat the shot-noise limit, *Phys. Rev. Lett.* 114 (2015) 170802. doi:10.1103/PhysRevLett.114.170802.

URL <https://link.aps.org/doi/10.1103/PhysRevLett.114.170802>