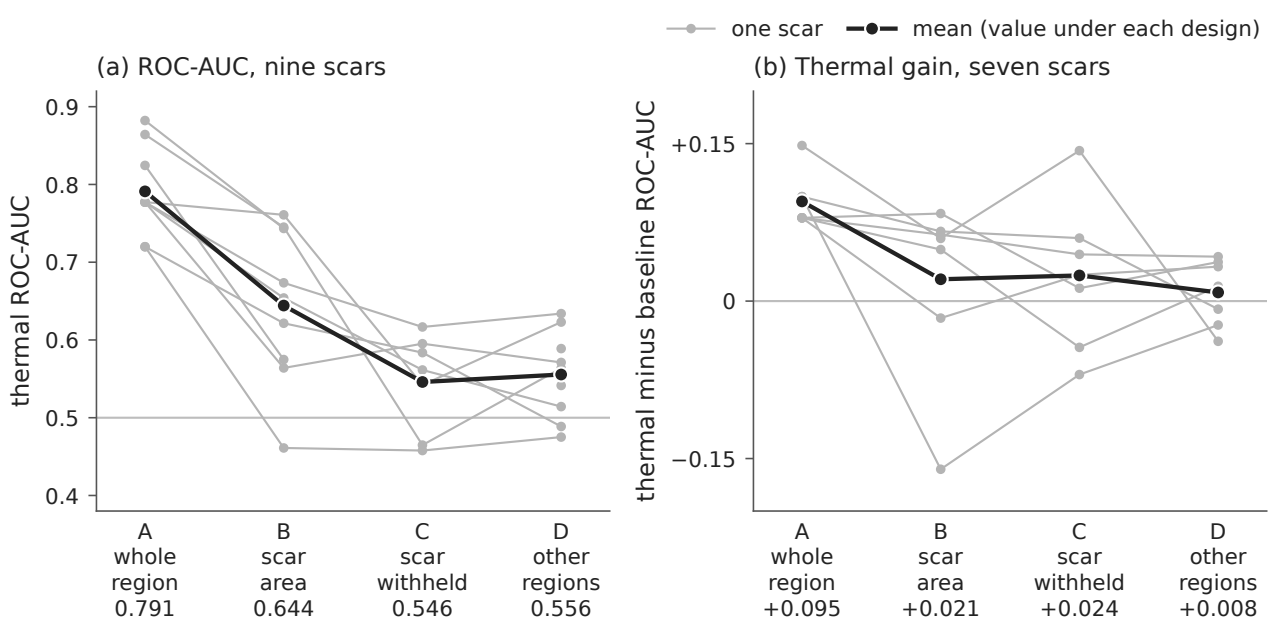
one scar
mean (value under each design)
(a) ROC-AUC, nine scars
thermal ROC-AUC
0.9
0.8
0.7
0.6
0.5
0.4
A
whole
region
0.791
B
scar
area
0.644
C
scar
withheld
0.546
D
other
regions
0.556
(b) Thermal gain, seven scars
thermal minus baseline ROC-AUC
+0.15
0
−0.15
A
whole
region
+0.095
B
scar
area
+0.021
C
scar
withheld
+0.024
D
other
regions
+0.008