

DESCRIPTION #1 First Issue(在DFG1606402上改FPC) 2024-06-19

**有仕中項件品則凹金此贝图**纸

客户确认签名:

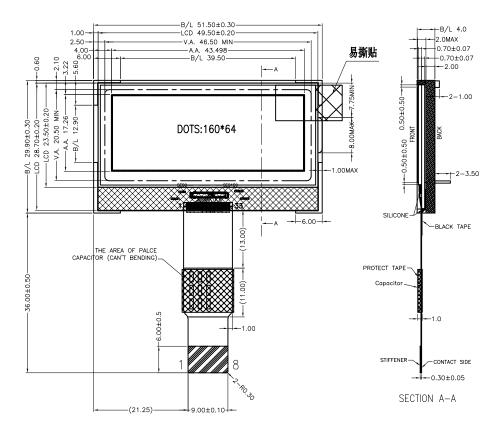

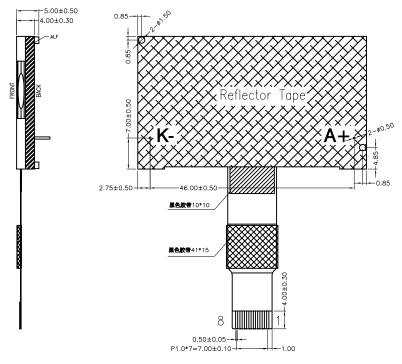

## NOTES:

1. DISPLAY TYPE:

2. OPERATING VOLTAGE:

3. OPERATING TEMPERATURE:

4. STORAGE TEMPERATURE:

5. DRIVE MODE:

6. VIEWING DIRECTION:

7. POLARIZER TYPE:

8. CONNECTOR:

9. CONTROLLER IC: 10. BACKLIGHT:

FSTN

VDD:3.3V,VLCD:11.5V

-20°C~70°C

-30°C~80°C

1/65D,1/9B 6:00


TRANSFLECTIVE, POSITIVE

FPC IST3020

WHITE EDGE LED(X2) If:30mA,Vf:3.3V







2	VSS
3	VDD
4	SI
5	SCL
6	Α0
7	/RES
8	/CS1

SYMBOL

MODULE NO.	FG-1606402-FBWA-B-G-A
---------------	-----------------------

٨	SHEET	1
٦	OF	1
	FILE NA	ME

ф <u>—</u>	UNIT	SIZE	
$\Psi \Box$	mm	A4	

ZE	SCALE	
4	N-T-S	

DESIGNED	CHECKED	APPROVED	FILE NAME
谢小姗 2024-06-19	林烈寅 2024-06-19		Count Dwg