


Captura de código de prueba

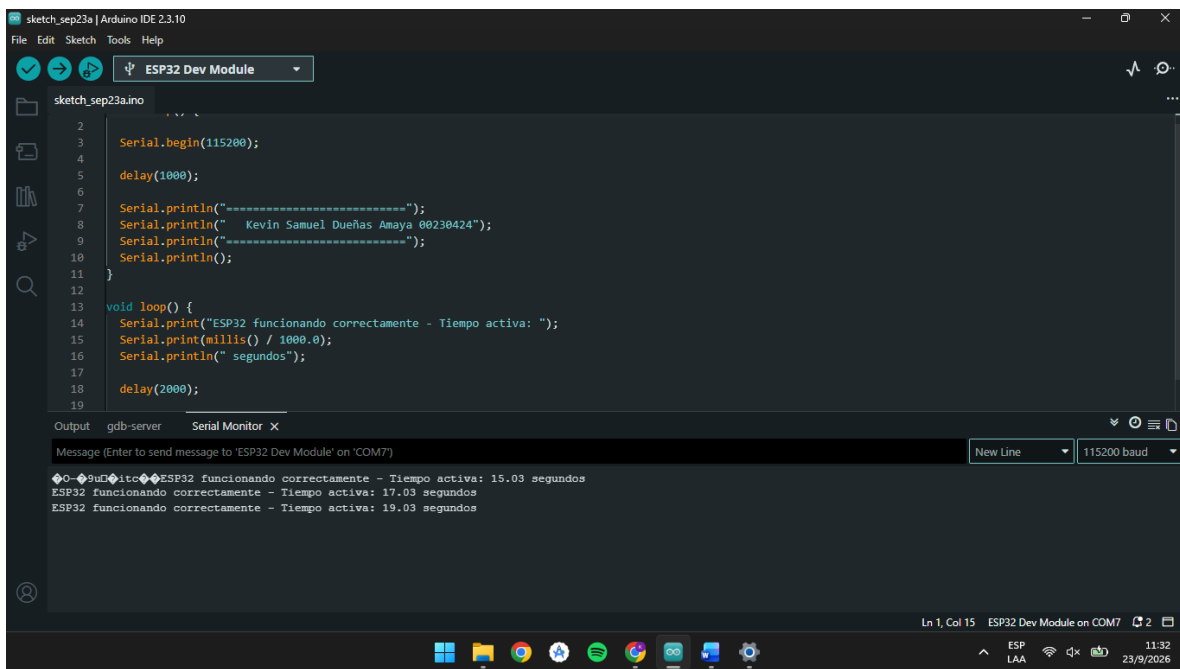


The screenshot shows the Arduino IDE interface with the file 'sketch_sep23a.ino' open. The code is as follows:

```
2  
3 Serial.begin(115200);  
4  
5 delay(1000);  
6  
7 Serial.println("=====");  
8 Serial.println(" Kevin Samuel Dueñas Amaya 00230424");  
9 Serial.println("=====");  
10 Serial.println();  
11 }  
12  
13 void loop() {  
14   Serial.print("ESP32 funcionando correctamente - Tiempo activa: ");  
15   Serial.print(millis() / 1000.0);  
16   Serial.println(" segundos");  
17  
18   delay(2000);  
19 }
```

The Serial Monitor is open, showing the output:

```
Message (Enter to send message to 'ESP32 Dev Module' on 'COM7')  
New Line 115200 baud  
ESP32 funcionando correctamente - Tiempo activa: 15.03 segundos  
ESP32 funcionando correctamente - Tiempo activa: 17.03 segundos  
ESP32 funcionando correctamente - Tiempo activa: 19.03 segundos
```

Sensor+touch

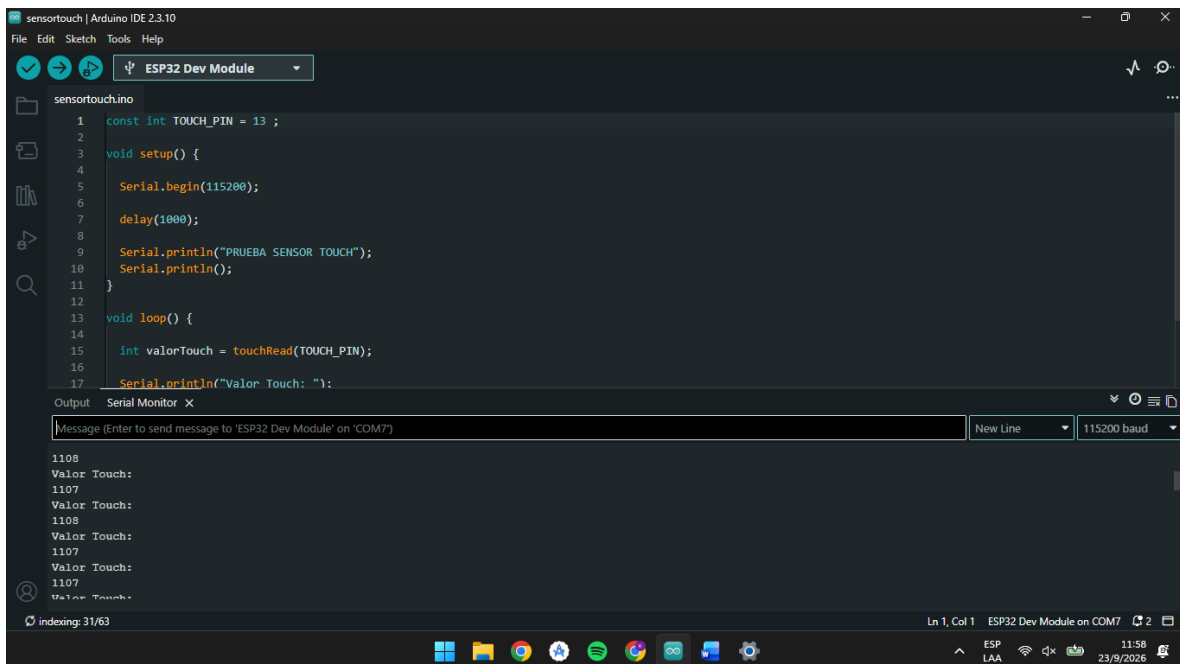

The screenshot shows the Arduino IDE interface with the file 'sensortouch.ino' open. The code is as follows:

```
1 const int TOUCH_PIN = 13 ;  
2  
3 void setup() {  
4  
5   Serial.begin(115200);  
6  
7   delay(1000);  
8  
9   Serial.println("PRUEBA SENSOR TOUCH");  
10  Serial.println();  
11 }  
12  
13 void loop() {  
14  
15   int valorTouch = touchRead(TOUCH_PIN);  
16  
17   Serial.println("Valor Touch: ");
```

The Serial Monitor is open, showing the output:

```
Message (Enter to send message to 'ESP32 Dev Module' on 'COM7')  
New Line 115200 baud  
1108  
Valor Touch:  
1107  
Valor Touch:  
1108  
Valor Touch:  
1107  
Valor Touch:  
1107  
Valor Touch:  
1107
```

Medicion	Valor
Sin tocar	1088
Al tocar	160
Umbral seleccionado	624

Cuenta de adafruit

