


MCE-100 - Electret Mike Capsul

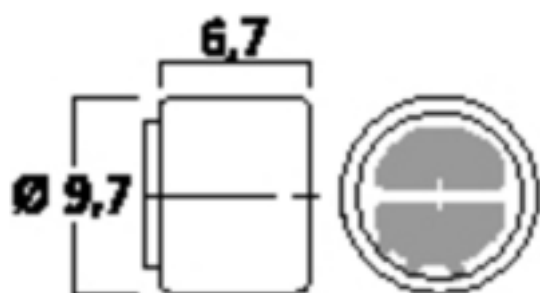

Electret microphone cartridge, (omnidirectional characteristic), subminiature version. PCB mounting, pin spacing 2.5.

Technical data:

Frequency range	: 50-10,000 Hz
Sensitivity	: 5.6 mV/Pa/1 kHz, $R_L=2.2$ k Ohm
Output impedance	: 2 k Ohm
S/N ratio	: ? 34 dB
Coupling capacitor	: 0.1-4.7 μ F
Admiss. ambient temp.	: 0-40 °C
Power supply	: 1.5-10 V DC current /0.5 mA