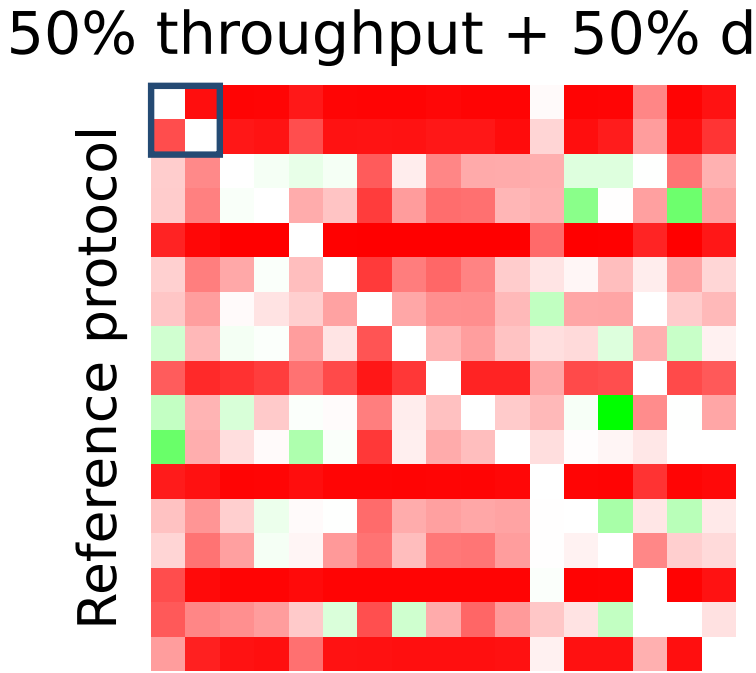
50% throughput + 50% delay
Reference protocol
Target protocol

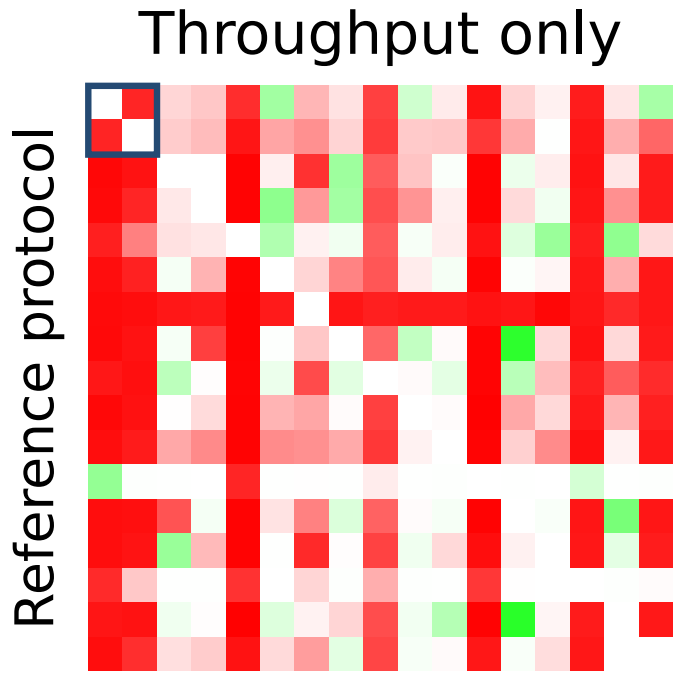
Throughput only
Reference protocol
Target protocol