


- |              |                        |
|--------------|------------------------|
| Ground       | Digital Pin            |
| Power        | Analog Pin             |
| LED          | Other Pin              |
| Internal Pin | Microcontroller's Port |
| SWD Pin      | Default                |

⚠ **MAXIMUM** current per I/O pin is 20mA

⚠ **MAXIMUM** current per +3.3V pin is 50mA

**VIN** 6-20 V input to the board.



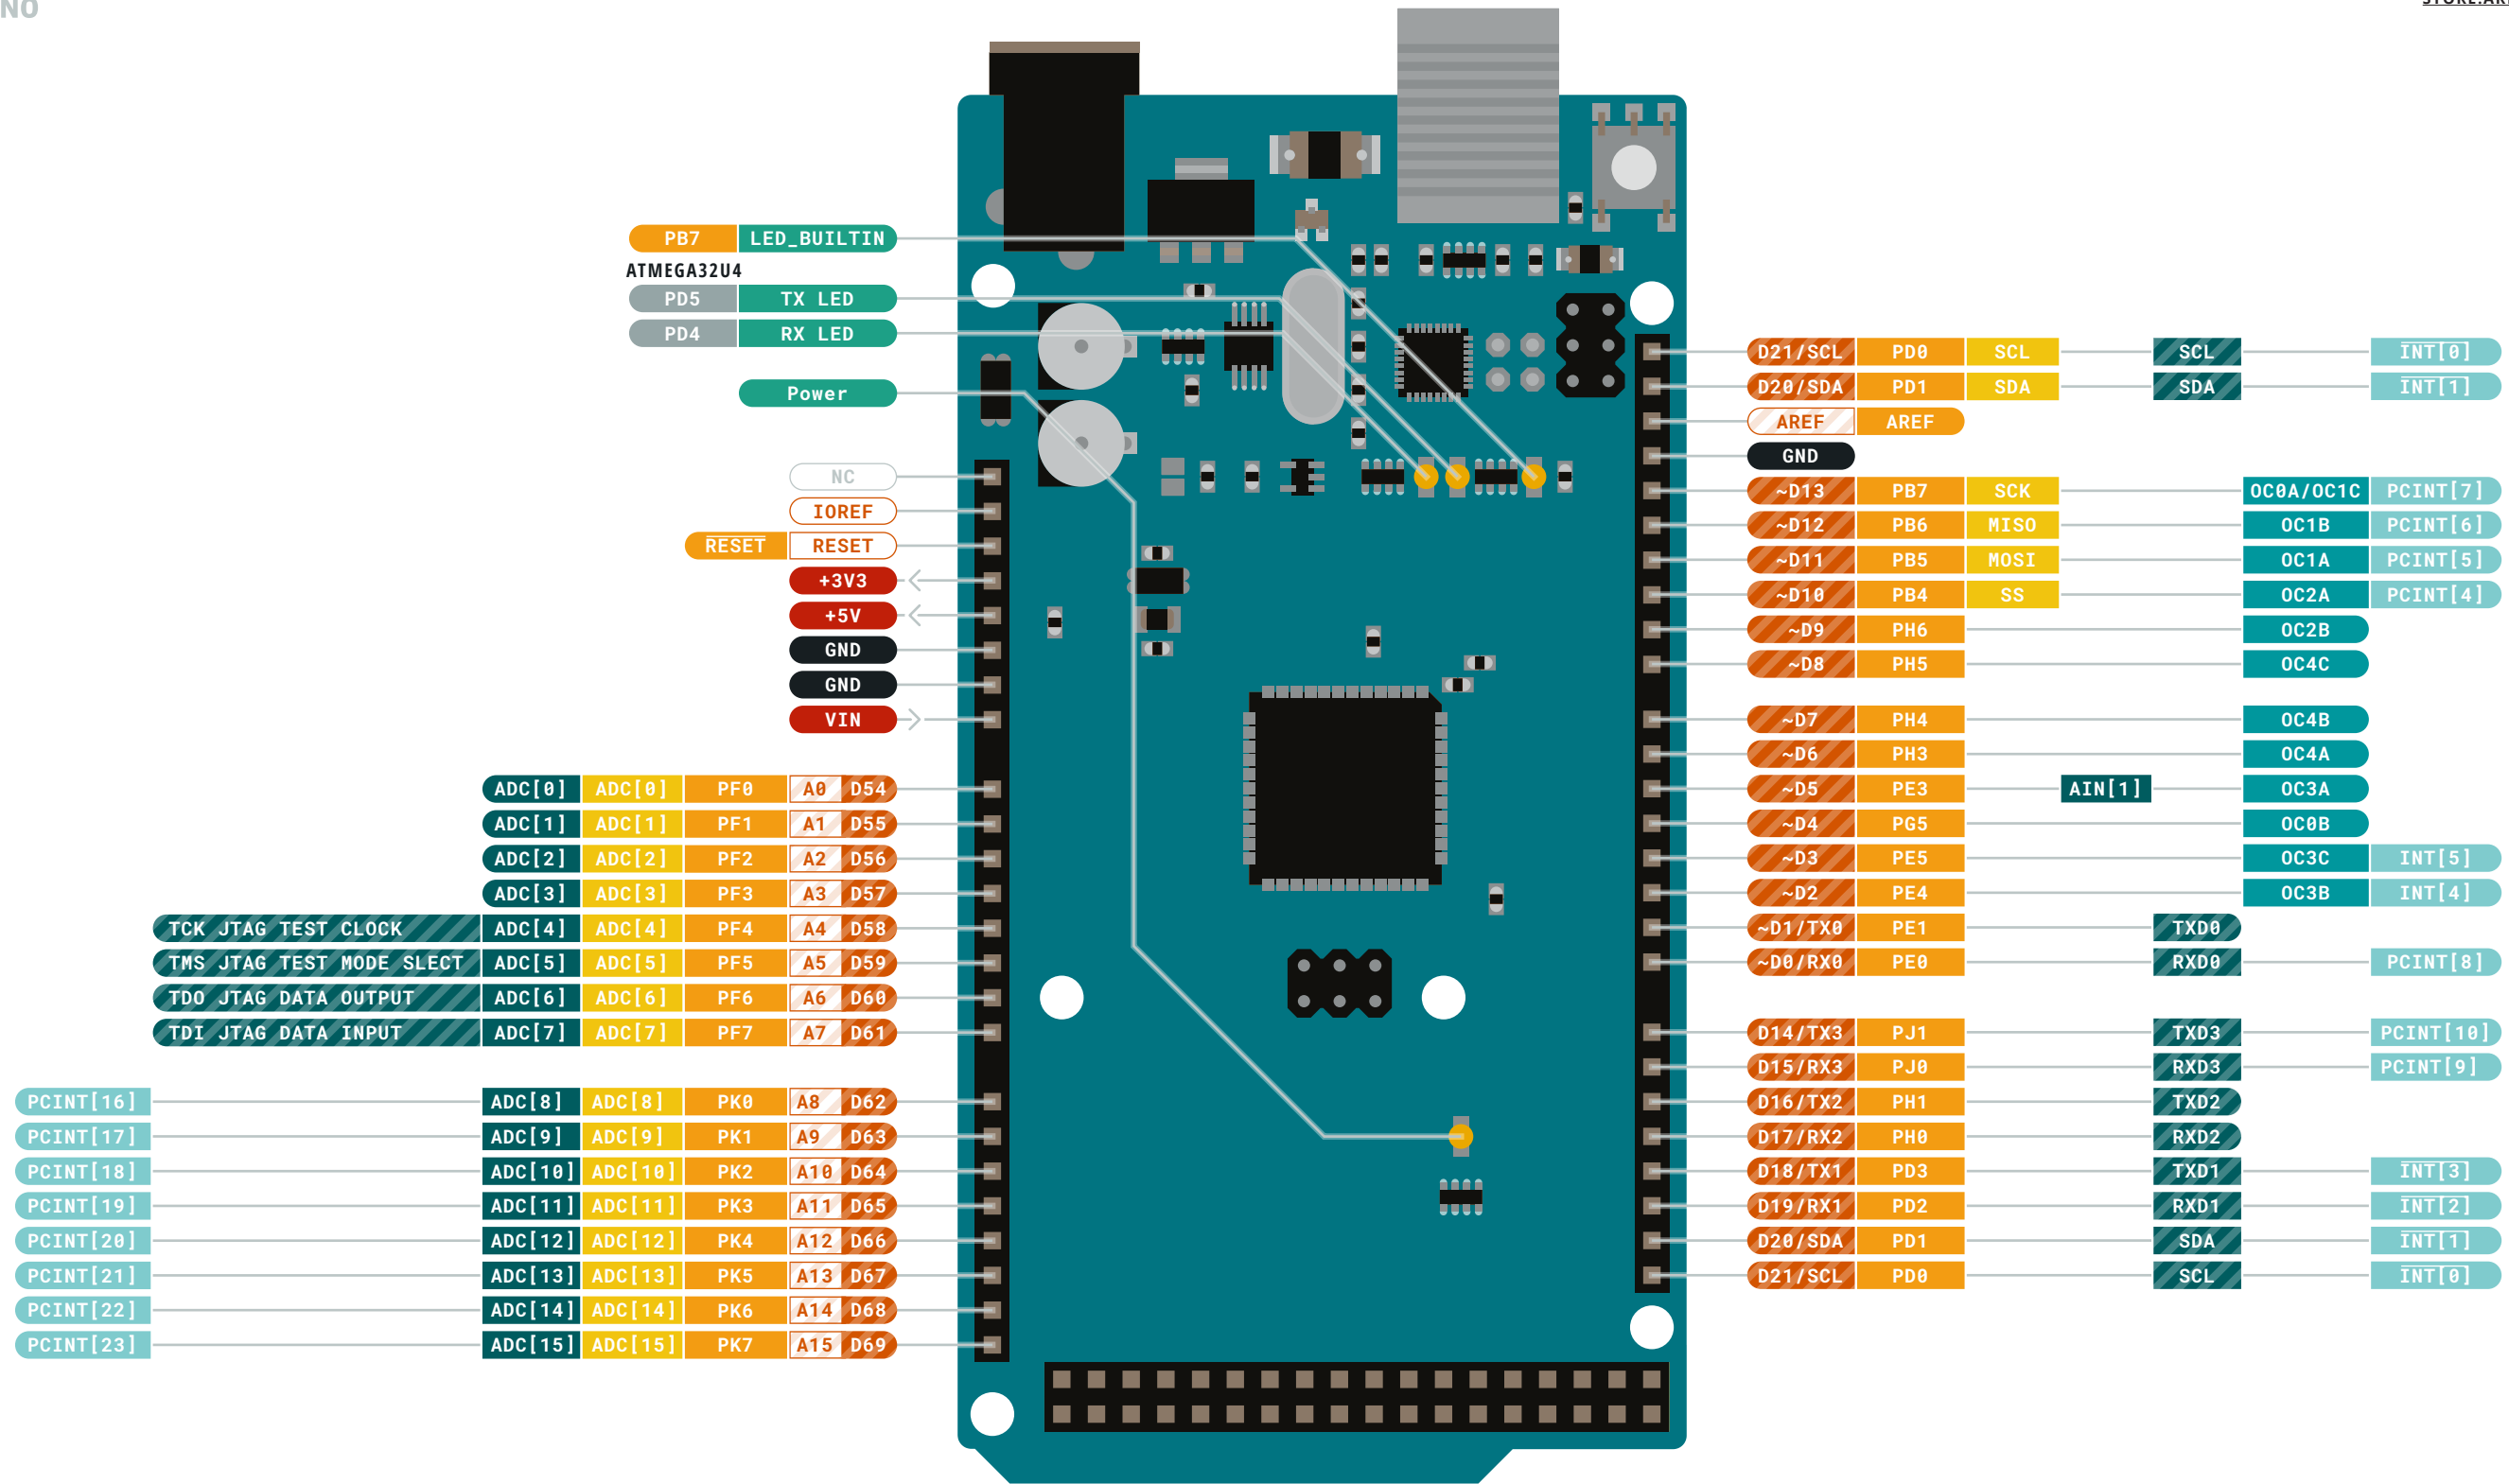


- |              |                        |               |
|--------------|------------------------|---------------|
| Ground       | Digital Pin            | Analog        |
| Power        | Analog Pin             | Communication |
| LED          | Other Pin              | Timer         |
| Internal Pin | Microcontroller's Port | Interrupt     |
| SWD Pin      | Default                | Sercom        |

**MAXIMUM** current per I/O pin is 20mA


**MAXIMUM** current per +3.3V pin is 50mA

**VIN** 6-20 V input to the board.





# Digital pins D22-D53

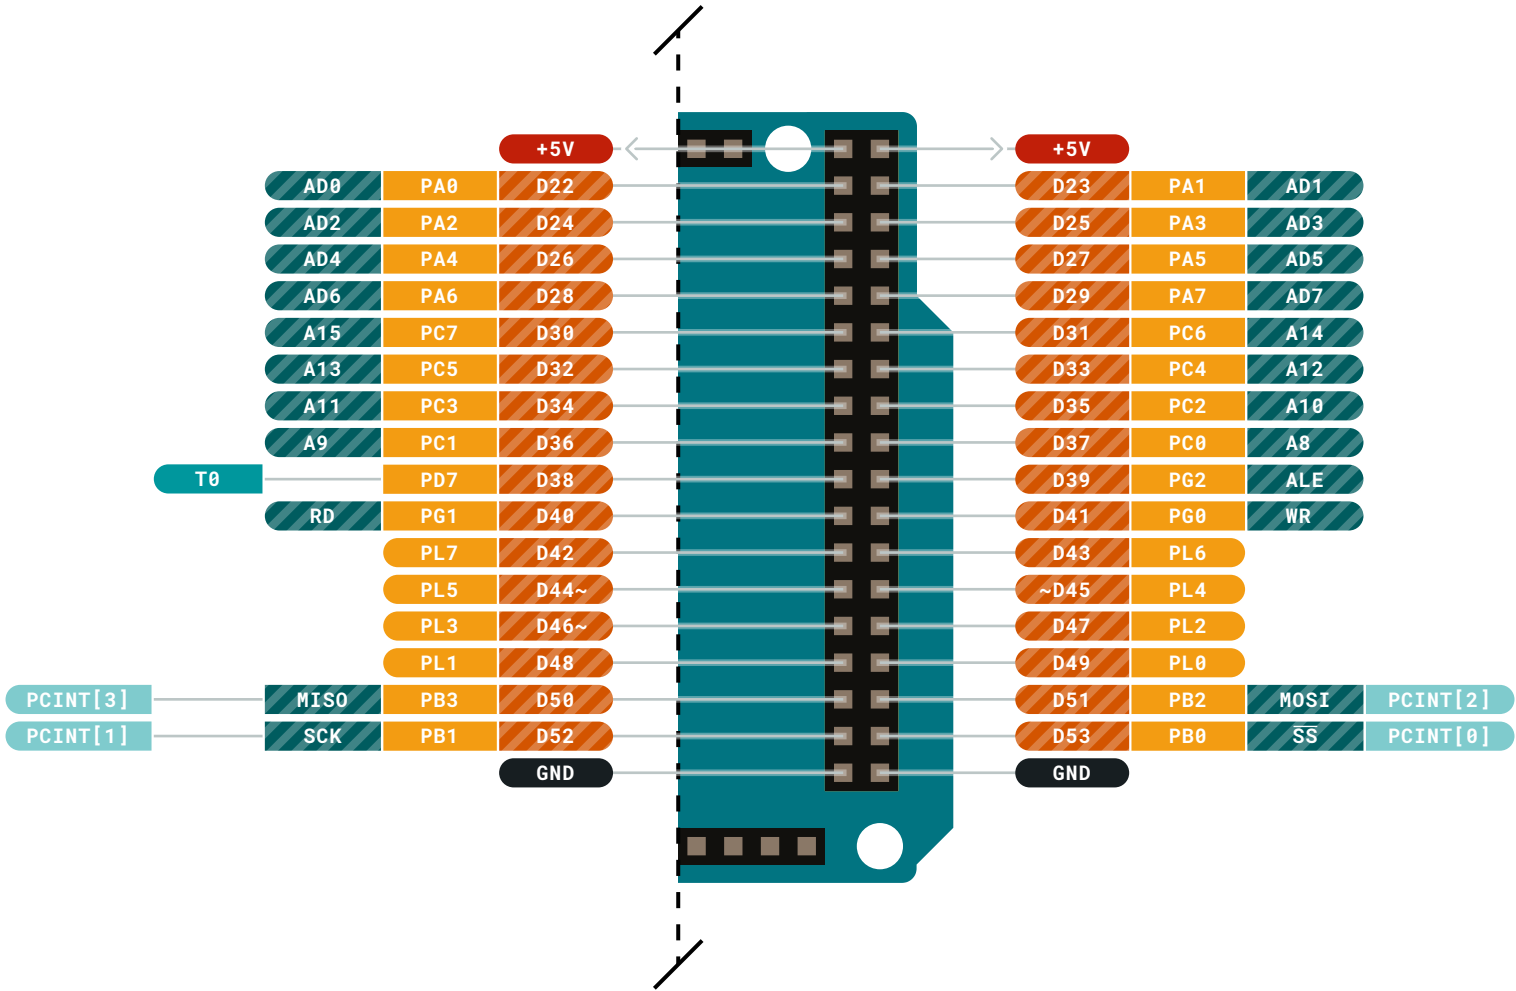

- Ground
- Power
- LED
- Internal Pin
- SWD Pin
- Digital Pin
- Analog Pin
- Other Pin
- Microcontroller's Port
- Default
- Analog
- Communication
- Timer
- Interrupt
- Sercom


**MAXIMUM** current per I/O pin is 20mA

**MAXIMUM** current per +3.3V pin is 50mA

**VIN** 6-20 V input to the board.



This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.

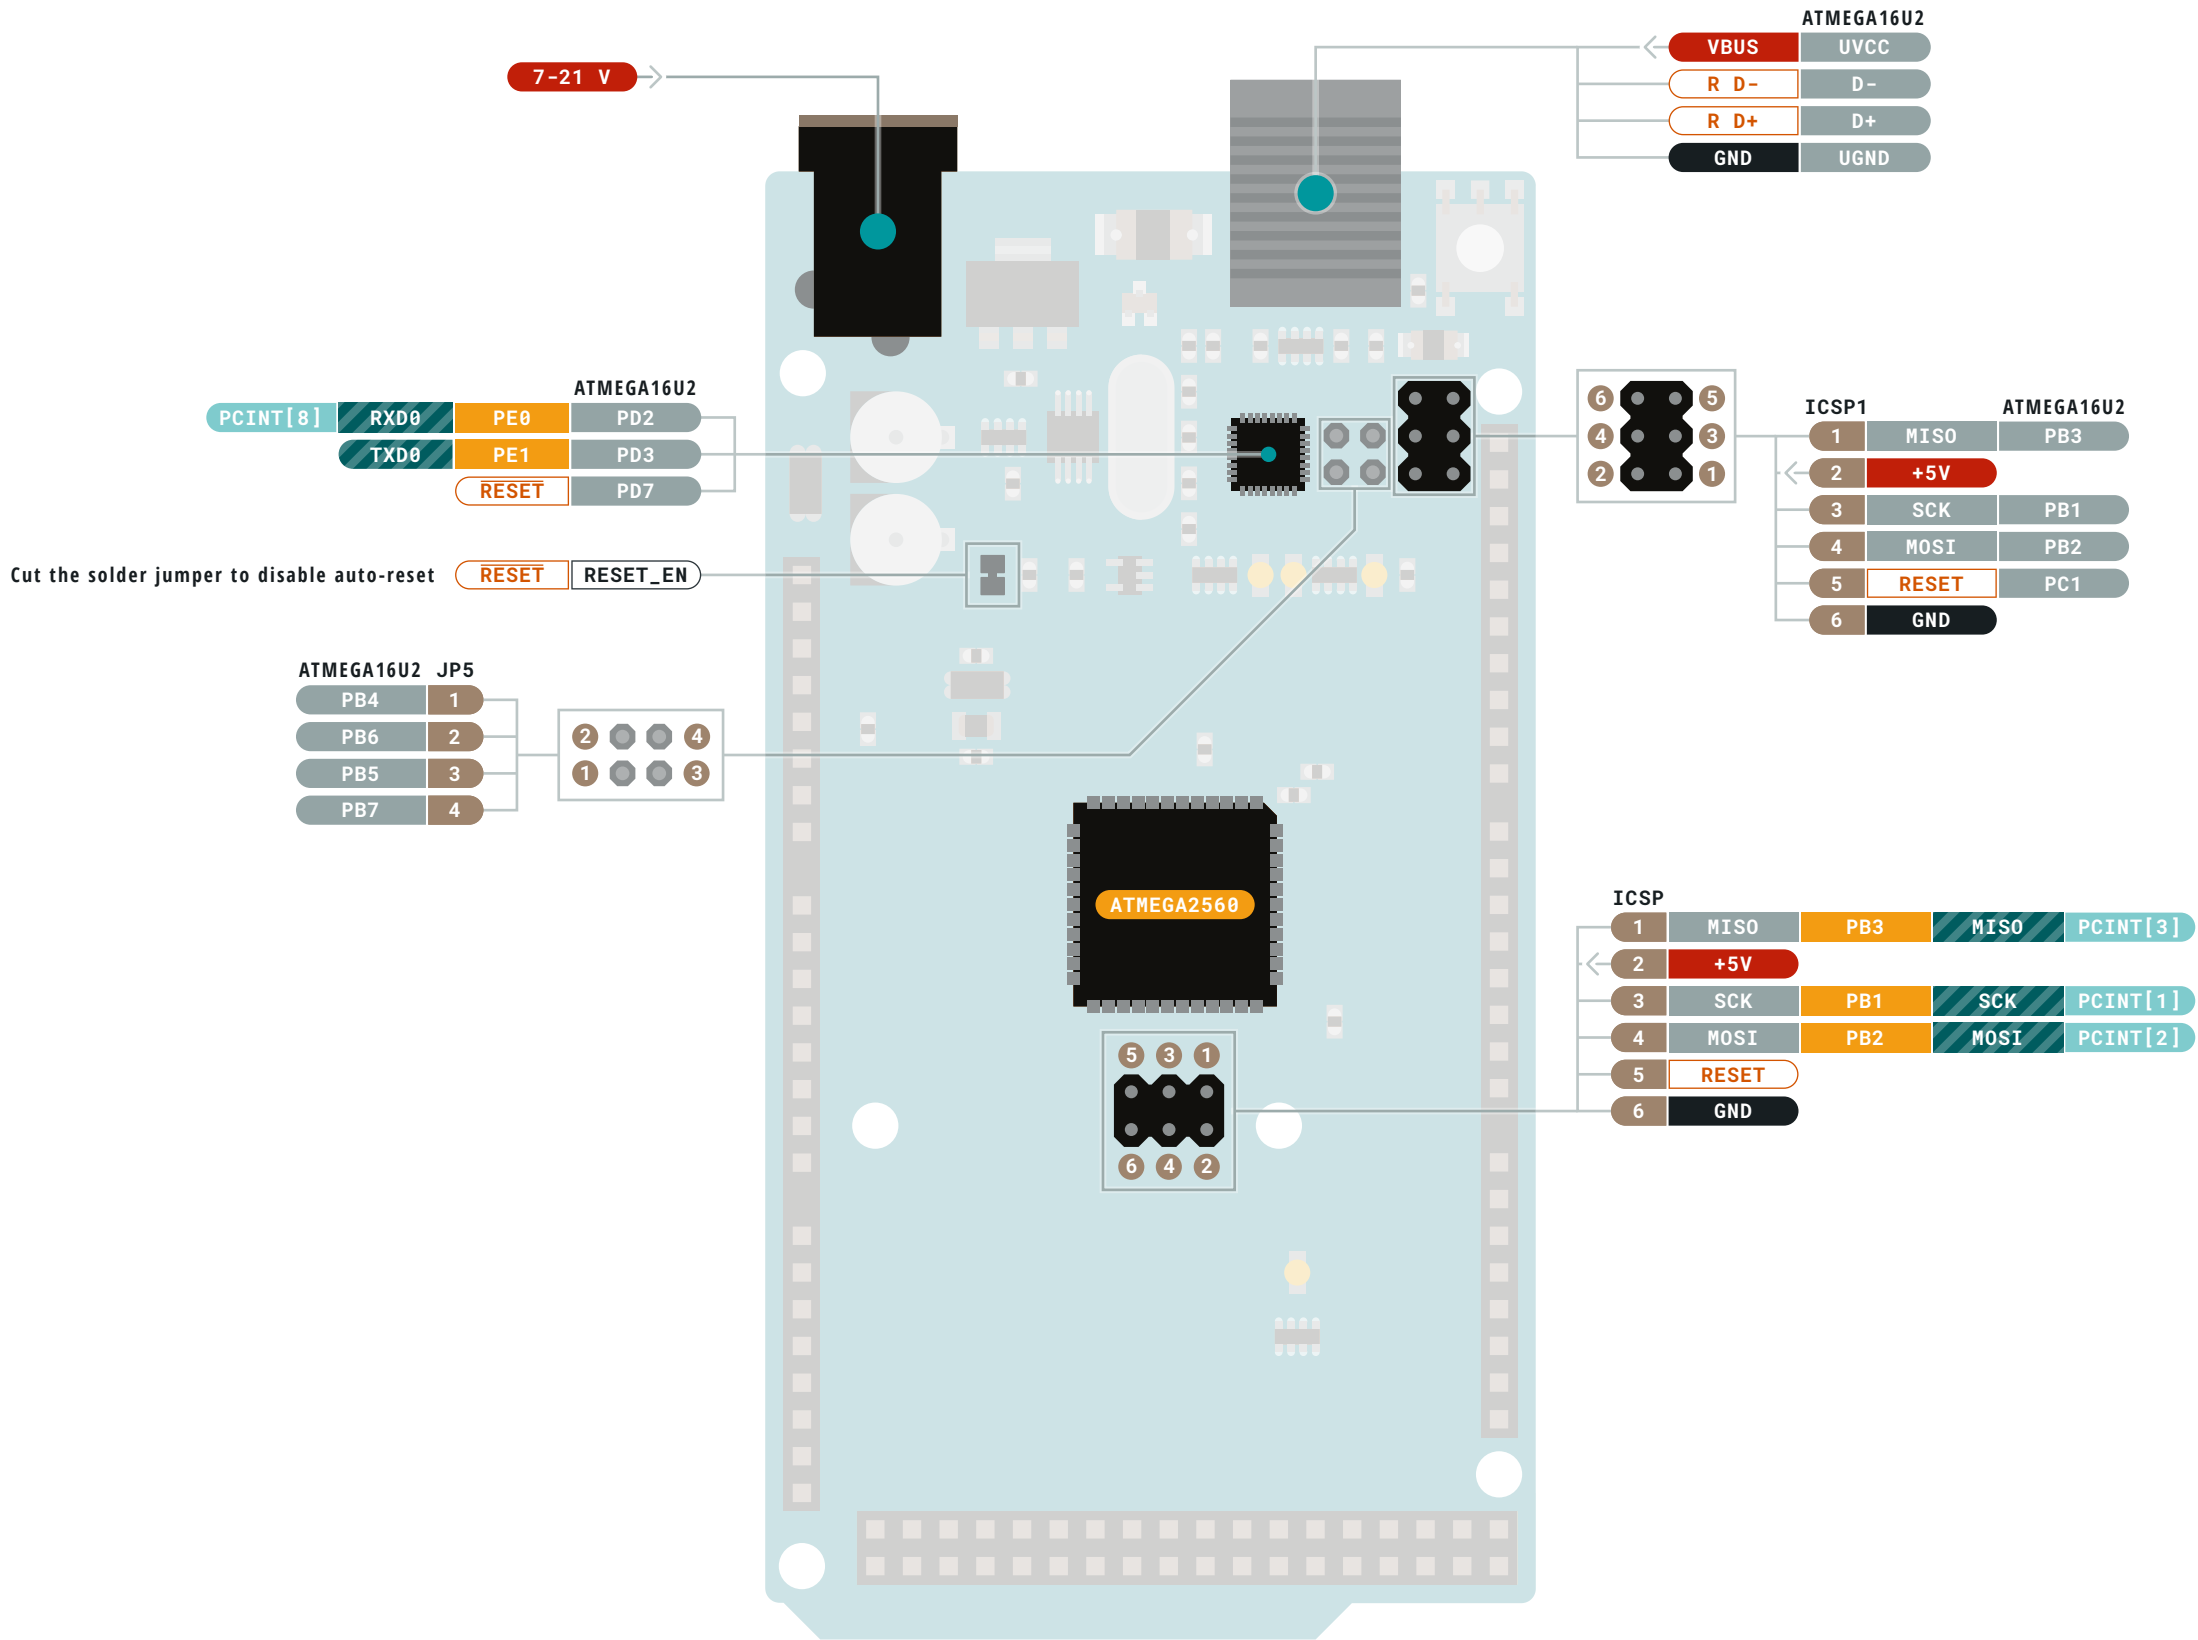

- |              |                        |               |
|--------------|------------------------|---------------|
| Ground       | Digital Pin            | Analog        |
| Power        | Analog Pin             | Communication |
| LED          | Other Pin              | Timer         |
| Internal Pin | Microcontroller's Port | Interrupt     |
| SWD Pin      | Default                | Sercom        |

⚠ **MAXIMUM** current per I/O pin is 20mA

⚠ **MAXIMUM** current per +3.3V pin is 50mA

**VIN** 6-20 V input to the board.



This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.