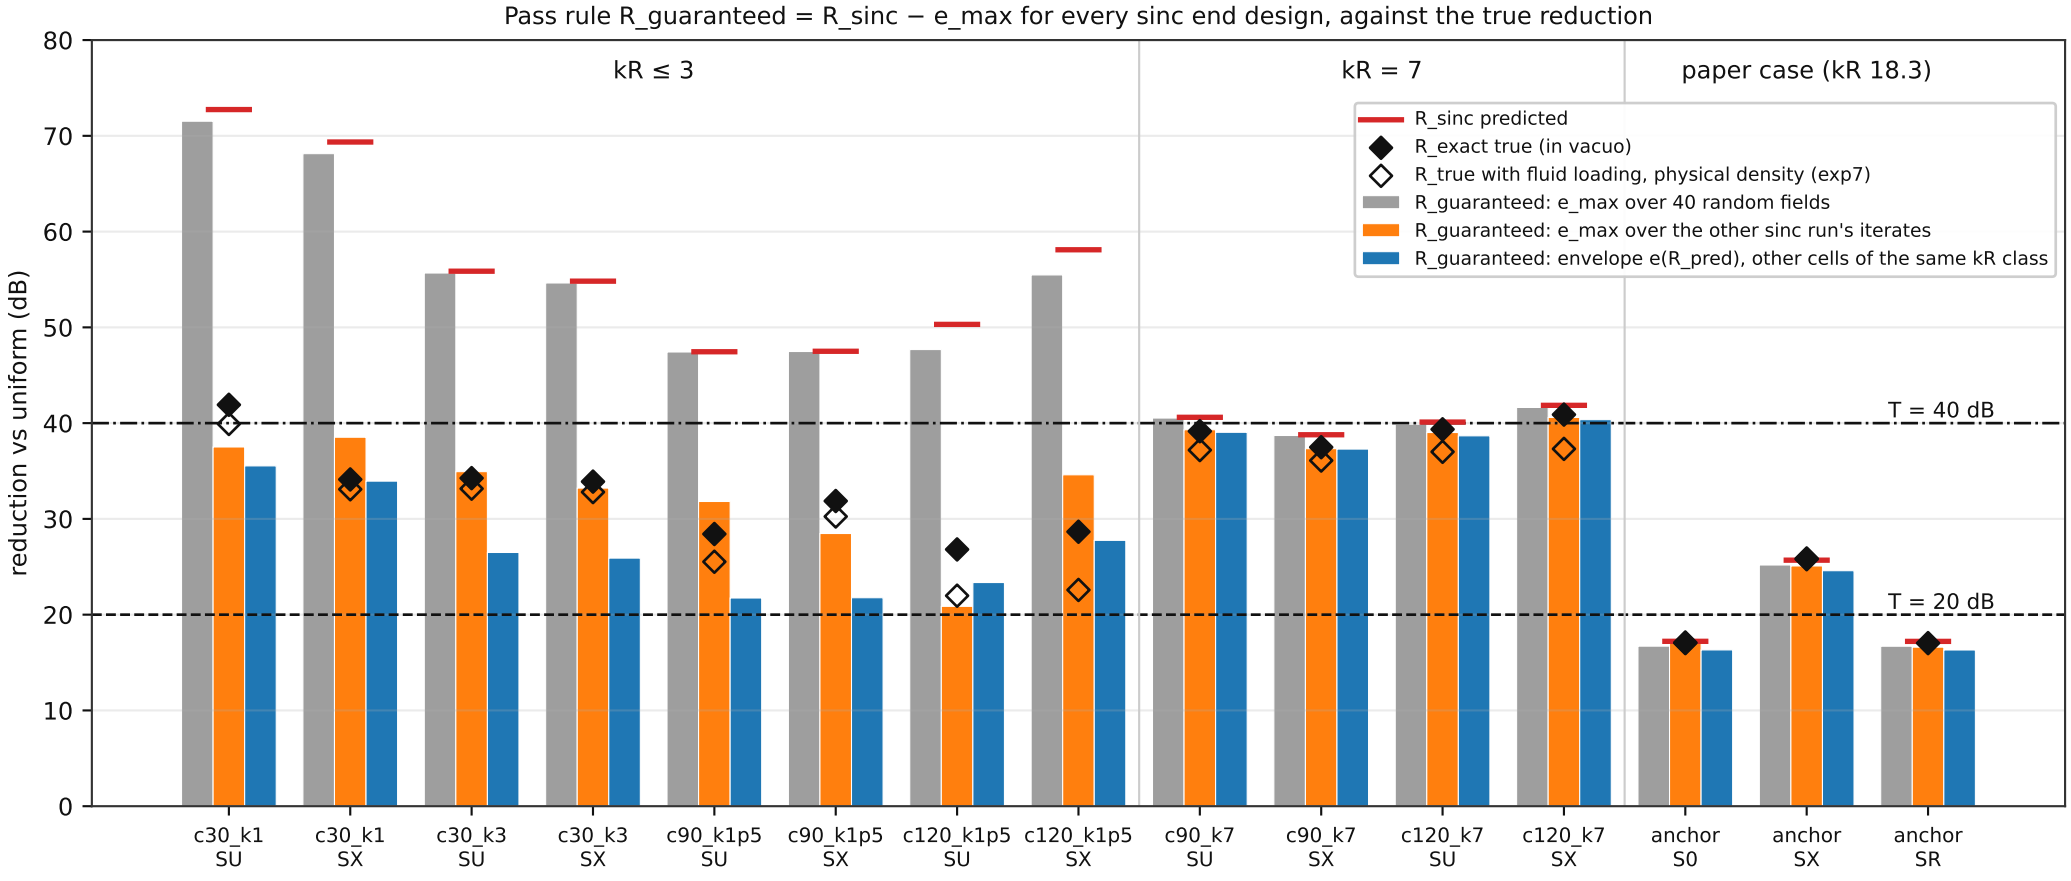
Pass rule R_guaranteed = R_sinc − e_max for every sinc end design, against the true reduction
kR ≤ 3
kR = 7
paper case (kR 18.3)
R_sinc predicted
R_exact true (in vacuo)
R_true with fluid loading, physical density (exp7)
R_guaranteed: e_max over 40 random fields
R_guaranteed: e_max over the other sinc run's iterates
R_guaranteed: envelope e(R_pred), other cells of the same kR class
T = 40 dB
T = 20 dB
reduction vs uniform (dB)
0
10
20
30
40
50
60
70
80
c30_k1 SU
c30_k1 SX
c30_k3 SU
c30_k3 SX
c90_k1p5 SU
c90_k1p5 SX
c120_k1p5 SU
c120_k1p5 SX
c90_k7 SU
c90_k7 SX
c120_k7 SU
c120_k7 SX
anchor S0
anchor SX
anchor SR