


# Real-Time Clock (RTC)

1.60

## Features

- Multiple alarm options
- Multiple overflow options
- Daylight Savings Time (DST) option



## General Description

The Real-Time Clock (RTC) component provides accurate time and date information for the system. The time and date are updated every second based on a one pulse per second interrupt from a 32.768-kHz crystal. Clock accuracy is based on the crystal provided and is typically 20 ppm.

The RTC keeps track of the second, minute, hour, day of the week, day of the month, day of the year, month, and year. The day of the week is automatically calculated from the day, month, and year. Daylight savings time may be optionally enabled and supports any start and end date, as well as a programmable saving time. The start and end dates may be absolute like 24 March or relative like the second Sunday in May.

The Alarm provides match detection for a second, minute, hour, day of week, day of month, day of year, month, and year. A mask selects what combination of time and date information will be used to generate the alarm. The alarm flexibility supports periodic alarms such as every twenty third minute after the hour, or a single alarm such as 4:52 a.m. on September 28, 2043.

User code stubs are provided for periodic code execution based on each of the primary time intervals. Timer intervals are provided at one second, one minute, one hour, one day, one week, one month, and one year.

## When to Use an RTC Component


Use the RTC component when the system requires the current time or date. You can also use the RTC when you do not need the current time and date but you need accurate timing of events with one-second resolution.

## Input/Output Connections

The RTC component does not have input or output connections.

## Component Parameters

Drag an RTC component onto your design and double-click it to open the **Configure** dialog.

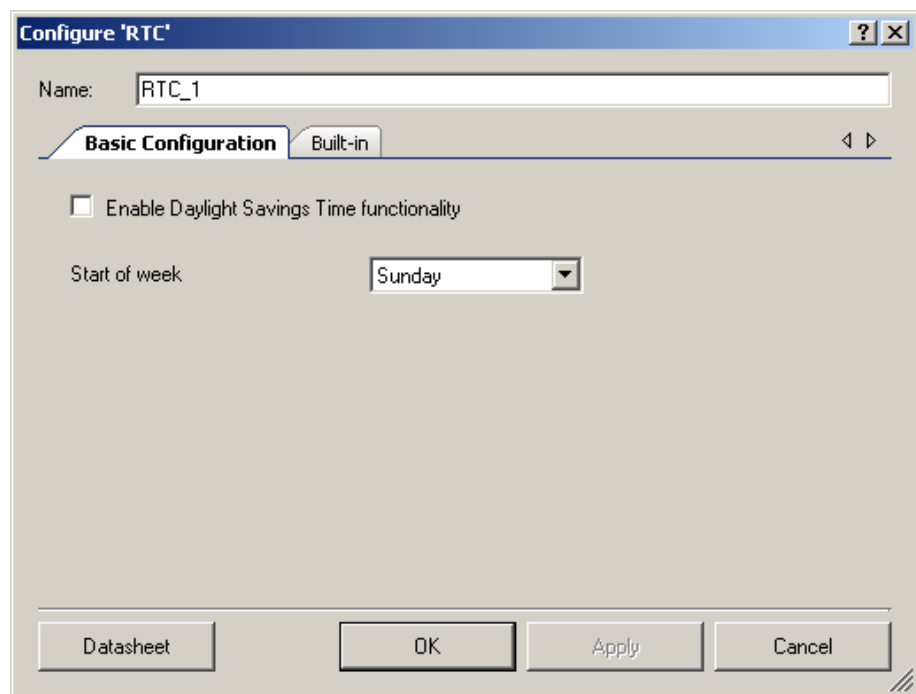

The RTC component contains the following options:

### Enable Daylight Savings Time functionality

This parameter allows you to choose whether the daylight savings time functionality is enabled in the RTC component. The default value is cleared (false).

### Start of week

The **Start of week** parameter allows you to choose start day of the week. Options include: **Sunday** (default), **Monday**, **Tuesday**, **Wednesday**, **Thursday**, **Friday**, and **Saturday**.

## Clock Selection

You should provide a 32.768-kHz clock from an external crystal oscillator. The accuracy of this component is defined by the accuracy of the connected external clock source. Refer to the Clock Editor section of the PSoC Creator Help for information about how to connect and configure the built-in XTAL\_32KHZ clock in your design.

## Resources

Resolution	Digital Blocks					API Memory (Bytes)		Pins (per External I/O)
	Datapaths	Macro cells	Status Registers	Control Registers	Counter7	Flash	RAM	
RTC fixed HW *	N/A	N/A	N/A	N/A	N/A	2738	25	N/A

\* One-pulse-per-second Interrupt from Power Management used

## Application Programming Interface

Application Programming Interface (API) routines allow you to configure the component using software. The following table lists and describes the interface to each function. The subsequent sections cover each function in more detail.

By default, PSoC Creator assigns the instance name “RTC\_1” to the first instance of a component in a given design. You can rename it to any unique value that follows the syntactic rules for identifiers. The instance name becomes the prefix of every global function name, variable, and constant symbol. For readability, the instance name used in the following table is “RTC.”

You should disable the component’s interrupts while calling functions that read or modify global variables.

Refer to the [Registers](#) section of this datasheet for more information, as needed.

Function	Description
RTC_Start()	Enables the RTC component
RTC_Stop()	Stops RTC component operation
RTC_EnableInt()	Enables interrupts of RTC component
RTC_DisableInt()	Disables interrupts of the RTC component; time and date stop running
RTC_WriteTime()	Writes time and date values as current time and date
RTC_ReadTime()	Reads the current time and date
RTC_WriteSecond()	Writes Sec software register value
RTC_WriteMinute()	Writes Min software register value
RTC_WriteHour()	Writes Hour software register value
RTC_WriteDayOfMonth()	Writes DayOfMonth software register value
RTC_WriteMonth()	Writes Month software register value
RTC_WriteYear()	Writes Year software register value
RTC_WriteAlarmSecond()	Writes Alarm Sec software register value



Function	Description
RTC_WriteAlarmMinute()	Writes Alarm Min software register value
RTC_WriteAlarmHour()	Writes Alarm Hour software register value
RTC_WriteAlarmDayOfMonth()	Writes Alarm DayOfMonth software register value
RTC_WriteAlarmMonth()	Writes Alarm Month software register value
RTC_WriteAlarmYear()	Writes Alarm Year software register value
RTC_WriteAlarmDayOfWeek()	Writes Alarm DayOfWeek software register value
RTC_WriteAlarmDayOfYear()	Writes Alarm DayOfYear software register value
RTC_ReadSecond()	Reads Sec software register value
RTC_ReadMinute()	Reads Min software register value
RTC_ReadHour()	Reads Min software register value
RTC_ReadDayOfMonth()	Reads DayOfMonth software register value
RTC_ReadMonth()	Reads Month software register value
RTC_ReadYear()	Reads Year software register value
RTC_ReadAlarmSecond()	Reads Alarm Sec software register value
RTC_ReadAlarmMinute()	Reads Alarm Min software register value
RTC_ReadAlarmHour()	Reads Alarm Hour software register value
RTC_ReadAlarmDayOfMonth()	Reads Alarm DayOfMonth software register value
RTC_ReadAlarmMonth()	Reads Alarm Month software register value
RTC_ReadAlarmYear()	Reads Alarm Year software register value
RTC_ReadAlarmDayOfWeek()	Reads Alarm DayOfWeek software register value
RTC_ReadAlarmDayOfYear()	Reads Alarm DayOfYear software register value
RTC_WriteAlarmMask()	Writes the Alarm Mask software register with one bit per time/date entry
RTC_WriteIntervalMask()	Configures what interval handlers will be called from the RTC ISR
RTC_ReadStatus()	Reads the Status software register, which has flags for DST (DST), Leap Year (LY), AM/PM (AM_PM), and Alarm active (AA)
RTC_WriteDSTMode()	Writes the DST Mode software register
RTC_WriteDSTStartHour()	Writes the DST Start Hour software register
RTC_WriteDSTStartDayOfMonth()	Writes the DST Start DayOfMonth software register
RTC_WriteDSTStartMonth()	Writes the DST Start Month software register
RTC_WriteDSTStartDayOfWeek()	Writes the DST Start DayOfWeek software register
RTC_WriteDSTStartWeek()	Writes the DST Start Week software register

Function	Description
RTC_WriteDSTStopHour()	Writes the DST Stop Hour software register
RTC_WriteDSTStopDayOfMonth()	Writes the DST Stop DayOfMonth software register
RTC_WriteDSTStopMonth()	Writes the DST Stop Month software register
RTC_WriteDSTStopDayOfWeek()	Writes the DST Stop DayOfWeek software register
RTC_WriteDSTStopWeek()	Writes the DST Stop Week software register
RTC_WriteDSTOffset()	Writes the DST Offset register
RTC_Init()	Initializes and restores default configuration provided with the customizer
RTC_Enable()	Enables the interrupts, one pulse per second, and interrupt generation on OPPS event

## Global Variables

Variable	Description
RTC_initVar	Indicates whether the RTC has been initialized. The variable is initialized to 0 and set to 1 the first time RTC_Start() is called. This allows the component to restart without reinitialization after the first call to the RTC_Start() routine.  If reinitialization of the component is required, then the RTC_Init() function can be called before the RTC_Start() or RTC_Enable() function.
RTC_currentTimeDate	The current time and date values are stored in this variable.
RTC_statusDateTime	This variable has following flags: DST, Leap Year, AM/PM, and Active Alarm statuses.
RTC_intervalCfgMask	This variable is used to define what interrupt stub should be executed.
RTC_alarmCfgTimeDate	The alarm time and date values are stored in this variable..
RTC_alarmCurStatus	This variable is used to indicate current active alarm: seconds alarm is active, minutes alarm is active, and so on.
RTC_alarmCfgMask	This variable is used to mask alarm events: mask seconds alarm, mask minutes alarm, and so on.
RTC_dstModeType	This variable stores DST mode type's value: '0' – fixed and '1' – relative.
RTC_dstTimeDateStart	The values for the time and date of the DST start.
RTC_dstTimeDateStop	The values for the time and date of the DST stop.
RTC_dstStartStatus	The DST start status.
RTC_dstStopStatus	The DST stop status.
RTC_dstOffsetMin	The DST offset value in minutes.



**void RTC\_Start(void)**

- Description:** Enables the RTC component. This function configures the counter, sets up interrupts, does all required calculation, and starts the counter.
- Parameters:** None
- Return Value:** None
- Side Effects:** Enables the one pulse per second and central time wheel signals to wake up the device from low-power modes (Sleep and Alternate Active) and leaves them enabled.

**void RTC\_Stop(void)**

- Description:** Stops RTC component operation.
- Parameters:** None
- Return Value:** None
- Side Effects:** Leaves the one pulse per second and the central time wheel signals enabled, which wakes up the device from low-power modes (Sleep and Alternate Active).

**void RTC\_EnableInt(void)**

- Description:** Enables interrupts from the RTC component.
- Parameters:** None
- Return Value:** None
- Side Effects:** None

**void RTC\_DisableInt(void)**

- Description:** Disables interrupts from the RTC component. Time and date stop running.
- Parameters:** None
- Return Value:** None
- Side Effects:** None

**RTC\_TIME\_DATE\* timeDate RTC\_ReadTime(void)**

- Description:** Reads the current time and date.
- Parameters:** None
- Return Value:** Pointer to the RTC\_TIME\_DATE..
- Side Effects:** None



**void RTC\_WriteTime(RTC\_TIME\_DATE \* timeDate)**

- Description:** Writes the time and date values as current time and date. Only passes the Second, Minute, Hour, Month, Day of Month, and Year.
- Parameters:** timeDate: Pointer to the RTC\_TIME\_DATE global structure where new values of time and date are stored
- Return Value:** None
- Side Effects:** The RTC component's interrupt should be disabled before calling this function and enabled afterwards to avoid RTC counter increment in the middle of the time and date writing.

**void RTC\_WriteSecond(uint8 second)**

- Description:** Writes the Sec software register value.
- Parameters:** second: Seconds value
- Return Value:** None
- Side Effects:** None

**void RTC\_WriteMinute(uint8 minute)**

- Description:** Writes the Min software register value.
- Parameters:** minute: Minutes value
- Return Value:** None
- Side Effects:** None

**void RTC\_WriteHour(uint8 hour)**

- Description:** Writes the Hour software register value.
- Parameters:** hour: Hours value
- Return Value:** None
- Side Effects:** None



**void RTC\_WriteDayOfMonth(uint8 dayOfMonth)**

**Description:** Writes the DayOfMonth software register value.

**Parameters:** dayOfMonth: DayOfMonth value

**Return Value:** None

**Side Effects:** None

**void RTC\_WriteMonth(uint8 month)**

**Description:** Writes the Month software register value.

**Parameters:** month: Month value

**Return Value:** None

**Side Effects:** None

**void RTC\_WriteYear(uint16 year)**

**Description:** Writes the Year software register value.

**Parameters:** year: Years value

**Return Value:** None

**Side Effects:** None

**void RTC\_WriteAlarmSecond(uint8 second)**

**Description:** Writes the Alarm Sec software register value.

**Parameters:** second: Alarm Seconds value

**Return Value:** None

**Side Effects:** None

**void RTC\_WriteAlarmMinute(uint8 minute)**

**Description:** Writes the Alarm Min software register value.

**Parameters:** minute: Alarm Minutes value

**Return Value:** None

**Side Effects:** None



**void RTC\_WriteAlarmHour(uint8 hour)**

**Description:** Writes the Alarm Hour software register value.

**Parameters:** hour: Alarm Hours value

**Return Value:** None

**Side Effects:** None

**void RTC\_WriteAlarmDayOfMonth(uint8 dayOfMonth)**

**Description:** Writes the Alarm DayOfMonth software register value.

**Parameters:** dayOfMonth: Alarm Day Of Month value

**Return Value:** None

**Side Effects:** None

**void RTC\_WriteAlarmMonth(uint8 month)**

**Description:** Writes the Alarm Month software register value.

**Parameters:** month: Alarm Months value

**Return Value:** None

**Side Effects:** None

**void RTC\_WriteAlarmYear(uint16 year)**

**Description:** Writes the Alarm Year software register value.

**Parameters:** year: Alarm Years value

**Return Value:** None

**Side Effects:** None

**void RTC\_WriteAlarmDayOfWeek(uint8 dayOfWeek)**

**Description:** Writes the Alarm DayOfWeek software register value.

**Parameters:** dayOfWeek: Alarm Day Of Week value

**Return Value:** None

**Side Effects:** None



**void RTC\_WriteAlarmDayOfYear(uint16 dayOfYear)**

**Description:** Writes the Alarm DayOfYear software register value.

**Parameters:** dayOfYear: Alarm Day Of Year value

**Return Value:** None

**Side Effects:** None

**uint8 RTC\_ReadSecond(void)**

**Description:** Reads the Sec software register value.

**Parameters:** None

**Return Value:** None

**Side Effects:** None

**uint8 RTC\_ReadMinute(void)**

**Description:** Reads the Min software register value.

**Parameters:** None

**Return Value:** Returns the current minute's value.

**Side Effects:** None

**uint8 RTC\_ReadHour(void)**

**Description:** Reads the Min software register value.

**Parameters:** None

**Return Value:** Returns the current hour's value.

**Side Effects:** None

**uint8 RTC\_ReadDayOfMonth(void)**

**Description:** Reads the DayOfMonth software register value.

**Parameters:** None

**Return Value:** Returns the current day of month's value.

**Side Effects:** None



### uint8 RTC\_ReadMonth(void)

**Description:** This function reads the Month software register value.

**Parameters:** None

**Return Value:** Returns the current month's value.

**Side Effects:** None

### uint16 RTC\_ReadYear(void)

**Description:** Reads the Year software register value.

**Parameters:** None

**Return Value:** Returns the current year's value.

**Side Effects:** None

### uint8 RTC\_ReadAlarmSecond(void)

**Description:** Reads the Alarm Sec software register value.

**Parameters:** None

**Return Value:** Returns the current second's alarm value.

**Side Effects:** None

### uint8 RTC\_ReadAlarmMinute(void)

**Description:** Reads the Alarm Min software register value.

**Parameters:** None

**Return Value:** Returns the current minute's alarm value.

**Side Effects:** None

### uint8 RTC\_ReadAlarmHour(void)

**Description:** Reads the Alarm Hour software register value.

**Parameters:** None

**Return Value:** Returns the current hour's alarm value is returned

**Side Effects:** None



**uint8 RTC\_ReadAlarmDayOfMonth(void)**

**Description:** Reads the Alarm DayOfMonth software register value.

**Parameters:** None

**Return Value:** Returns the current day of month's alarm value.

**Side Effects:** None

**uint8 RTC\_ReadAlarmMonth(void)**

**Description:** Reads the Alarm Month software register value.

**Parameters:** None

**Return Value:** Returns the current month's alarm value.

**Side Effects:** None

**uint16 RTC\_ReadAlarmYear(void)**

**Description:** Reads the Alarm Year software register value.

**Parameters:** None

**Return Value:** Returns the current year's alarm value.

**Side Effects:** None

**uint8 RTC\_ReadAlarmDayOfWeek(void)**

**Description:** Reads the Alarm DayOfWeek software register value.

**Parameters:** None

**Return Value:** Returns the current day of week's alarm value.

**Side Effects:** None

**uint16 RTC\_ReadAlarmDayOfYear(void)**

**Description:** Reads the Alarm DayOfYear software register value.

**Parameters:** None

**Return Value:** Returns the current day of year's alarm value.

**Side Effects:** None



## void RTC\_WriteAlarmMask(uint8 mask)

- Description:** Writes the Alarm Mask software register with one bit per time/date entry. Alarm true when all masked time/date values match Alarm values.
- Parameters:** mask: Alarm Mask software register value. See the [Alarm Mask Register](#) section for more information about this parameter.
- Return Value:** None.
- Side Effects:** None.

## void RTC\_WriteIntervalMask(uint8 mask)

- Description:** Configures what interval handlers will be called from the RTC ISR. See the [Interrupt Service Routines](#) section for information about how to use this functionality.
- Parameters:** mask: Interval Mask software register value. See the [Interval Mask Register](#) section for more information about this parameter.
- Return Value:** None.
- Side Effects:** None.

## uint8 RTC\_ReadStatus(void)

- Description:** Reads the Status software register, which has flags for DST (DST), Leap Year (LY), AM/PM (AM\_PM), and Alarm active (AA).
- Parameters:** None
- Return Value:** Current component's status with the active alarm bit cleared. Refer to the [Status Register](#) section for more information about the return values.
- Side Effects:** Alarm active (AA) flag clear after read.

## void RTC\_WriteDSTMode(uint8 mode)

- Description:** Writes the DST Mode software register That enables or disables DST changes and sets the date mode to fixed date or relative date. Only generated if DST is enabled.
- Parameters:** mode: DST Mode software register value
- Return Value:** None
- Side Effects:** None



**void RTC\_WriteDSTStartHour(uint8 hour)**

**Description:** Writes the DST Start Hour software register. Used for absolute date entry. Only generated if DST is enabled.

**Parameters:** hour: DST Start Hour software register value

**Return Value:** None

**Side Effects:** None

**void RTC\_WriteDSTStartDayOfMonth(uint8 dayOfMonth)**

**Description:** Writes the DST Start DayOfMonth software register. Used for absolute date entry. Only generated if DST is enabled.

**Parameters:** dayOfMonth: DST Start DayOfMonth software register value

**Return Value:** None

**Side Effects:** None

**void RTC\_WriteDSTStartMonth(uint8 month)**

**Description:** Writes the DST Start Month software register. Used for absolute date entry. Only generated if DST is enabled.

**Parameters:** month: DST Start Month software register value

**Return Value:** None

**Side Effects:** None

**void RTC\_WriteDSTStartDayOfWeek(uint8 dayOfWeek)**

**Description:** Writes the DST Start DayOfWeek software register. Used for relative date entry. Only generated if DST is enabled.

**Parameters:** dayOfWeek: DST Start DayOfWeek software register value

**Return Value:** None

**Side Effects:** None

**void RTC\_WriteDSTStartWeek(uint8 week)**

**Description:** Writes the DST Start Week software register. Used for relative date entry. Only generated if DST is enabled.

**Parameters:** Week: DST Start Week software register value

**Return Value:** None

**Side Effects:** None

**void RTC\_WriteDSTStopHour(uint8 hour)**

**Description:** Writes the DST Stop Hour software register. Used for absolute date entry. Only generated if DST is enabled.

**Parameters:** hour: DST Stop Hour software register value

**Return Value:** None

**Side Effects:** None

**void RTC\_WriteDSTStopDayOfMonth(uint8 dayOfMonth)**

**Description:** Writes the DST Stop DayOfMonth software register. Used for absolute date entry. Only generated if DST is enabled.

**Parameters:** dayOfMonth: DST Stop DayOfMonth software register value

**Return Value:** None

**Side Effects:** None

**void RTC\_WriteDSTStopMonth(uint8 month)**

**Description:** Writes the DST Stop Month software register. Used for absolute date entry. Only generated if DST is enabled.

**Parameters:** month: DST Stop Month software register value

**Return Value:** None

**Side Effects:** None



**void RTC\_WriteDSTStopDayOfWeek(uint8 dayOfWeek)**

**Description:** Writes the DST Stop DayOfWeek software register. Used for relative date entry. Only generated if DST is enabled.

**Parameters:** dayOfWeek: DST Stop DayOfWeek software register value

**Return Value:** None

**Side Effects:** None

**void RTC\_WriteDSTStopWeek(uint8 week)**

**Description:** Writes the DST Stop Week software register. Used for relative date entry. Only generated if DST is enabled.

**Parameters:** week: DST Stop Week software register value

**Return Value:** None

**Side Effects:** None

**void RTC\_WriteDSTOffset(uint8 offset)**

**Description:** Writes the DST Offset register. Allows a configurable increment or decrement of time between 0 and 255 minutes. Increment occurs on DST start and decrement on DST stop. Only generated if DST is enabled.

**Parameters:** offset: DST Offset software register value

**Return Value:** None

**Side Effects:** None

**void RTC\_Init (void)**

**Description:** Initializes or restores the component according to the customizer Configure dialog settings. It is not necessary to call RTC\_Init() because the RTC\_Start() API calls this function and is the preferred method to begin component operation.

**Parameters:** None

**Return Value:** None

**Side Effects:** All registers will be set to values according to the customizer Configure dialog.



## void RTC\_Enable(void)

- Description:** Enables the interrupts, one pulse per second, and interrupt generation on OPPS event.
- Parameters:** None
- Return Value:** None
- Side Effects:** Enables the one pulse per second and central time wheel signals to wake up device from the low-power (Sleep and Alternate Active) modes and leaves them enabled.

## Data Structures

### RTC\_TIME\_DATE

This is the data structure that is used to save the current time and date (RTC\_currentTimeDate), and Alarm time and date (RTC\_alarmCfgTimeDate).

```
typedef struct _RTC_TIME_DATE
{
    uint8 Sec;
    uint8 Min;
    uint8 Hour;
    uint8 DayOfWeek;
    uint8 DayOfMonth;
    uint16 DayOfYear;
    uint8 Month;
    uint16 Year;
} volatile RTC_TIME_DATE;
```

### RTC\_DSTIME

This is the data structure that is used to save time and date values for Daylight Savings Time Start and Stop (RTC\_dstTimeDateStart and RTC\_dstTimeDateStop).

```
typedef struct _RTC_DSTIME
{
    uint8 Hour;
    uint8 DayOfWeek;
    uint8 Week;
    uint8 DayOfMonth;
    uint8 Month;
} volatile RTC_DSTIME;
```

## Constants

There are several constants that define day of week, day in month, and month. When writing code use the constants defined in the header (.h) file.



## Sample Firmware Source Code

Sample Firmware Source Code PSoC Creator provides numerous example projects that include schematics and example code in the Find Example Project dialog. For component-specific examples, open the dialog from the Component Catalog or an instance of the component in a schematic. For general examples, open the dialog from the Start Page or **File** menu. As needed, use the **Filter Options** in the dialog to narrow the list of projects available to select.

Refer to the “Find Example Project” topic in the PSoC Creator Help for more information.

## Interrupt Service Routines

The RTC component uses a single interrupt that triggers every second. The interrupt handler updates the internal date and time structure, and then calls specific functions at appropriate intervals based on the setting configured with `RTC_WriteIntervalMask()` function. The following functions are called if the corresponding bit is set in the Interval Mask Register:

- Every Second handler – `RTC_EverySecondHandler()`
- Every Minute handler – `RTC_EveryMinuteHandler()`
- Every Hour handler – `RTC_EveryHourHandler()`
- Every Day handler – `RTC_EveryDayHandler()`
- Every Week handler – `RTC_EveryWeekHandler()`
- Every Month handler – `RTC_EveryMonthHandler()`
- Every Year handler – `RTC_EveryYearHandler()`

Stub routines for these functions are provided in which you can add your own code. The routine stubs are generated in the `RTC_INT.c` file the first time the project is built. Your code must be added between the provided comment tags as follows:

```
void RTC_EverySecondHandler( void )
{
    /* Place your every second handler code here. */
    /* `#START EVERY_SECOND_HANDLER_CODE` */

    /* `#END` */
}
```

All interrupt status bits of the Power Manager Interrupt Status register are cleared in the interrupt handler. If an interrupt is generated at the same time as a clear, the bit remains set (which causes another interrupt).



## Functional Description

### Time and date

All time and date registers are as accessible as software variables. The time and date change is based on an interrupt event from the Counter component. The following variables are provided:

- Sec – Seconds: 0 to 59
- Min – Minutes: 0 to 59
- Hour – Hours (24 format only): 0 to 23
- DayOfMonth – Day of month: 1 to 31
- DayOfWeek – Day of week: 1 to 7. The number depends on StartOfWeek parameter settings. If **Start of week** is set to **Sunday** then: 1 – Sunday, 2 – Monday..., 7 – Saturday
- DayOfYear – Day of year: 1 to 366
- Month – Month: 1 to 12
- Year – Year: 1900 to 2200 (the actual range is 1 to 65536)

The DayOfWeek is calculated using Zeller's congruence. Zeller's congruence is a simple algorithm optimized for integer math that calculates the day of the week based on year, month, and day of the month. It accounts for leap years and leap centuries.

When you call the RTC\_Start() function, an RTC\_SetInitValues() function is called and all required flags and date calculations are executed. This includes all variables that need calculation:

- DayOfWeek
- DayOfYear
- LY
- AM\_PM
- DST

### Alarm Function

The alarm function provides for seconds, minutes, hours, days of the month, days of the week, month, year, and day of the year. The same variable names are provided for alarm settings. You can set any or all of these alarm settings and configure which of these settings are used in tripping the alarm.



## Periodic Interrupts

Interrupt stubs (locations for user code in separate functions) are provided that can run every second, minute, hour, day, week, month, and year. If code is present in the stub it will be run at the appropriate interval.

## Daylight Savings Time

To enable the Daylight Savings Time feature, select the check box on the Configure dialog (see the [Component Parameters](#) section of this datasheet). Daylight Savings Time is implemented as a set of API update times, dates, and durations. If the current time and date match the start of DST time and date then the DST flag is set and the time is incremented by the set duration.

The start and stop date of DST can be given as fixed or relative. The relative date converts to the fixed one and is checked against the current time as if it were an alarm function. An example of a fixed date is “24 March.” An example of a relative date is “fourth Sunday in May.”

The conversion of a relative date to a fixed date is implemented as a separate function. It is called at the end of the first hour after the RTC\_Start() function is called, and it sets a conversion flag in the RTC\_Start() function itself that indicates the conversion is done. The next conversion will be in the next year.

The DST variables for start and stop time and date are as follows:

- Hour – Hour: 0 to 23 (fixed and relative)
- DayOfWeek – Day of week 1 to 7. The number depends on StartOfWeek parameter settings. If **Start of week** is set to **Sunday** then: 1 – Sunday, 2 – Monday, ... ,7 – Saturday (relative)
- Week – Week in month: 1 to 5 (relative)
- DayOfMonth – Day of month: 1 to 31 (fixed)
- Month – Month: 1 to 12 (fixed and relative)

## Registers

### Status Register

The status register is a read-only register that contains various RTC status bits. This value can be read using the RTC\_ReadStatus() function. There are several bit-field masks defined for the status register. The #defines are available in the generated header file (.h) as follows:

- **RTC\_STATUS\_DST** – Status of Daylight Saving Time. This bit goes high when the current time and date match DST time and date and the time is incremented. This bit goes low after the DST interval and the time is decremented.



- **RTC\_STATUS\_LY** – Status of leap year. This bit goes high when the current year is a leap year.
- **RTC\_STATUS\_AM\_PM** – Status of current time. This bit is low from midnight to noon and high from noon to midnight.
- **RTC\_STATUS\_AA** – Status of alarm active (that is, the alarm bit). This bit is high when current time and date match alarm time and date. After the status is read this bit goes low.

## Alarm Mask Register

The alarm mask register is a write-only register that allows you to control the alarm bit in the status register. The alarm bit is generated by ORing the masked bit fields within this register. This register is written with the `RTC_WriteAlarmMask()` function call. When writing the alarm mask register you must use the bit-field definitions as defined in the header (.h) file. The definitions for the alarm mask register are as follows:

- **RTC\_ALARM\_SEC\_MASK** – The second alarm mask allows you to match the alarm second register with the current second register. The alarm second register is written with the `RTC_WriteAlarmSecond()` function call and read with `RTC_ReadAlarmSecond()`.
- **RTC\_ALARM\_MIN\_MASK** – The minute alarm mask allows you to match the alarm minute register with the current minute register. The alarm minute register is written with the `RTC_WriteAlarmMinute()` function call and read with the `RTC_ReadAlarmMinute()`.
- **RTC\_ALARM\_HOUR\_MASK** – The hour alarm mask allows you to match the alarm hour register with the current hour register. The alarm hour register is written with the `RTC_WriteAlarmHour()` function call and read with the `RTC_ReadAlarmHour()`.
- **RTC\_ALARM\_DAYOFWEEK\_MASK** – The day of week alarm mask allows you to match the alarm day of week register with the current day of week register. The alarm day of week register is written with the `RTC_WriteAlarmDayOfWeek()` function call and read with the `RTC_ReadAlarmDayOfWeek()`.
- **RTC\_ALARM\_DAYOFMONTH\_MASK** – The day of month alarm mask allows you to match the alarm day of month register with the current day of month register. The alarm day of month register is written with the `RTC_WriteAlarmDayOfMonth()` function call and read with the `RTC_ReadAlarmDayOfMonth()`.
- **RTC\_ALARM\_DAYOFYEAR\_MASK** – The day of year alarm mask allows you to match the alarm day of year register with the current day of year register. The alarm day of year register is written with the `RTC_WriteAlarmDayOfYear()` function call and read with the `RTC_ReadAlarmDayOfYear()`.
- **RTC\_ALARM\_MONTH\_MASK** – The month alarm mask allows you to match the alarm month register with the current month register. The alarm month register is written with the `RTC_WriteAlarmMonth()` function call and read with the `RTC_ReadAlarmMonth()`.



- **RTC\_ALARM\_YEAR\_MASK** – The year alarm mask allows you to match the alarm year register with the current year register. The alarm year register is written with the `RTC_WriteAlarmYear()` function call and read with the `RTC_ReadAlarmYear()`.

## Interval Mask Register

The interval mask register is a write-only register that allows you to control handling of interrupt stubs of the RTC component. The interrupt stubs are provided for every second, minute, hour, day, week, month, and year. To enable interrupt stub execution, set the appropriate bit in this register. This register is written with the `RTC_WriteIntervalMask()` function call. When writing the interval mask register, you must use the bit-field definitions as defined in the header (.h) file. The definitions for the interval mask register are as follows:

- **RTC\_INTERVAL\_SEC\_MASK** – The second interval mask allows handling an interrupt stub every second.
- **RTC\_INTERVAL\_MIN\_MASK** – The minute interval mask allows handling an interrupt stub every minute.
- **RTC\_INTERVAL\_HOUR\_MASK** – The hour interval mask allows handling an interrupt stub every hour.
- **RTC\_INTERVAL\_DAY\_MASK** – The day interval mask allows handling an interrupt stub every day.
- **RTC\_INTERVAL\_WEEK\_MASK** – The week interval mask allows handling an interrupt stub every week.
- **RTC\_INTERVAL\_MONTH\_MASK** – The month interval mask allows handling an interrupt stub every month.
- **RTC\_INTERVAL\_YEAR\_MASK** – The year interval mask allows handling an interrupt stub every year.

## DST Mode Register

The DST mode register is a write-only register that allows you to set the Daylight Savings Time mode and enable DST operation. This register is written with the `RTC_WriteDSTMode()` function call. When writing the DST mode register you must use the bit-field definition as defined in the header (.h) file. The definitions for the DST mode register are as follows:

- **RTC\_DST\_ENABLE** – The enable bit controls enabling the daylight savings time functionality.
- **RTC\_DST\_FIXDATE** – Defines the fixed format of the times and dates (start and stop) for daylight savings time functionality. For example, fixed date is 24 March.



- **RTC\_DST\_RELDATE** – Defines the relative format of the times and dates (start and stop) for daylight savings time functionality. For example, relative date is second Sunday in May.

## Conditional Compilation Information

The RTC API requires one conditional compile definition to handle daylight savings time functionality. The DST functions are conditionally compiled only if this option is enabled in the Configure dialog. The software should never use this parameter directly. Instead, use the symbolic name defined.

- **RTC\_DST\_FUNC\_ENABLE** – The daylight savings time functionality enable define is assigned to be equal to the DstEnable value (from the Configure dialog) at build time. It is used throughout the API to compile data saving time functions.

## Component Changes

This section lists the major changes in the component from the previous version.

Version	Description of Changes	Reason for Changes / Impact
1.60.a	Updated the description of the RTC_WriteIntervalMask() function. Updated the "Interrupt Service Routines" section to make it clear how interval handlers are configured.	Interrupt handlers usage description update.
1.60	Fixed issues when global variables used in both code and ISR could potentially be optimized out by compiler.	Prevents optimization issues that could lead to unexpected result.
	The merger region was added to ISR (RTC_INT.c file).	Gives more flexibility to RTC component.
	Updated the code comments for clarification. Fixed a few typos.	Gives correct information on component operation.
	Minor datasheet edits and updates	
1.50.a	The RTC version 1.50 requires cy_boot version 2.x to be used.	The cy_boot component should be updated up to version 2.x for RTC version 1.50 could be used.
	The "Sample Firmware Source Code" section was updated to note that datasheet example project has been added.	The datasheet example project was added to the PSoC Creator.
	RTC_Enable() function description was added.	Every function that is exposed to user should be described in the datasheet.
	Added reference for the parameter descriptions of the following functions: RTC_WriteAlarmMask(), RTC_WriteIntervalMask(), and RTC_ReadStatus().	Clarification comments on the functions' usage.



Version	Description of Changes	Reason for Changes / Impact
	Added Keil reentrancy support in version 1.50.	PSoC 3 with the Keil compiler supports the capability for functions to be called from multiple flows of control.
1.50	Changed the API flow - added the RTC_Init() function.	To comply with corporate standard and provide an API to initialize or restore the component without starting it.
	Renamed some global variables to comply with coding standard. Updated function headers to describe function global parameters usage and returns.	Comply with coding rules. No impacts - macros were created for backward compatibility.
	Updated the datasheet.	Added "Component Changes" section. Added empty "Side Effects" section to the "Application Programming Interface" section.
	The RTCIsLeapYear(uint16 year) function was replaced by RTC_LEAP_YEAR macros. The RTC_SET_ALARM and RTC_IS_BIT_SET were created. The RTC_IS_BIT_SET macro used in a few more conditional expressions.	Fixed a bad practice to call functions within ISR, they were moved out or replaced by macros. One-line functions should be replaced by macros. The code, which is used in a few places, should be replaced by macros.

© Cypress Semiconductor Corporation, 2011. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress product. Nor does it convey or imply any license under patent or other rights. Cypress products are not warranted nor intended to be used for medical, life support, life saving, critical control or safety applications, unless pursuant to an express written agreement with Cypress. Furthermore, Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

PSoC® is a registered trademark, and PSoC Creator™ and Programmable System-on-Chip™ are trademarks of Cypress Semiconductor Corp. All other trademarks or registered trademarks referenced herein are property of the respective corporations.

Any Source Code (software and/or firmware) is owned by Cypress Semiconductor Corporation (Cypress) and is protected by and subject to worldwide patent protection (United States and foreign), United States copyright laws and international treaty provisions. Cypress hereby grants to licensee a personal, non-exclusive, non-transferable license to copy, use, modify, create derivative works of, and compile the Cypress Source Code and derivative works for the sole purpose of creating custom software and or firmware in support of licensee product to be used only in conjunction with a Cypress integrated circuit as specified in the applicable agreement. Any reproduction, modification, translation, compilation, or representation of this Source Code except as specified above is prohibited without the express written permission of Cypress.

Disclaimer: CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Cypress reserves the right to make changes without further notice to the materials described herein. Cypress does not assume any liability arising out of the application or use of any product or circuit described herein. Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress' product in a life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Use may be limited by and subject to the applicable Cypress software license agreement.

