

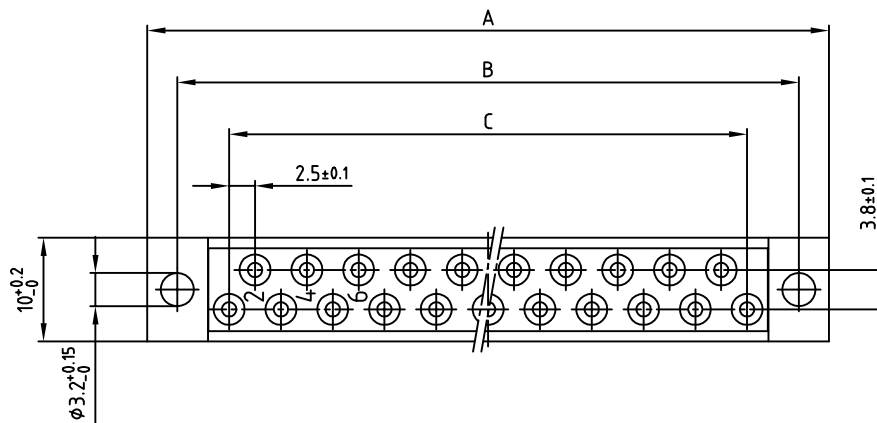



used for: DIN 41617

Part-NO.	POS.	A -0.3	B ±0.1	C ±0.1
102E10059X	13	45.8	40	12x2.5=30
102E10079X	21	65.8	60	20x2.5=50
102E10099X	31	90.8	85	30x2.5=75

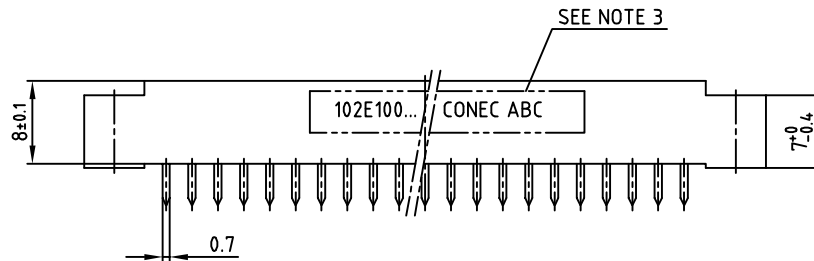

P.C.B.-HOLE DRILLINGS

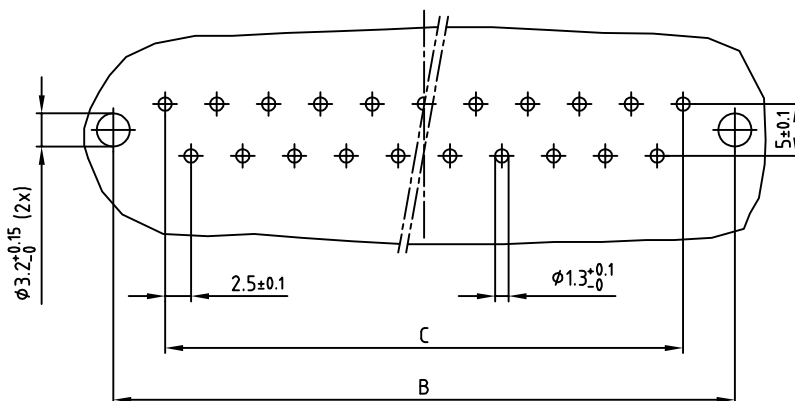

NOTES:

1. INSULATOR: PC GF UL 94 V-1, GREY
2. CONTACTS: COPPER ALLOY
PLATING: HARD SILVER PLATED
500 MATING CYCLES
3. CONNECTOR IS PART MARKED: PART-NO. CONEC ABC

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY, WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC Gmbh
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Original		

tolerance		
dim. in mm		
2012	date	name
drawn	03.09.	Schmidt
appd.	03.09.	Koch
norm	DIN 41617	
d-old		

CONEC

scale:	2:1	
material:	SEE NOTES	
title:	FEMALE CONNECTOR 13-31pos. Version "D" with straight solder pins	
dwg no:	10K3A008	DIN-A 3 sh: 1/1
part no:	SEE TABLE	