




POWER

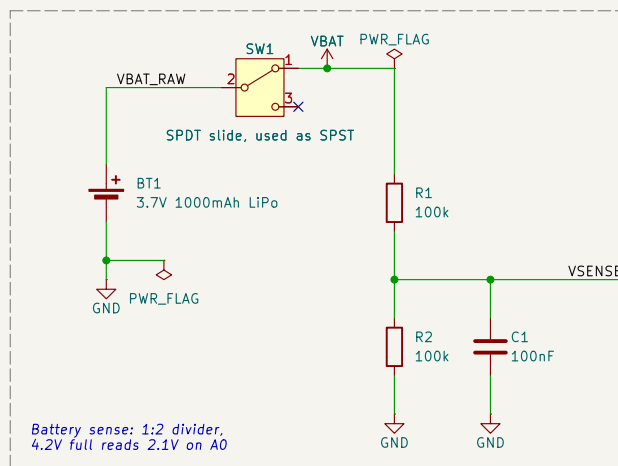


MCU

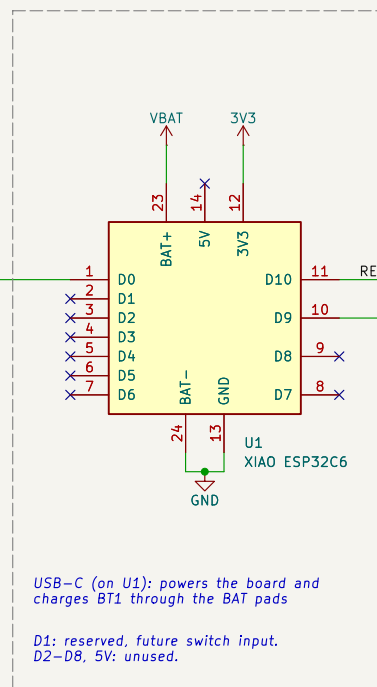


RELAY

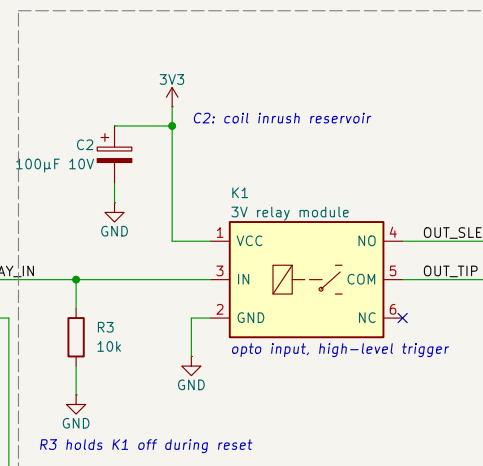

OUTPUT JACK

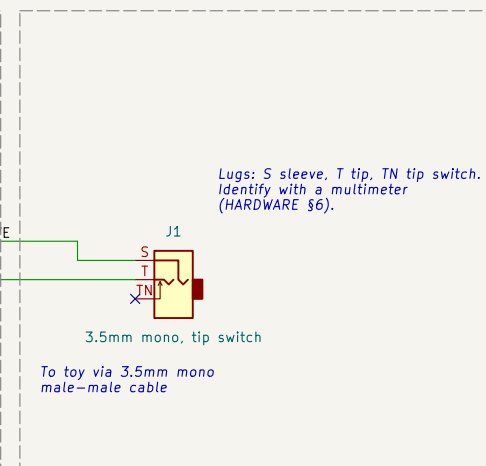

STATUS LED

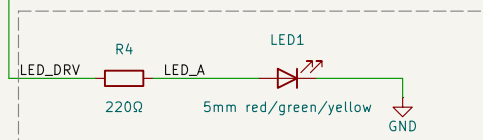

Follows _specs/HARDWARE.md (netlist §7). If they disagree, HARDWARE wins.
U1 pins: Seeded header 1-14; BAT+/BAT- back pads 23/24 (Seeded OPL KiCad lib)
nanoGOAT

Sheet: /
File: adaptive-controller.kicad_sch

Title: nanoGOAT Adaptive Controller

Size: A4 Date: 2026-09-30

KiCad E.D.A. 10.0.6

Rev: A

Id: 1/1