PRODUCT DATASHEET:
DMedi HMI - SHOWING ACTIVE ALARM IN NURSES STATION



MED-HMI-10.1

Product Description

The MED-HMI displays live Nurse Call Alarms activated inside patient wards, conveniently remotely seen from the Nurse's Station or reception desk. The HMI graphics can be customized for a particular floorplan.

General Specifications

- 10.1" 1028 x 600
- LCD, LED Backlight
- Fan-less Cooling System
- Built-in Power Isolation
- PCB coated to resist corrosion in harsh environments
- Customized graphical display
- Customized options for alarm log history, call duration etc.
- NEMA4 / IP65 Compliant Front Panel
- Easy to clean



Product Features

Display	Display: 10.1" TFT Resolution: 1024 x 600 Brightness (cd/m2): 350 Contrast Ratio: 500:1 Backlight Type: LED Backlight Life Time: 50,000 hrs. Colors: 16.7M LCD Viewing Angle: (T/B/L/R): 70/70/80/80 Pixel Pitch (mm): 0.2175(H)x0.2088(V)
Touch Panel	Type: 4-wire Resistive Type Accuracy: Active Area Length(X)?%, Width(Y)?%
Memory	Flash 128 MB RAM 128 MB
Processor	32-bit RISC 600MHz
I/O Port	SD Card Slot: N/A USB Host USB: 2.0 x 1 USB Client: N/A EthernetL: 10/100 Base-T x 1 COM Port Con.A: COM1 RS-485 2W, COM2 RS-485 2W/4W, COM3 RS-485 2W/4W*2 Con.B: COM1 RS-232 4W, COM3 RS-232 2W*3 RS-485 Dual Isolation: N/A CAN Bus N/A HDMI N/A Audio Output N/A
RTC	Built-in
Power	Input Power: 24?0%VDC Power Isolation: Built-in Power Consumption: 650mA@24VDC Voltage Resistance: 500VAC (1 min.) Isolation Resistance: Exceed 50M at 500VDC Vibration Endurance: 10 to 25Hz (X, Y, Z direction 2G 30 minutes)
Specification	Enclosure: Plastic Dimensions: WxHxD: 271 x 213 x 36.4 mm Panel Cutout: 260 x 202 mm Weight: Approx. 1 kg Mount: Panel mount
Environment	Protection Structure: UL Type 4X (indoor use only) NEMA4 / IP65 Compliant Front Panel Storage Temperature: -20?~ 60 ° (-4?~ 140 °) Operating Temperature: 0?~ 50 ° (32?~ 122 °) Relative Humidity: 10% ~ 90% (non-condensing)
Certificate	CE: CE marked UL: cULus Listed (UL 61010-2-201)


Pin Assignment:

Con.B: COM1/COM3 [RS232] 9 Pin, Male, D-sub


PIN#	COM1 [RS232] 4W	COM3 [RS232] 2W
1		
2	RxD	
3	TxD	
4		
5	GND	
6		
7	RTS	TxD
8	CTS	RxD
9	GND	

Con.A: COM1 / COM2 / COM3 [RS485] 9 Pin, Female, D-sub


PIN#	COM1 [RS485] 2W	COM2 [RS485] 2W	COM2 [RS485] 4W	COM3 [RS485] 2W	COM3 [RS485] 4W
1		Data-	Rx-		
2		Data+	Rx+		
3			Tx-		
4			Tx+		
5			GND		
6				Data-	Rx-
7	Data-				Tx-
8	Data+				Tx+
9				Data+	Rx+




Top View

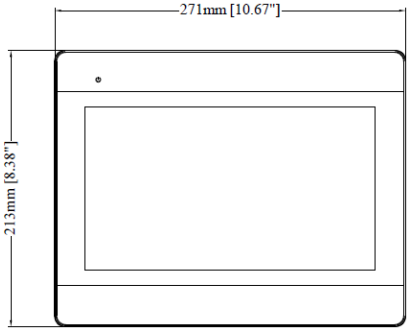


Front View

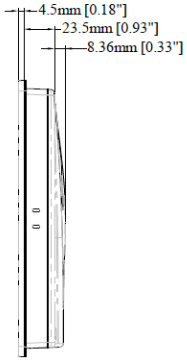


Side View

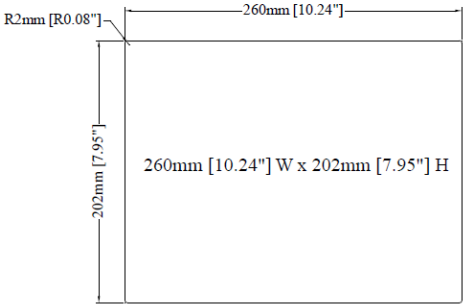

Cutout Dimensions

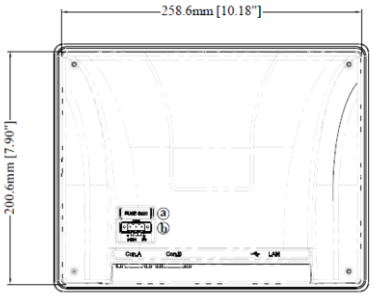

Rear View

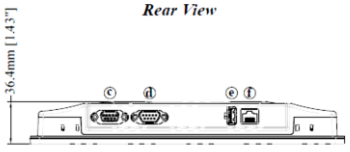

Bottom View