

MASTER OF SCIENCE THESIS

Geometric Control of a Quadrotor with a Suspended Load

Subtitle

N.N. Vo

May 30, 2017



Geometric Control of a Quadrotor with a Suspended Load

Subtitle

MASTER OF SCIENCE THESIS

For obtaining the degree of Master of Science in Mechanical
Engineering at Delft University of Technology

N.N. Vo

May 30, 2017

The work in Master of Science Thesis was supported by Alten. Their cooperation is hereby gratefully acknowledged.



Delft University of Technology

Copyright © Delft Center for Systems and Control
All rights reserved.

DELFT UNIVERSITY OF TECHNOLOGY
DELFT CENTER FOR SYSTEMS AND CONTROL

The undersigned hereby certify that they have read and recommend to the Faculty of Mechanical, Maritime and Materials Engineering for acceptance a thesis entitled “**Geometric Control of a Quadrotor with a Suspended Load**” by **N.N. Vo** in partial fulfillment of the requirements for the degree of **Master of Science**.

Dated: May 30, 2017

Supervisor:

dr.ir. T. Keviczky

Readers:

ir. B. van Vliet

Abstract

A Quadrotor is a type of Unmanned Aerial Vehicle that has received an increasing amount of attention recently with many applications including search and rescue, surveillance, supply of food and medicines as disaster relief and object manipulation in construction and transportation.

An interesting control problem is the Load Position Tracking of a cable suspended load. The system is highly nonlinear and under-actuated. The load cannot be actuated directly and has a natural swing at the end of each Quadrotor movement. A Nonlinear Geometric Control approach allows differential geometric techniques to be applied to systems control, which can be defined on a smooth nonlinear configuration space. This creates a coordinate-free dynamic model, while avoiding the problem of singularities on local charts.

Intro about GC.. Reasons to consider GC..

Where simple linear control methods are restricted to small angle movements, nonlinear control methods allow more aggressive and faster movements. The goal of the project is to investigate the effects on load position tracking performance when the system is modeled and controlled via a Nonlinear Geometric Control approach.

The Quadrotor-Load system is modeled in a compact and coordinate-free fashion which allows the inherent geometric properties of the system to be controlled.

The main goal of this thesis is to research the effects on a cable-suspended load transportation using quadrotors, by involving complex or aggressive maneuvering through implementation of Non-Linear Geometric Control. Where linear control methods are restricted to small angle movement, non-linear control methods allow more aggressive movements.

Furthermore, the studied control techniques are explained and their advantages are addressed. Several trajectory generation approaches and the related optimization techniques are studied. Their applications, with different purposes such as obstacle avoidance, time-optimal and swing-free trajectory planning are explained. The survey is concluded with a discussion

about finding a suitable *****

Define suitable

control design to achieve the quadrotor-assisted task involving manipulation of a cable-suspended load.

Acknowledgements

I would like to thank my supervisors dr.ir. T. Keviczky from DCSC and ir. B. van Vliet from Alten Nederland B.V. for their assistance during the writing of this thesis. I would also ...

Delft, University of Technology
May 30, 2017

N.N. Vo

Table of Contents

Abstract	v
Acknowledgements	vii
1 Introduction	1
1-1 Aim and Motivation	1
1-2 Organization of the Report	2
2 Dynamic Model	3
2-1 Modeling Assumptions	3
2-2 Geometric Modeling	5
2-2-1 Lie Group Configuration Manifold	8
2-2-2 QR-Load Modeling	9
2-2-3 QR Modeling	9
2-3 Classical Modeling	9
2-3-1 QR Modeling	10
2-3-2 QR-Load Modeling	10
2-4 Conclusion	10
3 Control Design	11
3-1 Backstepping Control	12
3-2 Geometric Control of QR system	12
3-2-1 Attitude Tracking	13
3-2-2 Position Tracking	13
3-3 Geometric Control of QR-Load system	13
3-3-1 Quadrotor Attitude Tracking	14
3-3-2 Load Attitude Tracking	14
3-3-3 Load Position Tracking	14
3-4 Parameter - and State Estimation	14
3-5 Conclusion	14

4	Experimental Setup and Results	15
4-1	Software	15
4-2	Experiments	15
4-2-1	Performance Criteria	15
4-2-2	Case A	16
4-2-3	Case B	16
4-2-4	Case C	16
4-3	Command Filtering	16
4-4	Results	17
4-4-1	Case A	17
4-4-2	Case B	17
4-4-3	Case C	17
4-5	Conclusion	17
5	Conclusions and Future Work	19
5-1	Summary	19
5-2	Thesis Contribution	19
5-3	Recommendations for Future Work	19
5-3-1	Modeling Constraints	19
5-3-2	Hybrid Modeling	19
5-3-3	Trajectory Generation	20
	Minimum Snap Trajectory Generation	20
A	Space for Appendix	21
A-1	An appendix section	21
A-1-1	A MATLAB Listing	21
	Bibliography	25
	Acronyms	28

List of Figures

2-1	Quadrotor model representation	4
2-2	Quadrotor with Load model representation	4
2-3	5
4-1	Open Loop control QR	15
4-2	Cases of which the performance could be evaluated	16
5-1	20

List of Tables

2-1	Modeling assumptions Quadrotor model	5
2-2	Modeling assumptions Quadrotor+Load model	5

Chapter 1

Introduction

A Quadrotor (QR) is a type of Unmanned Aerial Vehicles (UAV) that has received an increasing amount of attention recently with many applications being actively investigated. Possible applications include search and rescue, surveillance, reliable supply of food and medicines as disaster relief and object manipulation in construction and transportation. It has already proven itself useful for many tasks like multi-agent missions, mapping, explorations and even acrobatic performances.

Considering a multi-agent task, one can think of multiple QRs assisting in the transportation of a load. This cooperation can be executed in many ways, but this literature focuses on QRs with a cable-suspended load in motion. The suspended object naturally continues to swing at the end of this movement. It could be the case that the residual motion results in damage or in order to avoid obstacles, a accurate positioning is required. Reducing the oscillation, or controlling the position of the suspended load might be necessary, but challenging in the fact that a cable-suspended system is under-actuated.

In this chapter, the motivation for writing this literature study is given. Next, a former research in the scope of this literature survey is discussed. And finally, the organization of the report is presented.

1-1 Aim and Motivation

The inspiration for this literature survey is build upon the idea of creating a multiple autonomous QR system for a cooperative towing task. The advantage of using multiple robots for object manipulation is the possibility to reduce complexity of the individual robot, decrease cost over traditional robotic systems and high reliability. One can think of examples in nature, where individuals coordinate, cooperate and collaborate to perform tasks that they individually can not accomplish. Redundancy makes development of fail safe control methods possible and can extend the capabilities of a single robot.

The aim is to control the position of a suspended load using a Quadrotor. Former work on Quadrotor control regularly rely on linear control such as PID or LQR for a dynamic model linearized about the hover state. A single Quadrotor is considered for the transportation of a cable suspended load, which exerts forces and torques on the Quadrotor. This motivates to compare a linear control strategy with a non-linear control strategy.

State of the art methods

Research and Engineering goals

Organization of the report

1-2 Organization of the Report

- Chapter 1
- Chapter 2
- Chapter 3
- Chapter 4
- Chapter 5
- Chapter ??

Hoe de keuze tot stand is gekomen, hoe uitgebreid?

Moet ik nog een stuk wijden aan literature survey?

Chapter 2

Dynamic Model

The dynamics of the QR-Load system are described by the laws of kinematics and the application of Newton's laws or Lagrangian mechanics. Opposed to the classical modeling techniques, it is also possible to describe the system's configuration space as a differentiable manifold with the tools of differential geometry.

In order to simulate the system and the effects of Geometric Control, the system is modeled with the following assumptions.

In order to avoid complexities and ambiguities associated with attitude representations such as *Euler-Angles* or *quaternions*, the attitude dynamics of the Quadrotor-Load system can be globally expressed on the Special Orthogonal Group $SO(3)$

The derived mathematical model is represented by a set of dynamic equations commonly used for rigid body transformations. Considering the properties of the system, the QR is modeled as a rigid body. The motion of a rigid body can be described by a translation of the center of mass and a rotation about the center of mass. This principle describes a rigid body with six degrees of freedom, driven by forces and moments.

2-1 Modeling Assumptions

The Quadrotor model representation is shown in Figure 2-1. Three Cartesian coordinate frames are defined:

- The body-fixed reference frame $\{\mathcal{B}\}$ (Body Frame)
with unit vectors $\{\mathbf{b}_1, \mathbf{b}_2, \mathbf{b}_3\}$ along the axes

- The ground-fixed reference frame $\{\mathcal{I}\}$ (Inertial Frame)
with unit vectors $\{\mathbf{e}_1, \mathbf{e}_2, \mathbf{e}_3\}$ along the axes
- The intermediary frame $\{\mathcal{C}\}$, ($\{\mathcal{I}\}$ rotated by the yaw angle ψ)
with unit vectors $\{\mathbf{c}_1, \mathbf{c}_2, \mathbf{c}_3\}$ along the axes

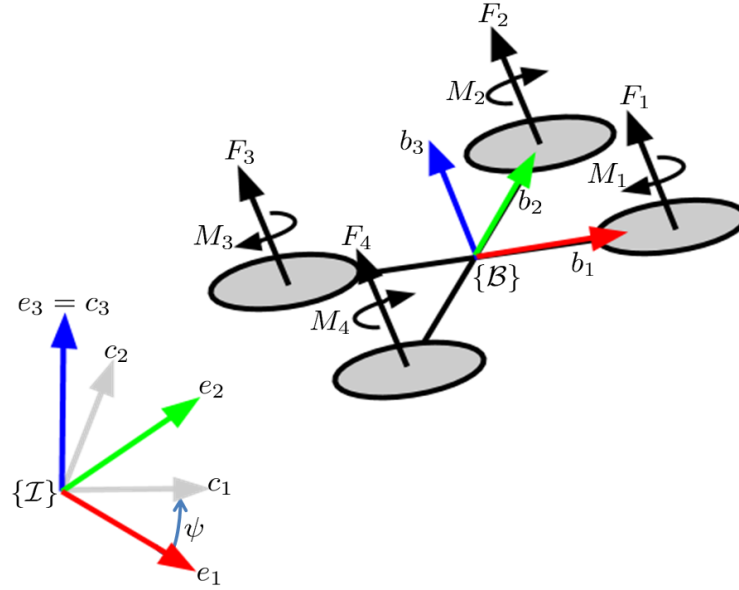


Figure 2-1: Quadrotor model representation



Figure 2-2: Quadrotor with Load model representation

The position of the body frame is described by a vector evolving on \mathbb{R}^3 , and is represented with respect to the inertial frame. The orientation of the body frame with respect to the inertial frame evolves on a nonlinear space, for which several methods exist to describe this, such as *Euler Angles*, quaternions or rotation matrices.

Table 2-1 shows the most common assumptions that are used for modeling the QR, simplifying the complexity of the model.

[1] includes uncertainties in the translational dynamics and rotational dynamics. Out of the scope, might be interesting.

- The rotation of the Earth does not affect the flight of the QR
- The structure of the QR is rigid and symmetric.
Elastic deformations and shock (sudden accelerations) of the QR are ignored.
- The mass distribution of the QR is symmetrical in the x-y plane.
- The inertia matrix is time-invariant.
- Aerodynamic effects acting on the QR are neglected.
- The propellers are rigid \Rightarrow The thrust produced by rotor i is parallel to the axis of rotor i .
- The air density around the QR is constant.
- Drag factor d and thrust factor b are constant.
Thrust force F_i and drag moment $\tau_{drag,i}$ of each propeller is proportional to the square of the propeller speed. $F_i = b\omega_i^2$ and $\tau_{drag,i} = d\omega_i^2$, where ω_i is the rotor speed.

Table 2-1: Modeling assumptions Quadrotor model

- The cable is modeled as a rigid and massless cable.
- The tension in the cable is considered to be non-zero.
This implies that the subsystem consisting of a Quadrotor and Load in free fall is disregarded.
- Aerodynamic effects acting on the load are neglected.
- Assumption Details Assumption 2

Table 2-2: Modeling assumptions Quadrotor+Load model

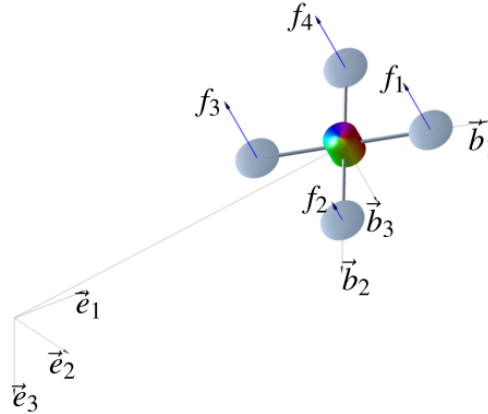


Figure 2-3

2-2 Geometric Modeling

Differential Geometry is used to analyze the underlying geometric properties of a system.

With geometric modeling the configuration space is a group manifold instead of a Euclidean space. The kinetic and potential energies are expressed in terms of this configuration space and its velocities.

Rigid Body Attitude Dynamics:

$$J\dot{\Omega} + \Omega \times J\Omega = mg\rho \times R^T e_3 + u \quad (2-1)$$

$$\dot{R} = R\hat{\Omega} \quad (2-2)$$

[2] Why is this used, pros/cons

Mechanics studies the dynamics of physical bodies acting under forces and potential fields. In Lagrangian mechanics, the trajectories are obtained by finding the paths that minimize the integral of a Lagrangian over time, called the action integral. Rigid body dynamics are characterized by Lagrangian/Hamiltonian dynamics. The dynamics of a Lagrangian system has unique geometric properties and these are exploited to obtain Euler-Lagrange equations. The resulting intrinsic form of the Euler-Lagrange equations are more compact than equations expressed in terms of local coordinates.

When angular errors are large, the difference in Euler angles is no longer a good metric to define the orientation error. Local coordinates often require symbolic computational tools due to complexity of multi-body systems. Hence, the error is rather written as the required 3-D rotation to get from the current to the desired orientation. As a result, the equations of motion and the control systems can be developed on a configuration manifold in a coordinate-free, compact, unambiguous manner, while singularities of local parameterization are avoided to generate agile maneuvers in a uniform way.

Most of nonlinear dynamics and control problems are studied in a linear space.

$$\dot{x} = f(t, x, u), \quad x \in \mathbb{R}^n, u \in \mathbb{R}^m, f : \mathbb{R}^{n+m+1} \rightarrow \mathbb{R}^n \quad (2-3)$$

Geometric Mechanics and Control is used to understand the structure of the equations of motion of a system in order to facilitate its analysis and design. The evolution of the system and the design of controllers is done on a nonlinear manifold.

In mathematics there are different types of singularity, in these cases we are talking about the situation where:

Many points in one representation are mapped onto a single point in another representation. Infinitesimal changes close to the singularity in one representation may cause large changes in the other representation.

Computational Geometric Mechanics and Control

Computation algorithms must be developed which preserve the geometric properties of a mechanical system.

Robust and careful numerical implementation of geometric control theory to complex engineering systems.

Provides nontrivial maneuvers that are globally valid on a nonlinear configuration manifold.

Assumptions

Problems, singularities with Euler-Angles

Other attitude representations, such as exponential coordinates, quaternions, or Euler angles, can also be used following standard descriptions, but each of the representations has a disadvantage of introducing an ambiguity or singularity. Why charts on $SO(3)$ [https://en.wikipedia.org/wiki/Charts_on_SO\(3\)](https://en.wikipedia.org/wiki/Charts_on_SO(3))

$$SO(3) \triangleq \{R \in \mathbb{R}^{3 \times 3} : RR^T = I_{3 \times 3}, \det(R) = 1\} \quad (2-4)$$

Rotational matrices with determinant 1 is a Lie group: $SO(3)$

$SO(3)$ is the group of all rotations about origin of three-dimensional Euclidean space

Rotation about the origin is a transformation that preserves the origin, Euclidean distance and orientation.

Every rotation has a unique inverse rotation and the identity map satisfies the definition of a rotation.

Possible ways to represent rotations: orthogonal matrices with determinant 1, axis and rotation angle, geometric algebra as a rotor, sequence of three rotations about three fixed axes; Euler Angles

Lie group is a group that is also a differentiable manifold.

Differentiable manifold is a type of manifold that is locally similar enough to a linear space to allow to do calculus.

Manifold is a topological space that locally resembles Euclidean space near each point. Each point of an n-dimensional manifold has a neighbourhood that is homeomorphic to the n-dimensional Euclidean space.

Homeomorphism is a continuous function between topological spaces that has a continuous inverse function. (mug transforms to a torus)

Difference $SO(3)$ and $so(3)$ \hookleftarrow $SO(3)$ is a Lie Group, $so(3)$ is Lie Algebra

Special Orthogonal group

$$SO(3) = \{R \in \mathbb{R}^{3 \times 3} | R^T R = I, \det R = 1\} \quad (2-5)$$

The group operation for $SO(3)$ corresponds to matrix multiplication.

The attitude kinematics equation is given by

$$\dot{R} = R\hat{\Omega} \quad (2-6)$$

where $\Omega \in \mathbb{R}^3$ is the angular velocity represented in the body fixed frame. The hat map $\hat{\cdot} : \mathbb{R}^3 \rightarrow \mathfrak{so}(3)$ is an isomorphism between \mathbb{R}^3 and the set of 3×3 skew symmetric matrices. The Lie algebra $\mathfrak{so}(3)$ is defined by

$$\hat{\Omega} = \begin{bmatrix} 0 & -\Omega_3 & \Omega_2 \\ \Omega_3 & 0 & -\Omega_1 \\ -\Omega_2 & \Omega_1 & 0 \end{bmatrix} \quad (2-7)$$

Rotation formalisms in three dimensions https://en.wikipedia.org/wiki/Rotation_formalisms_in_three_dimensions#cite_note-5

Combining two successive rotations, each represented by an Euler axis and angle, is not straightforward, and in fact does not satisfy the law of vector addition, which shows that finite rotations are not really vectors at all. It is best to employ the rotation matrix or quaternion notation, calculate the product, and then convert back to Euler axis and angle.

Euler Angles

However, the definition of Euler angles is not unique and in the literature many different conventions are used. These conventions depend on the axes about which the rotations are carried out, and their sequence (since rotations are not commutative). Therefore, Euler angles are never expressed in terms of the external frame, or in terms of the co-moving rotated body frame, but in a mixture. Other conventions (e.g., rotation matrix or quaternions) are used to avoid this problem.

Geometric mechanics is a modern description of classical mechanics from the perspective of differential geometry [3, 4]. It explores the geometric structure of a Lagrangian or Hamiltonian system through the concept of vector fields, symplectic geometry, and symmetry techniques. Geometric mechanics provides fundamental insights into mechanics and yields useful tools for dynamics and control theory.

In control systems engineering, the underlying geometric features of a dynamic system are often not considered carefully. For example, many control systems are developed for the standard form of ordinary differential equations, namely $\dot{x} = f(x, u)$, where the state and the control input are denoted by x and u . It is assumed that the state and the control input lie in Euclidean spaces, and the system equations are defined in terms of smooth functions between Euclidean spaces. However, for many interesting mechanical systems, the configuration space cannot be expressed globally as a Euclidean space.

In [5] dynamics and optimal control problems for rigid bodies are studied, incorporating their geometric features. The focus lies on obtaining geometric properties of the dynamics of rigid bodies, how their configuration can be described and how these geometric properties are utilized in control system analysis and design. Computational methods for rigid bodies, that preserve the underlying Lagrangian/Hamiltonian system structure of rigid body dynamics as well as the Lie group structure of the configurations are developed.

2-2-1 Lie Group Configuration Manifold

The configuration of a rigid body can be described by the location of its mass center and the orientation of the rigid body in a 3-D space. The location of the rigid body can be expressed in Euclidean space, but the attitude evolves in a nonlinear space that has a certain geometry. The attitude of a rigid body is defined as the direction of a body-fixed frame with respect to a reference frame, considered as a linear transformation on the vector space \mathbb{R}^3 .

The attitude can be represented mathematically by a 3×3 orthonormal matrix. The set of 3×3 orthonormal matrices with positive determinant is a manifold as it is locally diffeomorphic to a Euclidean space, and it also has a group structure with the group action of matrix multiplication. A smooth manifold with a group structure is referred to as a Lie group; the

Lie group of 3×3 orthonormal matrices with positive determinant is referred to as the special orthogonal group, $SO(3)$ [6].

The configuration manifold for the attitude dynamics of a rigid body is $SO(3)$, and the configuration manifold for combined translational and rotational motion of a rigid body is the special Euclidean group $SE(3)$, which is a semi-direct product of $SO(3)$ and \mathbb{R}^3 . A direct product of the Lie groups $SE(3)$, $SO(3)$, and \mathbb{R}^n can represent the configuration of multiple rigid bodies, and it is also a Lie group since a product of Lie groups is also a Lie group. Therefore, the configuration manifold of an interconnection of rigid bodies is also a Lie group.

2-2-2 QR-Load Modeling

2-2-3 QR Modeling

System Identification
Model Validation?

Pendulum $\in S^2$: Based on [7]. *****

2-3 Classical Modeling

When assuming small angle maneuvers, *Euler-angles* can be used to locally parameterize the orientation of the body-fixed reference coordinate frame with respect to the inertial reference coordinate frame.

A commonly used method for modeling a system is via Newton's law and Lagrangian mechanics. Based on Euler-Lagrange? \rightarrow Geometric Mechanics

Pro/Cons of Classical Modeling Techniques vs Geometric Modeling

Linearized model/State Space model vs. Geometric modeling

2-3-1 QR Modeling

2-3-2 QR-Load Modeling

$$ax = \begin{bmatrix} (f * m * \sin(\phi_q) * \sin(\psi_q) + f * m_l * \sin(\phi_q) * \sin(\psi_q) - f * m_l * \cos(\theta)^2 * \sin(\phi_q) * \sin(\psi_q) + f * m * \\ (l * m * m_l * \\ -(g * m^2 + g * m * m_l - f * m * \cos(\phi_q) * \sin(\psi_q) * \sin(\theta) * \cos(\theta) * \sin(\phi_q) * \sin(\psi_q) \\ \end{bmatrix} \quad (2-8)$$

2-4 Conclusion

Geometric Mechanics/Lie Groups/Lie Algebra is used in order to represent the dynamics of the system onto the nonlinear configuration manifold $SE(3)$

Advantage of this method is

Enables to model on

That type of control is discussed in the next chapter

Chapter 3

Control Design

Existing Control Systems for Quadrotor UAVs:
Based on the linearized dynamics of a quadrotor UAV
Singularities in representing complex maneuvers
Fundamental restriction in tracking nontrivial trajectories

Benchmark with Linear Control

Reason to consider Geometric Control

Geometric Control Theory explores the application of differential geometric techniques to systems control. Therefore, the prerequisites for its study are linear algebra, vector calculus, differential geometry and non-linear control theory. Geometric control theory is the study of how the geometry of the state space influences controls problems. This includes local properties like curvature, and global properties like the number of ‘holes’ in the space (sphere vs doughnut).

Intuition: The objective is to have both the dynamics and its control input to directly flow along their inherent manifolds instead of on local charts. For example, I want to write out the equations of motion of a 3D pendulum and also control its orientation directly on the Special Orthogonal Group (using rotation matrices) instead of using local charts induced by Euler Angle Parametrizations (θ , ϕ and ψ - the three famous angles of dynamics!).

Pros:

- Compact expressions that are also intuitive.
- Globally defined (no singularities!).

Therefore, one can build almost globally attractive controllers.

Cons:

-j The math gets very involved very quickly. (This could be subjective)

In contrast to hybrid control systems [10], **complicated reachability set analysis is not required** to guarantee safe switching between different flight modes, as the region of attraction for each flight mode covers the configuration space almost globally. Tracking control system can be developed on $SO(3)$, therefore it avoids singularities of Euler-Angles.

Control Schemes

Nonlinear Geometric Control. Error functions. Tracking controllers.

Attitude Controller

Define errors associated with the attitude dynamics of the QR. The attitude and angular velocity tracking error should be carefully chosen as they evolve on the tangent bundle of $SO(3)$. [?]

How to select gains for errors

Constants [11] or matrices; enabling unique gains for roll/pitch/yaw [12]

Parameter Estimation

State Estimation

3-1 Backstepping Control

Nonlinear control: Backstepping control is common. Definition backstepping: A technique for designing stabilizing controls for a special recursive class of nonlinear dynamical systems.

In a backstepping control approach, the control law is designed by using states as virtual control signals. At each step, a

3-2 Geometric Control of QR system

Control input [7]

$$u = -k_R e_R - k_\Omega \Omega - mg\rho \times R^T e_3 \quad (3-1)$$

Insert into Equation 2-1; closed loop dynamics are given by

$$J\dot{\Omega} = -\Omega \times J\Omega - k_R e_R - k_\Omega \Omega \quad (3-2)$$

$$\dot{R} = R\hat{\Omega} \quad (3-3)$$

where is e_Ω ?

Three Flight Modes [2, 13]

Attitude Controlled Mode: track an attitude command $R_d(t)$

Position Controlled Mode: track a position command $x_d(t)$ and a heading direction $b_{1_d}(t)$

Velocity Controlled Mode: track a velocity command $v_d(t)$ and a heading direction $b_{1_d}(t)$

3-2-1 Attitude Tracking

Asymptotic tracking of the quadrotor attitude does not require specification of the thrust magnitude. As an auxiliary problem, the thrust magnitude can be chosen in many different ways to achieve an additional translational motion objective. For example, it can be used to asymptotically track a quadrotor altitude command [28]. Since the translational motion of the quadrotor UAV can only be partially controlled; this flight mode is most suitable for short time periods where an attitude maneuver is to be completed. [14]

3-2-2 Position Tracking

Explain how f and \vec{b}_{1_d} is obtained from $x_d(t)$?

The attitude and angular velocity tracking error should be carefully chosen as they evolve on the tangent bundle of the nonlinear space $SO(3)$. [11]

Why? Appendix[11], and [3]?

The error function on $SO(3)$ is chosen to be [11]

$$\Psi(R, R_d) = \frac{1}{2} \text{tr} [I - R_d^T R] \quad (3-4)$$

3-3 Geometric Control of QR-Load system

Three Flight Modes

QR Attitude Controlled Mode: track a QR attitude command $R_d(t)$ and a heading direction $b_{1_d}(t)$

Load Attitude Controlled Mode: track a load attitude command $q_d(t)$

Load Position Controlled Mode: track a load position $x_{L,d}(t)$

3-3-1 Quadrotor Attitude Tracking

3-3-2 Load Attitude Tracking

3-3-3 Load Position Tracking

3-4 Parameter - and State Estimation

How to choose parameters and how to estimate states?

3-5 Conclusion

What is Geometric Control?

Why Geometric Control?

Control design will be based on Nonlinear Geometric Control

The proposed control system is robust to switching conditions since each flight mode has almost global stability properties, and it is straightforward to design a complex maneuver of a QR. [13] Where are the Error functions based on?

Form bridge between Geometric Control and Hybrid Control

Why Hybrid Control?

Parameter Estimation can be done by

State Estimation can be done by

Experimental Setup and Results

Benchmark can be a simple control design

Benchmark can be Praveen's MPC controller to compare results

Benchmark can be open loop response Figure 4-1. *****




Figure 4-1: Open Loop control QR

4-1 Software

Simulink Solvers etc.

4-2 Experiments

4-2-1 Performance Criteria

Performance that can be evaluated for the cases in Figure 4-2. Performance can be specified as the following items.

- Step Response
 - Settling time (if swing minimization is important)
 - Rising time (important if time critical)

- Overshoot (if max swing is critical)
- Steady state error / swing of load (if accuracy is important)
- Disturbance Rejection
- Trajectory tracking
 - Can we minimize time, while minimizing position error (All Cases)
 - Minimum position error (All Cases)
 - Maximum amplitude/frequency of wave with respect to stability (Case B)
- Computational Effort (?)

Explain cases, why interesting and what can be expected?

4-2-2 Case A

4-2-3 Case B

4-2-4 Case C

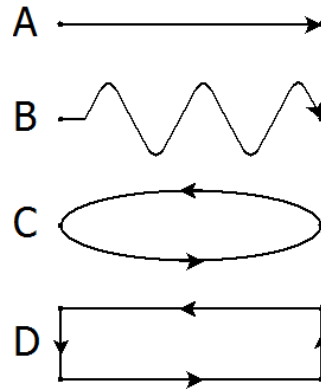


Figure 4-2: Cases of which the performance could be evaluated

4-3 Command Filtering

To compute $\dot{R}_c, \ddot{R}_c, \dot{q}_c, \ddot{q}_c$, the virtual control command to stabilize the loop within. [?]

A command filter is implemented by following examples from [8] and [9]. The load attitude controller generates a commanded QR attitude R_c and the load position controller generates a commanded load attitude q_c . The controllers contain functions of these signals and their

derivatives. Instead differentiation of these signals, the signals are obtained by integration by filtering the original signals R_c^o and q_c^o . The state space implementation of this filter is [9]

$$\dot{x}_1 = x_2 \quad (4-1)$$

$$\dot{x}_2 = -2\zeta\omega_n x_2 - \omega_n^2(x_1 - x_c^o) \quad (4-2)$$

where $x_1 = x_1$ and $\dot{x}_c = x_2$. The transfer function has the form

$$\frac{X_c(s)}{X_c^o(s)} = H(s) = \frac{\omega_n^2}{s^2 + 2\zeta\omega_n s + \omega_n^2} \quad (4-3)$$

Where x_c is the filtered signal, ζ the damping ratio and ω_n the undamped natural frequency. See Figure ??.

4-4 Results

4-4-1 Case A

4-4-2 Case B

4-4-3 Case C

4-5 Conclusion

Conclusions and Future Work

5-1 Summary

5-2 Thesis Contribution

5-3 Recommendations for Future Work

Model Validation

5-3-1 Modeling Constraints

There are several techniques to handle input saturation, the most popular ones are anti-windup techniques. Back-calculation is such a method for PID to activate the integrator, is this possible for NL control?

5-3-2 Hybrid Modeling

Switching between several flight modes yields autonomous acrobatic maneuvers. Robust to switching conditions ***why?

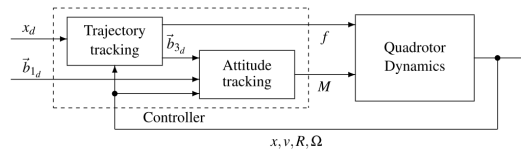


Figure 5-1

5-3-3 Trajectory Generation

Trajectory is first generated by hand. A simple trajectory that will not push the system to its limits yet

Next, trajectory can be generated by solving a **QP!** via minimum snap generation.

Trajectory Generation by minimizing Snap Trajectory. QP.

Minimum Snap Trajectory Generation

Appendix A

Space for Appendix

A-1 An appendix section

A-1-1 A MatlabListing

```
%  
% Comment  
%  
n=10;  
for i=1:n  
    disp('Ok');  
end
```

1

6

Bibliography

- [1] F. Goodarzi, D. Lee, and T. Lee, “Geometric nonlinear PID control of a quadrotor UAV on $SE(3)$,” *Control Conference (ECC), 2013 European*, pp. 3845–3850, 2013.
- [2] T. Lee, “Geometric Control of an Autonomous Quadrotor UAV,” *Control*.
- [3] F. Bullo and A. D. Lewis, *Geometric control of mechanical systems: modeling, analysis, and design for simple mechanical control systems*. Springer, 2005.
- [4] V. Jurdjevic, *Geometric Control Theory*. Cambridge: Cambridge University Press, 1997.
- [5] T. Lee, *Computational Geometric Mechanics and Control of Rigid Bodies*. PhD thesis, The University of Michigan, 2008.
- [6] R. M. Murray, Z. Li, and S. S. Sastry, *A Mathematical Introduction to Robotic Manipulation*, vol. 29. 1994.
- [7] T. Lee, M. Leok, and N. H. McClamroch, “Stable Manifolds of Saddle Points for Pendulum Dynamics on S^2 and $SO(3)$,” p. 9, 2011.
- [8] J. A. Farrell, M. Polycarpou, M. Sharma, and W. Dong, “Command Filtered Backstepping,” pp. 1923–1928, 2008.
- [9] V. Djapic, J. Farrell, and W. Dong, “Land vehicle control using a command filtered backstepping approach,” *Proceedings of the American Control Conference*, pp. 2461–2466, 2008.
- [10] J. H. Gillula, H. Huang, M. P. Vitus, and C. J. Tomlin, “Design of guaranteed safe maneuvers using reachable sets: Autonomous quadrotor aerobatics in theory and practice,” in *Proceedings - IEEE International Conference on Robotics and Automation*, pp. 1649–1654, 2010.
- [11] T. Lee, M. Leok, and N. H. McClamroch, “Geometric Tracking Control of a Quadrotor UAV on $SE(3)$,” *49th IEEE Conference on Decision and Control*, no. 3, pp. 5420–5425, 2010.

-
- [12] D. Mellinger and V. Kumar, “Minimum snap trajectory generation and control for quadrotors,” in *Proceedings - IEEE International Conference on Robotics and Automation*, pp. 2520–2525, 2011.
 - [13] T. Lee, M. Leok, and N. McClamroch, “Control of complex maneuvers for a quadrotor UAV using geometric methods on $SE(3)$,” *arXiv*, 2010.
 - [14] F. A. Goodarzi, “Geometric Nonlinear Controls for Multiple Cooperative Quadrotor UAVs Transporting a Rigid Body,” no. December 2009, 2015.

Bibliography

- [1] F. Goodarzi, D. Lee, and T. Lee, “Geometric nonlinear PID control of a quadrotor UAV on $SE(3)$,” *Control Conference (ECC), 2013 European*, pp. 3845–3850, 2013.
- [2] T. Lee, “Geometric Control of an Autonomous Quadrotor UAV,” *Control*.
- [3] F. Bullo and A. D. Lewis, *Geometric control of mechanical systems: modeling, analysis, and design for simple mechanical control systems*. Springer, 2005.
- [4] V. Jurdjevic, *Geometric Control Theory*. Cambridge: Cambridge University Press, 1997.
- [5] T. Lee, *Computational Geometric Mechanics and Control of Rigid Bodies*. PhD thesis, The University of Michigan, 2008.
- [6] R. M. Murray, Z. Li, and S. S. Sastry, *A Mathematical Introduction to Robotic Manipulation*, vol. 29. 1994.
- [7] T. Lee, M. Leok, and N. H. McClamroch, “Stable Manifolds of Saddle Points for Pendulum Dynamics on S^2 and $SO(3)$,” p. 9, 2011.
- [8] J. A. Farrell, M. Polycarpou, M. Sharma, and W. Dong, “Command Filtered Backstepping,” pp. 1923–1928, 2008.
- [9] V. Djapic, J. Farrell, and W. Dong, “Land vehicle control using a command filtered backstepping approach,” *Proceedings of the American Control Conference*, pp. 2461–2466, 2008.
- [10] J. H. Gillula, H. Huang, M. P. Vitus, and C. J. Tomlin, “Design of guaranteed safe maneuvers using reachable sets: Autonomous quadrotor aerobatics in theory and practice,” in *Proceedings - IEEE International Conference on Robotics and Automation*, pp. 1649–1654, 2010.
- [11] T. Lee, M. Leok, and N. H. McClamroch, “Geometric Tracking Control of a Quadrotor UAV on $SE(3)$,” *49th IEEE Conference on Decision and Control*, no. 3, pp. 5420–5425, 2010.

-
- [12] D. Mellinger and V. Kumar, “Minimum snap trajectory generation and control for quadrotors,” in *Proceedings - IEEE International Conference on Robotics and Automation*, pp. 2520–2525, 2011.
 - [13] T. Lee, M. Leok, and N. McClamroch, “Control of complex maneuvers for a quadrotor UAV using geometric methods on $SE(3)$,” *arXiv*, 2010.
 - [14] F. A. Goodarzi, “Geometric Nonlinear Controls for Multiple Cooperative Quadrotor UAVs Transporting a Rigid Body,” no. December 2009, 2015.

Nomenclature

α	Alpha nomenclature 2
β	Beta nomenclature 2
σ	The total mass of angels per unit area
A	The area of the needle point
a	The number of angels per unit area
m	The mass of one angel
N	The number of angels per needle point
ω_i	Angular velocity of rotor i around its axis, $i = \{1, 2, 3, 4\}$
$\tau_{drag,i}$	Drag moment generated by each propellor
$\{\mathbf{b}_1, \mathbf{b}_2, \mathbf{b}_3\}$	Unit vectors along the axes of $\{\mathcal{B}\}$
$\{\mathbf{c}_1, \mathbf{c}_2, \mathbf{c}_3\}$	Unit vectors along the axes of $\{\mathcal{C}\}$
$\{\mathbf{e}_1, \mathbf{e}_2, \mathbf{e}_3\}$	Unit vectors along the axes of $\{\mathcal{I}\}$
$\{\mathcal{B}\}$	Body Frame
$\{\mathcal{C}\}$	Intermediary Frame
$\{\mathcal{I}\}$	Inertial World Frame
b	Thrust factor
d	Drag factor
$A(s)$	Answer function
a_b	Another variable
a_f, b_f, c_f and d_f	The variables I am trying to group

Acronyms

3mE	Mechanical, Maritime and Materials Engineering
DCSC	Delft Center for Systems and Control
TU Delft	Delft University of Technology
CMP	Cooperative Manipulation Problem
ATP	Aerial Towing Problem
QR	Quadrotor
UAV	Unmanned Aerial Vehicles
LTI	Linear Time Invariant
LTV MPC	Linear Time Variant MPC
MPC	Model Predictive Control
MIPC	Mixed-Integer Predictive Control
NMPC	Nonlinear Model Predictive Control
MLD-MPC	Mixed Logical Dynamical - Model Predictive Control
LQ	Linear Quadratic
LQR	Linear Quadratic Regulator
MLD	Mixed Logical Dynamical
PWA	Piecewise Affine
ALADIN	Alternating Direction Inexact Newton method
HYSDEL	HYbrid Systems DEscription Language

DHA	Discrete Hybrid Automata
LP	Linear Programming
DP	Dynamic Programming
NLP	Nonlinear Program
QP	Quadratic Programming
QCP	Quadratic Constrained Programming
QCQP	Quadratically Constrained Quadratic Program
SQP	Sequential Quadratic Programming
IP	Interior Point
MIP	Mixed Integer Programming
MILP	Mixed Integer Linear Programming
MIQP	Mixed Integer Quadratic Programming
MIQCP	Mixed-integer Quadratically Constrained Programming
CoG	Center of Gravity
OCP	Optimal Control Problem
DAE	Differential-Algebraic Equation
PD	Proportional-Derivative
PID	Proportional-Integral-Derivative
RLS	Recursive Least Squares