



AUTOMATION AND ROBOTIC PROJECT 1

BRETON-BELZ Emmanuel - UNISA 2015 - 2016

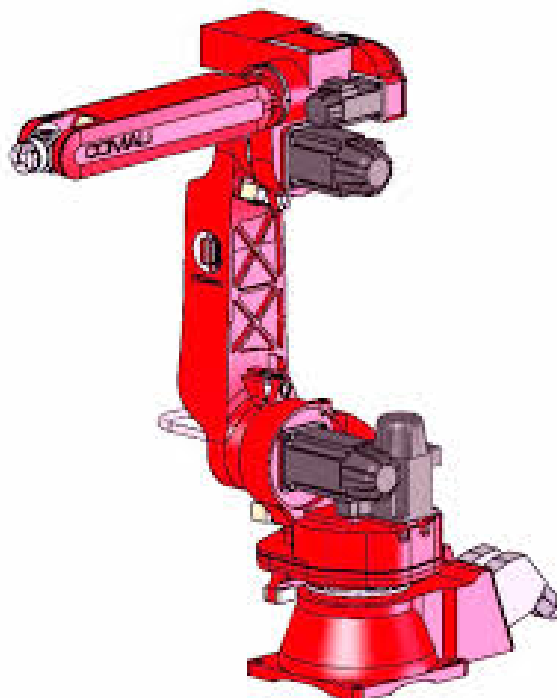


Table of contents

1	Introduction	2
2	Work	3
2.1	Compute the roto-translation matrix	3
2.1.1	Required	3

Chapter 1

Introduction

In this project we apply the theory seen in automatic and robotic course. The aim is creating a function that returns the most important parameters for moving the end-effector of the robot. We can see it on the figure 1 with it's own axes "ANS". This parameters are the position and the orientation of the end-effector, the rotation matrix of the end-effector and the roto-translation matrices for the differents input parameters (angles and translations of the joints).

The function takes two parameters, the first is a vector values repressenting the translation or the rotation of each axe. The is the type of representation we are in. It can be "ZYZ" or "RPY" (roll, pitch, yaw).

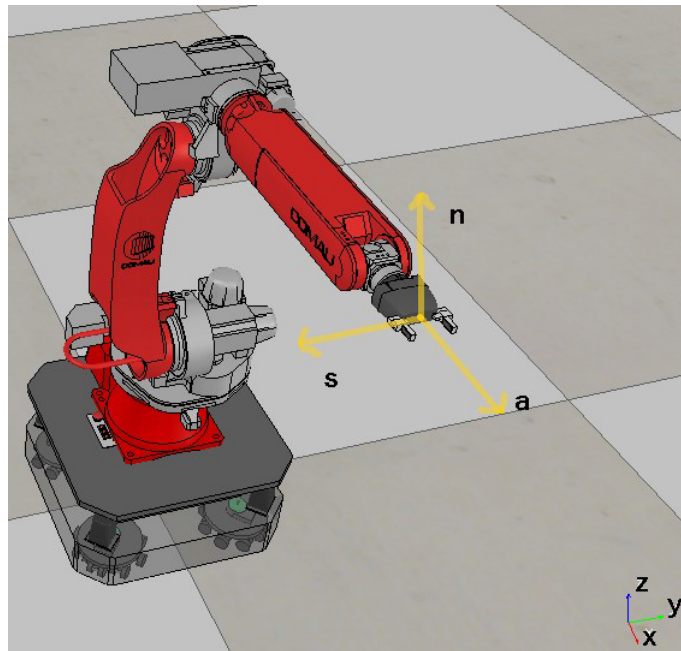


Figure 1.1: Robot smart5 six with a pince on the end-effector

Chapter 2

Work

2.1 Compute the roto-translation matrix

2.1.1 Required

To get the roto-translation matrix we need to multiply the different matrices for each junction and the A_n^0

List of Figures

1.1	Robot smart5 six with a pince on the end-effector	2
-----	-------------------------------------------------------------	---