

PRESTIGIOUS CLIENTS



© MEDIA MONK | 9825149664

GST No. 24ABECS4427RIZU | CIN No. U52100GJ2020PTC116485



Since 1995

SHAH
Engineers & Consultants Private Limited



4, "RUSHABH", Nr. Sita Hospital, Old Subjail Gali,
Khatodara, Ring Road, Surat - 395 002. Gujarat.



(0261) 4890982, 983, 984



info@shahgroup.co



www.shahgroup.co

Surat | Ankleshwar | Vapi | Ahmedabad | Delhi | Pune | Kolkata | Chennai



Since 1995

SHAH
Engineers & Consultants Private Limited

*Trusted partner for clean, dry, energy efficient
Compressed Air & Gas Generation system*




SHAH GROUP TIMELINE

In the year 1994, **Mr. Kaushik Shah** a co founder envisioned a dream to serve in its best way the rapid & phenomenal industrial growth in the city of Surat. Later the dream was turned to reality by inception of **Shah Enterprise** in 1995.

Since then the group has been taking strides towards success by following the path of honesty & uncompromising business ethics, we strive hard to fulfill all our commitments by adopting effective management, competent engineers, strategic team work, technical expertise and structural infrastructure.

In this success voyage of **30 years** in the industry, **Shah Group** has incorporated some world class brands and its products under one roof and our unwavering focus for energy efficient solution gave us the reputation of being a most competitive partner for Compressed Air & Gas generation system to consumption. In other word we provide complete Compressed Air & Gas generation system, Air Treatment equipment supported by Hydraulic, Pneumatic & Instrumentation components.

In Span of 3 decade, **Shah Group** has successfully stamped its presence in Pan India.

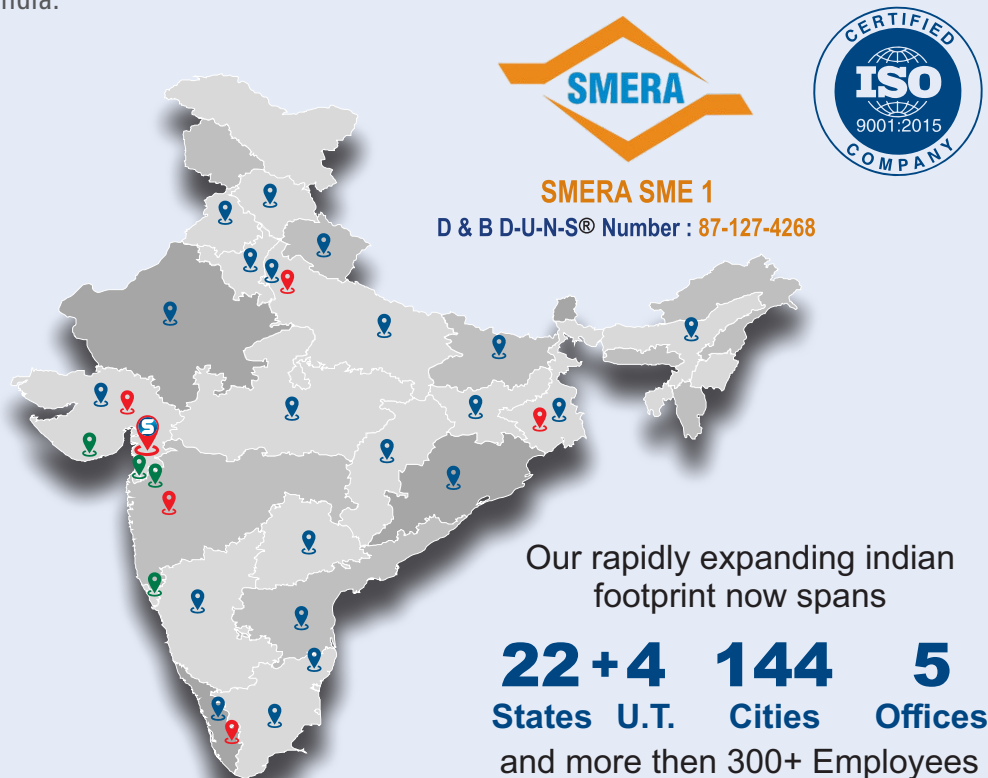

Serving Industries


- Oil & Gas
- CNG/Bio-CNG
- Power Generation
- Renewable Energy (Solar, Wind, H₂)
- Critical / High Pressure Industry
- Industrial Manufacturing
- Chemical & Processing Industry
- Heavy Engineering
- Diamond Industry
- Food Industry
- Steel Industry
- Textiles
- SS Wire Industry
- Pharmaceuticals

We serve with a touch of humanity, Brand is a by product.



"A logo is the company emblem giving the first impression of your company upon the world outside." The logo of Shah group has been designed with perfection to bring out the real meaning of what it really is. The word "S" depicts our passion for Sales & Services. They also represent strength of the company which can with stand all types of difficulties.

WE ARE PROUDLY ASSOCIATED WITH...

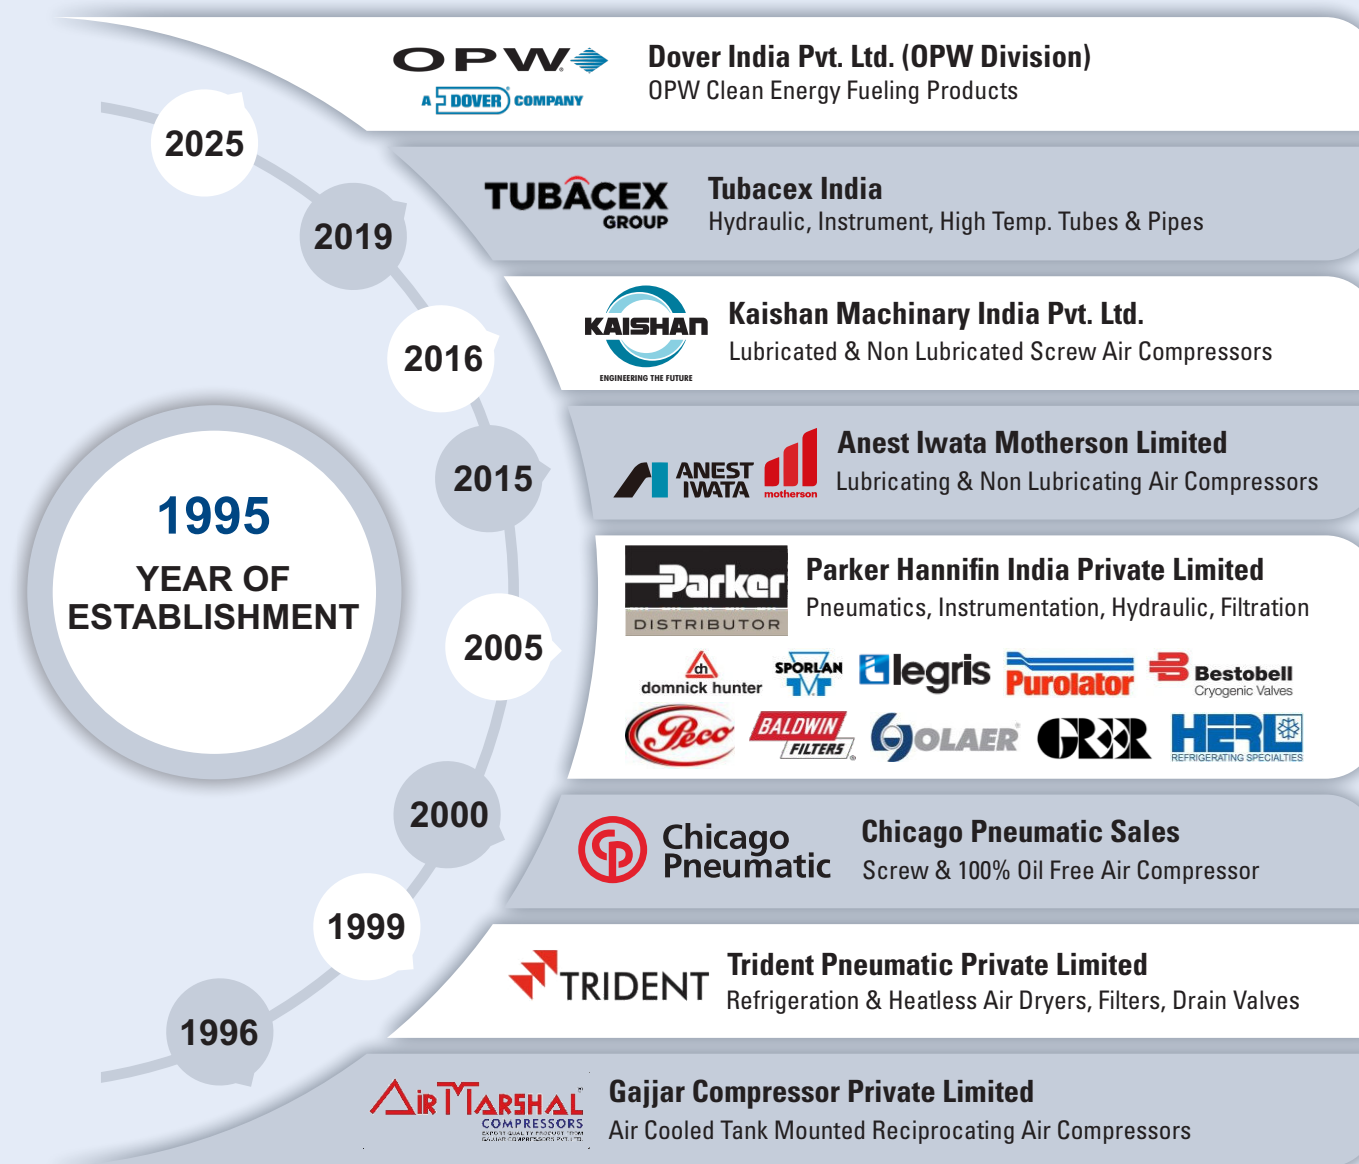

Products & Services at glance

- Air Compressor
- Air Dryers
- Filtration
- Air Piping
- Breathing Air Purification System
- Remote Data Monitoring For Compress Air System
- Instrumentation
- Hydraulic
- Pneumatics
- Hose Pipes
- Nitrogen Generator
- Hydrogen Generator
- Zero Air Generator
- Tubes & Pipes
- Fluid Connectors
- AMC Contract
- CMC Contract
- Air Audit
- Energy Audit

5800+
Happy &
Continued
Customers
invite
you to
share in
their
Satisfaction





PNEUMATICS

FITTINGS, AIR BLOW GUN, FLOW CONTROL VALVE, BALL VALVE

Size : 3mm to 16mm Tube OD,
Working Pressure : Upto 50 Bar
Fitting Types : Push, Compression, Control Fitting
Ball Valve Size : 1/4" to 4" BSP Female



NON-METALLIC TUBES



Tube MOC : PU, Nylon/Polyamide,
Polyethelene, FEP, PFA
Tube OD : 3mm to 16mm,
Temperature : -196°C to 260°C
Working Pressure : Upto 50 Bar

DIAL-AIR REGULATOR



Port Size : 1-1/2" and 2"
Max. Supply Pressure: 20 Bar
Opt. Temperature : Up to 65°C
High Flow : 0.4 to 11 Bar
Low Pressure : 0.1 to 3 Bar

AIR FILTER, REGULATOR, LUBRICATOR

Port Size : 1/4" to 1"
Working Pressure : Upto 17 Bar
Temperature : Upto 60°C



Precision Air Regulator Size Up to 2"

PNEUMATIC/ AIR CYLINDER



Types : Std. ISO Cylinder, Rodless Cylinder,
Thrust Cylinder, Actuator
Working Pressure : Upto 17 Bar
Temperature : Upto 80°C
Size: ISO 32 to 125 mm
Stroke: 25 to 500 mm
Rodless Cylinder : Bore Size - 10 to 80 mm

DISTRIBUTION & CONTROL PRODUCTS

SOLENOID OPERATED CONTROL VALVES

Function : 2/2 Way, 3/2 Way, 5/2 Way
Port Size : 1/4" to 3" Female Threaded
MOC : Brass, SS
Media : Air, Steam, Hot & Cold Water, Light Oil
Application : Pet blowing, Oil Burner, Hot Water/
Steam Control, Car Washing, Food Production,
Water Dispensing, Cooling System



QUICK RELEASE COUPLING (QRC)

Function : Single Shut-off, Double Shut-off
MOC : Brass, Steel, SS, Thermoplastic
Size : 1/4" to 1"
Working Pressure: Up to 35 bar



O-RING KITS & ACCESSORIES

Available in 5 types of Kit (Inches & MM)
Most Commonly Used Sizes
MOC: NBR, Viton



MODULAR INTERFACE VALVE

Valve Island (Multifunctional Valve)
Working Pressure: 10 Bar
Temperature: Upto 60° C



PUSH BUTTONS / SELECTOR SWITCHES

Working Pressure : 1 to 10 Bar
Temperature : Up to 60°C
Function : 3/2 NC / NO





SS TUBES & PIPES AT A GLANCE

Tubacex has the widest portfolio of tubular solutions. Tubacex produce and sell seamless stainless steel and high nickel alloy tubes for different applications as well offering different services.



Seamless SS Tubes & Pipes

Size : 3 mm to 50 mm
Standards : ASTM A213-Aw, A269 and others
MOC : SS 316L & others
Application : All Hydraulic & Instrumentation Application



High Temp. Tubes 500°C to 1170°C

Size : 3/8" to 6"
Standards : ASTM A312 & other.
MOC : SS 310, 253MA, Inconel
Application : Heat Exchanger, Reactors, Metal Industries, Petro Chemicals, Glass, Wire Drawing Mills, Bundy Tube Production, Cement, Blast Furnace.



Schedule Pipes

Size : 3/8" to 6"
Standards : ASTM A312 / A999 & other.
MOC : SS 304L, SS316L
Application : Multipurpose Industrial use

INSTRUMENTATION COMPONENTS



AUTOCLAVE COMPONENTS



TUBE FITTINGS

- Single/Double Ferrule
- Adapter/Reducer
- PFA Fittings



CONTROL VALVES

- Diaphragm Valve
- Needle Valve
- Check Valve
- Relief Valve
- Ball & Plug Valve
- Swing Out Ball Valve
- Excess Flow Shutoff Valve
- Filter Valve



PRESSURE REGULATORS

- Single / Two-Stage Regulator
- Back Pressure Regulator
- Vaporizing Regulator
- High-Pressure Regulator
- High-Flow Regulator
- Tied Diaphragm Regulator
- Negative Pressure Regulator



Change Over System


Continuous Gas Management



Needle Valve



Pro-Bloc Valve



Sample Cylinder



Air Header

Manifold





HYDRAULIC CONNECTORS & MONITORING

QUICK RELEASE COUPLING (QRC)

Size : 1/8" to 2-1/2"

Working Pressure : Upto 700 Bar

MOC : Steel, Brass, SS



HYDRAULIC PIPE, FITTINGS (ERMETO)



Size : 4 to 42 mm Pipe OD

Working Pressure : Upto 400 Bar

MOC : Steel/CS, SS316



TEST POINT / MINIMISE COUPLING HIGH PRESSURE HOSE PRESSURE GAUGE CONNECTOR



Pressure / Temperature Sensor
Pressure / Temperature Controller
Flow Sensor



HYDRAULIC RUBBER HOSE PIPE

Size : 1/4" to 4" ID

Media : High Pressure Oil Line

Working Pressure : Up to 700 Bar

Temperature : Up to 100°C



STEAM HOSE

Size : 1/2" to 2" ID

Media : High Temp. Steam

Working Pressure : Up to 16 Bar

Temperature : Up to 205°C



HYDRAULIC FILTRATION & CONTROL


DIRECTION & PRESSURE CONTROL VALVE



Proportional Valve
Sandwich Valve
Ball Valve

Cartridge Valve
Manifold

GEAR PUMP | AXIAL PISTON PUMP | MOTOR

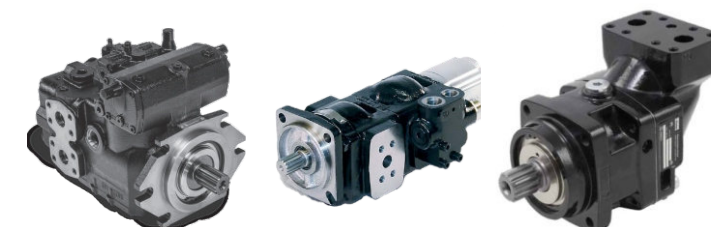

HYDRAULIC / FUEL FILTERS

Working Pressure: Upto 500 Bar

Application: Industrial Production Machinery,
Mobile Hydraulics, Marine/Military Application



AIR/OIL COOLER & WATER/OIL COOLER



Operating Pressure : 30 BarMax.

Inlet Temperature: 120°C

Media: Mineral Oil,
Oil/Water emulsion,
Waterglycol

Cooling Capacity (Air): Up to 300 kW

HYDRAULIC CYLINDER



Pressure : Upto 210 Bar

Std. Bore Dia: 1" to 8"

Temperature : Upto 70°C

ACCUMULATOR BLADDER/DIAPHRAGM PISTON PULSATION DAMPER

Capacity : 0.2 to 575 Ltrs.

Pressure : 20 to 690 Bar

Parts & Accessories : Charging Kit
Bladder Kit
Fluid End Seal Kit





CNG DISPENSER

3 Banks & Dual Arm CAR / BUS / COMBO

"PARKER NEXT GEN CNG DISPENSERS" are designed to work in hazardous areas under Class I, Div. I, group IIA & IIB. The dispensers "Measure" the mass flow of CNG and "Monitor" the delivery pressure to control the filling operation, and meet statutory regulations on safety of vehicle being filled



Type of dispenser

- Car (Dual Arm NZS Nozzle/ NGV)
- Bus (Single Arm Bus Nozzle)
- Combo (One Arm NZS and Second Arm Bus Nozzle)

Specification

- Inlet Pressure Rating: 250 Kg/cm2 Max.
- Electrical Rating: 230 VAC, 50/60 Hz
- Operating Temperature: -20 C to +55 C
- RS485 Interface communication compatibility

Advantages

- Safety Interlocks
- Zero Gas Loss
- Both side Dual display facility (Arm A & B)
- Non Resettable Totalizer
- Pan India Service Support

CNG CAR & BUS PROVER KIT, LCV FILL POST, BREAKWAY

Manufacturing of LCV Fill Post, Decanting Post and Prover Kit for measuring the dispensing Gas.

LCV Post

- Working Pressure 250 KG/Cm2.
- Multiple option to fill the CASCADE.
- Easy Operation and Compact design.
- Standard arrangements as per customer's norm.
- Easy Installation and Minimal maintenance.
- Compatible Up to 2000 SCMH.



CLEAN ENERGY FUELING PRODUCTS

CNG / HYDROGEN



CNG Nozzles

OPW offers an extensive line of CNG Nozzles that are used throughout the world

Body: Brass

Jaws: Stainless steel

Seals: Specially formulated polymers and elastomers specific to high pressure NGV applications.

NT2A nozzle has 5 times more life compared to our competitor and earlier version of Class-B Nozzle.

CAR NOZZLE : NT2AP30



BUS NOZZLE : CT5000S



Breakaways



Car Breakaway
Fill-Line Breakaway
(FLB-1000) Standard Duty



Bus Breakaway
Fill-Line Breakaway (FLB-5000)
- Heavy-Duty Truck/Bus

Body: Stainless Steel

Internal Components: Stainless Steel

Seals: Specially formulated polyurethane seals to withstand high pressure NGV applications

Receptacles



CAR RECEPTACLES : LE30 / LB36



BUS RECEPTACLES : CL50

OPW L-Series NGV1 certified Re-fueling Receptacles are designed for use on medium storage natural gas vehicles, including automobiles, light trucks, shuttle buses and vans.

Body & Adaptor Shaft: Stainless Steel

Internal Components: Stainless Steel

Seals: Specially formulated polymers and elastomers specific to high-pressure NGV Application.



SPECIAL APPLICATIONS & PRODUCTS

HYDROGEN ECOSYSTEM SOLUTIONS



FAST SWITCHING SOLENOID VALVE

Application: Textile weaving looms, Printing machines, Sorting machines
Function: 2/2 Way Normally Close, 24VDC
Port Connection: G3/8" Female
Working Pressure: Upto 7 Bar
Temperature: 0°C to 40°C

MINIATURE DIAPHRAGM PUMPS

Media: Air, Argon, Helium, Hydrogen, Methane, Nitrogen, Oxygen and other non-reacting gases



Applications

Patient Monitoring CO₂ Monitors
Wound Therapy Gas Sampling
Medical / Surgical Instruments
Aerosols and Particle Analysis
Combustion Analyzers
Point of Care Diagnostics
Anesthesia Monitors



MINIATURE PROPORTIONAL VALVES

APPLICATIONS

Gas Chromatography
Mass Spectrometry
Ventilators
Oxygen Concentrators/Conservers

Anesthesia Delivery & Monitors
Mass Flow Control
Blood Pressure Monitoring
Vitreous Retinal Surgery



BIOGAS FILTERS

Available in Various Micron Quality
Low Pressure : Up to 500 PSIG
High Pressure : Up to 5000 PSIG
Flow : Up to 1600 SCFM
Size : 1/4" to 3" NPT, BSP



Hydrogen Hose

For highest safety at hydrogen filling stations
Designed to match high demands of high-pressure Hydrogen transfer.



Permanent Tube Fittings Phastite®


Compression fitting offers an extremely quick, easy, and simple way of permanently connecting tube.



Medium Pressure Needle Valves, Check Valve (Autoclave)

Unique stem/seat and packing design. The valves are available with two different styles of connection options including cone and thread.

H₂
HYDROGEN

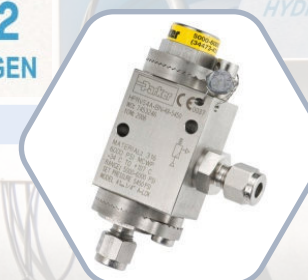


Proportional Relief Valves

Compact proportional relief valve provides an automatic over-pressure protection mechanism for sensitive equipment. The HPRV valve's design with accurate and consistent cracking and resealing operation.



Excess Flow Shutoff Valves

For Hydrogen Gas Delivery
Automatically shuts off the supply of Hydrogen in the event of a downstream rupture of the supply line.

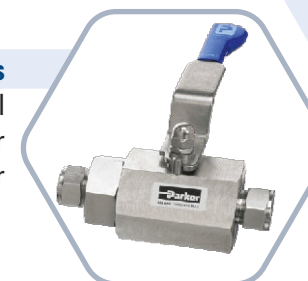


Isolation / Ball Valves

High performance two piece bi-directional instrumentation ball valves offer the user full cold working pressure ratings up to 689 Bar



Nylon, FEP, PFA Tube & Fittings (SS316L)

For Hydrogen electrolyzer and fuel cells
-Hydrogen, Oxygen, or liquid circuit

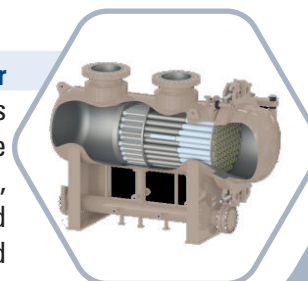

Filter-Coalescer

For Hydrogen electrolyzers
A horizontal gas filter-coalescer is a proven winner in the field, doing the work of a gas filter separator and vertical gas coalescer combined, delivering ultra-clean gas with high efficiency removal of solid and liquid contaminants, while effectively handling higher inlet solids and liquid loads than conventional gas coalescers.



Head Office & Plant

Kaishan is sixty years old company & World's third largest air/gas compressor, mining equipment & drilling equipment manufacturer based in china. Group is having 32 sub subsidiary companies all across the world. It is supported by R & D center in USA & other manufacturing plants in Alabama-USA, Austria & Germany, Research and Development for all new compressor products is undertaken at Seattle, Washington USA with manufacturing facilities in China offering the best of world. Combining highly skilled engineering with low cost manufacturing allows the highest value of machinery to be offered to our customers.

Manufacturing Capabilities

Kaishan is manufacturing over 1,66,000 compressor (air+gas) compressors and around 3 lacs reciprocating compressor per year. It is diversified engineering company in the field of Geothermal, Mining, drilling Etc...

Exports

Kaishan products are exported to more than 60 countries including Germany, Japan, Korea, Russia & Africa.

In House Facilities

Kaishan's processes are 85% vertically integrated allowing full control of material supply chain, component cost and quality. The unique approach to manufacturing also provides us the opportunity to respond quickly to changing market demands, ability to bring new technologies and products to market cost effectively.

Energy Efficient Products

Product offering outstanding energy efficiency and reliability are the core of kaishan's mission. We have fundamental belief in environmental sustainability. Producing machinery with the highest energy efficiency that will meet the present need of industry and also the future.



- Kaishan USA Headquarter & Manufacturing Facility - Mobile, AL
- Kaishan Subsidiary
- Kaishan INDIA Headquarter - Mumbai
- Kaishan Headquarter - Quazhou, China



PMV

Permanent Magnet Variable Speed Screw Air Compressors



KRSA

Specially Designed Energy Efficient Low Pressure Screw Air Compressors



Oil Free Screw Compressors
KROF Series



KRSD

Standard Normal Pressure, Direct Drive Screw Air Compressors



KRSP2

Premium Efficiency Two Stage Screw Air Compressor (Global Leader in Air Compressor Efficiency)



Centrifugal Compressors
T- SERIES

KRSD SERIES ROTARY SCREW AIR COMPRESSOR

- Integrated micro processor controller
- Energy efficient, durable and reliable.
- Lower maintenance cost
- Equipped with 5 X 6 profile and 1:1 direct drive.
- Large rotor size



Model No	Pressure Bar	Flow cfm	Power kW	Discharge Connection	Dimension mm	Weight kg
KRSD 18	8	124	18.5	G1	1370 X 900 X 1110	510
	10	98				
KRSD 22	8	145	22	G1	1370 X 900 X 1110	540
	10	124				
	13	96				
KRSD 30	8	205	30	G1 1/2	1600 x 960 x 1220	650
	10	163				
	13	143				
KRSD 37	8	245	37	G1 1/2	1600 x 960 x 1220	700
	10	205				
	13	160				
KRSD 45	8	307	45	G1 1/2	1630 x 960 x 1220	880
	10	240				
	13	201				
KRSD 55	8	371	55	G1 1/2	1850 X 1200 X 1500	1090
	10	304				
	13	237				
KRSD 75	8	510	75	G2	2160 X 1220 X 1580	1550
	10	410				
	13	350				
KRSD 90	8	607	90	G2	2160 X 1320 X 1580	2000
	10	501				
	13	410				
KRSD 110	8	742	110	DN65	2440 X 1400 X 1710	2700
	10	597				
	13	491				
KRSD 132	8	858	132	DN65	2440 x 1400 x 1710	2800
	10	738				
	13	583				
KRSD 160	8	1059	160	DN80	3060 X 1860 X 2050	4200
	10	848				
	13	717				
KRSD 185	8	1183	185	DN80	3060 X 1860 X 2050	4250
	10	1042				
	13	833				
KRSD 200	8	1300	200	DN80	3060 X 1860 X 2050	4300
	10	1162				
	13	1031				
KRSD 220	8	1501	220	DN100	3360 X 2160 X 2170	4800
	10	1289				
	13	1158				
KRSD 250	8	1607	250	DN100	3360 X 2160 X 2170	4870
	10	1480				
	13	1279				

NOTE:- Capacity other than above please contact us for technical assistance.
Flow as per ISO 1217 Annexure C

P|M|V

PERMANENT MAGNET VARIABLE FREQUENCY ROTARY SCREW AIR COMPRESSORS

These highly advanced air compressors series from Kaishan Group provide world class efficiency and performance. These series air compressors are equipped with Permanent magnet motor. This rare earth material technology gives higher possible rotating speed, wider operating range & higher energy efficiency, which is not possible with standard induction motor. Heavy duty construction to ensure superior durability and reliability.

Kaishan's permanent Magnet variable frequency rotary screw air compressors operate at peak efficiency even with 80% reduction in air output. In other words it consumes less energy for same output.




Energize your
compressed air system
with Permanent
Magnet Series



Features:

- Motor Efficiency better than IE 4
- Complete control of air output to meet operating demand.
- Lower energy input for required air generation.
- Excessive part load energy consumption reduce significantly.
- Gradual increase in motor speed eliminates starting spikes and cost penalties.
- Maintain a steady system pressure which helps to lowering down system stress and overall air demand.
- Reduce artificial demand due to lower operating pressure.
- Significantly lower noise level.

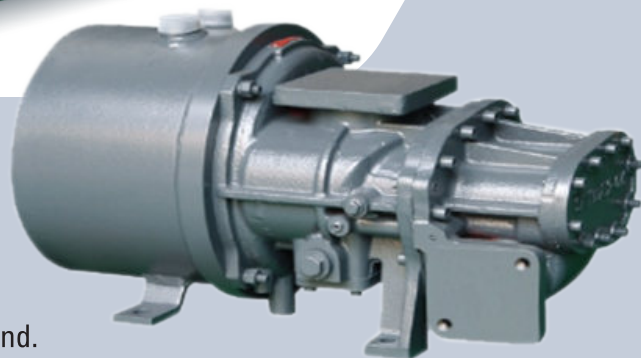

PMV SERIES SINGLE & TWO STAGE SCREW AIR COMPRESSOR

Model No	Discharge Pressure Bar	Flow Range cfm	Motor Power kW	Discharge Connection	Dimension L X B X H mm	Weight kg
PMV-15	6-9	102 - 84	15	G1	1200 X 830 X 1240	380
PMV-22	6-9	149 - 127	22	G1	1200 x 830 x 1290	480
PMV-37	6-9	263 - 222	37	G 1-1/2	1400 x 1000 x 1540	710
PMV-55	6-9	422 - 353	55	G 1-1/2	1500 x 1160 x 1700	990
PMV2-75-6	6	609	75	DN 65	2760 X 1630 X 1735	2220
PMV2-75-7	7	581				
PMV2-75-8	8	541				
PMV2-75-10	10	504				
PMV2-90-6	6	798	90	DN 80	2760 x 1630 x 1735	2770
PMV2-90-7	7	742				
PMV2-90-8	8	708	90	DN 65	2760 x 1630 x 1735	2680
PMV2-90-10	10	606				
PMV2-110-6	6	940	110	DN 80	3070 x 1810 x 1800	3000
PMV2-110-7	7	882				
PMV2-110-8	8	846				
PMV2-110-10	10	740				
PMV2-132-6	6	1209	132	DN 100	3300 x 1810 x 2100	4380
PMV2-132-7	7	1050			3070 x 1810 x 2080	3150
PMV2-132-8	8	990		DN 80	3070 x 1810 x 1800	3050
PMV2-132-10	10	880			3070 x 1810 x 2080	3050
PMV2-160-6	6	1401	160	DN 100	3660 x 1980 x 2100	4700
PMV2-160-7	7	1346				
PMV2-160-8	8	1262				
PMV2-160-10	10	1045				
PMV2-185-6	6	1665	185	DN 100	3660 x 1980 x 2230	5070
PMV2-185-7	7	1512			3660 x 1980 x 2100	4700
PMV2-185-8	8	1464				
PMV2-185-10	10	1262				
PMV2-200-6	6	1762	200	DN 100	3660 x 1980 x 2230	5050
PMV2-200-7	7	1666			3660 x 1980 x 2100	4950
PMV2-200-8	8	1586				
PMV2-200-10	10	1349				
PMV2-220-6	6	2057	220	DN 100	3890 X 2160 X 2250	6120
PMV2-220-7	7	1849				5450
PMV2-220-8	8	1747				
PMV2-220-10	10	1508				

NOTE:- Capacity other than above please contact us for technical assistance.

Flow as per ISO 1217 Annexure C




TWO STAGE SCREW COMPRESSOR

Two-stage compressors have power advantage of 8% to 15% over equivalent size single-stage compressors for two key reasons: Inter Cooling System and Division of Compression Ratio.

The KRSP 2 series compressors offer unmatched full- load efficiency often providing two-year paybacks in energy savings compared with a single-stage compressor.

Inter Cooling System

Incorporates inter-stage coolant injection which atomizes the cool lubricating fluid into fine mist. This dynamic process rapidly absorbs the heat of compression from the first stage and pre-cools the air entering the second stage prior to compression, drastically reducing power costs.

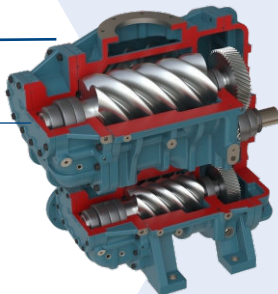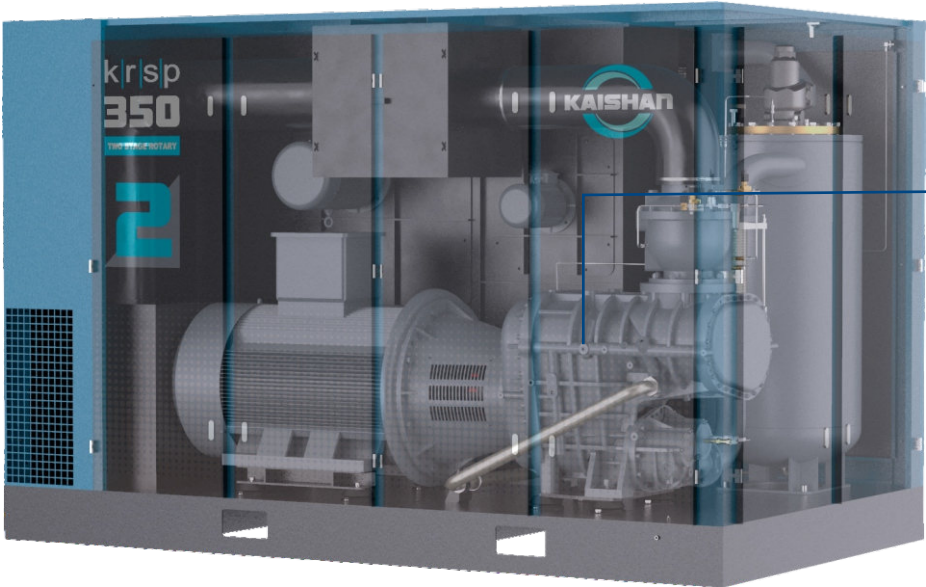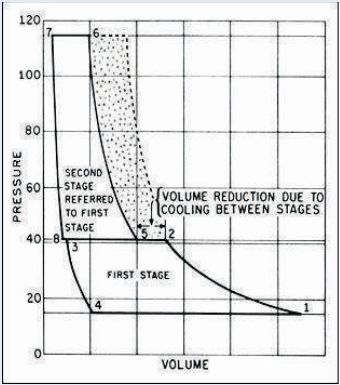

"SKY" SERIES AIR END
Maximum Output with
Less Energy Usage





TRIPLE DISCHARGE BEARINGS

Longer bearing life / Quieter Operation
The "SKY2" series airend uses three discharge bearings on the first stage and four bearings on the second stage.

Division of Compression Ratio

In a single stage compressor operating at 100 psig at sea level, the compression ratio is 7.8 to 1 (in absolute terms). A two-stage compressor operating at the same pressure will have a compression ratio of 2.8 to 1 in each stage (2.8 is the square root of 7.8) achieving the compressor's power savings.

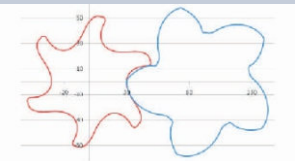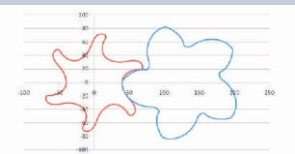

- Apart from energy saving these series have following advantages:
- 1. Internal leakage losses are reduced - Reduced pressure difference across each stage facilitates reduction in leakage loss.
 - 2. Extended bearing life - By dividing the compression ratio across two stages, the two-stage will significantly exceed the life of the average single-stage compressor. Bearing loads are reduced to 1/3 of single stage

KRSP- 2 SERIES TWO STAGE SCREW AIR COMPRESSOR

Model No	Pressure Bar	Flow cfm	Power kW	Discharge Connection	Dimension mm	Weight kg
KRSP2-75	6	609	75	DN 65	2660x1630x1890	3300
	7	581				
	8	539				
	10	504				
	13	457				
KRSP2-90	6	798	90	DN 65	2660x1630x1890	3600
	7	742				
	8	709				3280
	10	607				
	13	566				
KRSP2-110	6	940	110	DN 80	3225x1865x2070	4030
	7	884				
	8	847				
	10	740				
	13	659				
KRSP2-132	6	1222	132	DN 80	3225x1865x2070	4720
	7	1051				
	8	990				4100
	10	881				
	13	789				
KRSP2-160	6	1415	160	DN 100	3560x1910x2320	4900
	7	1361				
	8	1276				4250
	10	1048				
	13	933				
KRSP2-185	6	1683	185	DN 100	3560x1910x2320	5040
	7	1528				
	8	1480				4950
	10	1276				
	13	1109				
KRSP2-200	6	1781	200	DN 100	3560x1910x2320	5050
	7	1683				
	8	1603				5000
	10	1363				
	13	1273				
KRSP2-220	6	2078	220	DN 125	3745 X 2160 X 2380	6350
	7	1869				
	8	1765				5680
	10	1525				
	13	1361				
KRSP2-250	6	2220	250	DN 125	3745 X 2160 X 2380	6930
	7	2082				
	8	1952				6550
	10	1673				
	13	1521				

NOTE:- Capacity other than above please contact us for technical assistance.
Flow as per ISO 1217 Annexure C

LOW PRESSURE SINGLE STAGE ROTARY AIR COMPRESSOR


Design Pressure : 1.5 bar, 2 bar, 3 bar & 5 bar



Certain application in industry like **Textile, Cement, Glass, Flue-gas Desulfurization** and **Pneumatic Conveying** demands for 1.5 bar to 5.5 bar pressure. Here if we use standard 7 bar compressors then it will be oversized. For example 120 HP/7 bar air compressor delivers approximately 600 cfm where as 120 HP / 3 bar delivers approximately 1000 cfm.

So for these applications Kaishan have come-up with Kaitec "Low Pressure" Screw Air Compressor series.

With patented screw air end, variable internal compression ratio & oversized air oil separating system these compressors deliver high air volume with the lowest possible energy consumption.

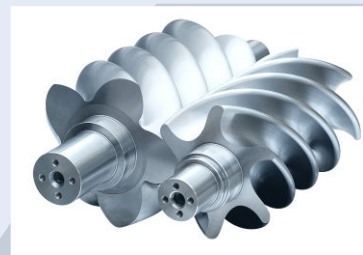


Patented Screw Rotors
5:6 SKY Profile
Excellent Reliability
5 years warranty against manufacturing defects

Patented Screw Air end
Automatically adjust the compression ratio according to pressure resulting the best specific power for (KW/CFM) 1.5 to 5 bar pressure range.



External Oil Pump for Forced Lubrication
Ensuring enough oil charge and the best oil air mixing ratio at very low pressure

Air-Oil Separating system
Specially designed over sized oil separator for 3 & 5 bar to ensure lowest oil carry over rate

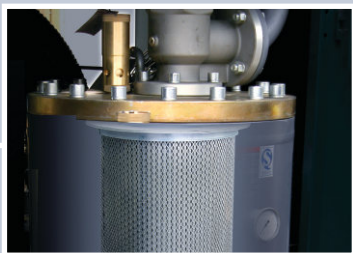

KRSA SERIES LOW PRESSURE SINGLE STAGE SCREW AIR COMPRESSOR

- Kaishan 3 bar Low Pressure Screw Air Compressors are specifically designed for **Textile, Cement, Glass, Fuel-Gas Desulfurization** and **Pneumatic Conveying** application.
- When a 7 bar standard air compressor is run for a plant air pressure requirement of 2 – 5 bar, it will lead to higher power consumption as compared to Kaishan Low pressure compressors. Kaishan low pressure screw air compressors with their patented low compression ratio can deliver same output flow (cfm) with 20 – 50 % lower power consumption.
- The Capacity of a screw air compressor with 132 kW motor at 7 bar will be 850 cfm. Kaishan Low pressure compressor with 132 kw motor at 3 bar will have a flow of 1547 cfm. This power saving enables you to recover your investment in less than a year.

Model No	Pressure Bar	Flow cfm	Power kW	Connection	Dimension mm	Weight kg
KRSP55-1.5 VSD	1.5	932	55	DN125	2960 X 2060 X 2260	4000
KRSP110-1.5 VSD	1.5	1681	110	DN250	4100 X 2140 X 2370	6680
KRSP75-2 VSD	2	932	75	DN125	2960 X 2060 X 2260	4200
KRSP90-2 VSD	2	1095	90	DN125	2960 X 2060 X 2260	4300
KRSP132-2 VSD	2	1677	132	DN250	4100 X 2140 X 2370	7150
KRSP160-2 VSD	2	2042	160	DN250	4100 X 2140 X 2370	7300
KRSA22-3	3	231	22	G2	1980 X 1260 X 1370	1260
KRSA37-3	3	378	37	DN65	1695 X 1050 X 1590	1770
KRSA55-3	3	622	55	DN80	2510 X 1560 X 1860	2070
KRSA55-3A	3	705	55	DN80	2510 X 1560 X 1860	2070
KRSP 90-3A	3	1074	90	DN125	2860 X 1760 X 2050	5800
KRSP132-3A	3	1639	132	DN150	3760 X 2060 X 2240	5600
KRSP160-3A	3	1868	160	DN150	3760 X 2060 X 2240	5600
KRSP250-3A	3	2825	250	DN250	4390 X 2200 X 2350	CF
KRSA30-5	5	261	30	G1 ½	1685 X 1000 X 1490	780
KRSA45-5	5	397	45	DN65	2450 X 1460 X 1580	2200
KRSA55-5	5	460	55			
KRSA75-5	5	655	75	DN80	2760 X 1630 X 1735	2430
KRSA90-5	5	765	90			2820
KRSA110-5	5	901	110	DN100	3160 X 1810 X 2080	3300
KRSA132-5	5	1122	132			4850
KRSA160-5	5	1369	160			4900

NOTE:- Capacity other than above please contact us for technical assistance.
Flow as per ISO 1217 Annexure C





OIL-FREE ROTARY SCREW COMPRESSORS (AIR-COOLED)

WORLD CLASS | EFFICIENCY | RELIABILITY



class zero
OIL-FREE ROTARY



CLASS 0 MEANS:


- ✓ Zero risk of contamination.
- ✓ Zero risk of damaged or unsafe products.
- ✓ Zero risk of losses from operational downtime.
- ✓ Zero risk of damaging your company's hard-won professional reputation.

With a Kaishan Oil Free rotary you have the peace of mind that only the highest purity of compressed air is reaching your products.



OIL FREE AIREND

- Integrated oil distribution lines
- Integrated motor adapter
- PTFE coating on compression chambers
- Seal design ensures zero oil in
- Integrated oil pump

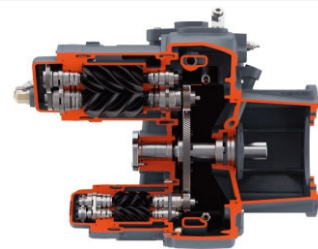

PRECOOLER / INTERCOOLER

- Precooler reduces thermal stress load
- Highly efficient robust 2 stage cooling
- Approach temperatures under 15 degree



HYDRAULICALLY CONTROLLED INLET VALVE

- Quicker response to system changes
- Lower starting inrush current
- Control independent of operating pressure
- Reliable, robust design



SCREW AIR COMPRESSOR

100% OIL FREE RECIP AIR COMPRESSOR



Chicago Pneumatic (CP) is a global leader in the design, manufacture and distribution of high-performance compressors. We generate added value by delivering the best solution to meet your needs based on our decades of experience.

Today, CP is a global brand that offers products for countless applications and almost every industry. We are also proud to say that after all these years, CP still stands for reliability, durability and customer value.

100 % Oil Free Reciprocating Air Compressor

Silent Canopy version Air Cooled

- Foundation free design with AVM pad
- Premium efficient IE3 Motor
- ICONS : Always connected online mobile monitoring
- Option of inbuilt VFD

Capacity : 158 CFM to 524 CFM

Pressure : 7 Bar and 10 Bar



Water Cooled Recip Air Compressor

- Foundation free design with AVM pad
- Premium efficient IE3 Motor
- ICONS : Always connected online mobile monitoring
- Advanced 5th generation Microprocessor control

Capacity : 42 CFM to 1610 CFM

Pressure : 2.5 - 4 - 7 - 10 - 12 - 15 Bar



Tank Mounted Rotary Screw Air Compressor

The ultimate all in one solution

- Compact design
- No inter connecting piping required

Capacity : 8 CFM to 130 CFM

Pressure : 7 - 8 - 10 - 13 - 15 Bar



Floor Mounted Rotary Screw Air Compressor

- High Volumetric Efficiency
- Premium Performance Air End
- Optimise Cooler Design
- High performance and reduced energy consumption
- Low maintenance cost

Capacity : 142 CFM to 1600 CFM

Pressure : 7 - 8.5 - 10 - 13 - 15 Bar





BENEFITS OF VSD MACHINES V/S FIXED SPEED MACHINES

Typical compressor life cycle cost model

The VSD Drive in compressor controls the motor's rotation speed in order to consume the energy needed to produce the compressed air required by application.

- VSD saves up to 30% power in some cases resulting in very lucrative payback.
- Eliminates unloading power to almost 0%
- Ensure constant pressure ± 0.1 Bar, in terms it saves power.
- Ensure constant power factor.
- Increase life of consumables.
- Reduce wear and tear, which increases life of compressor.
- Improve the life of pneumatic components.

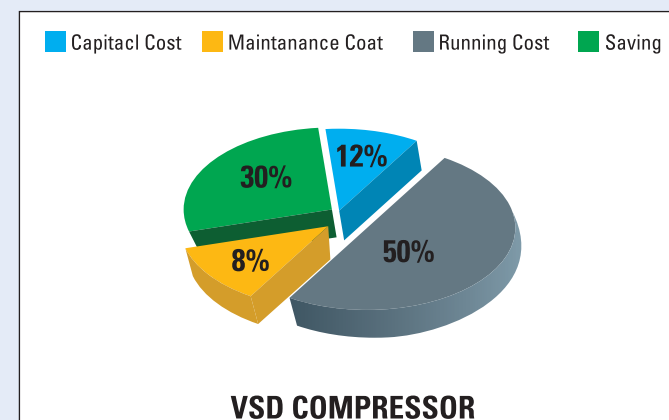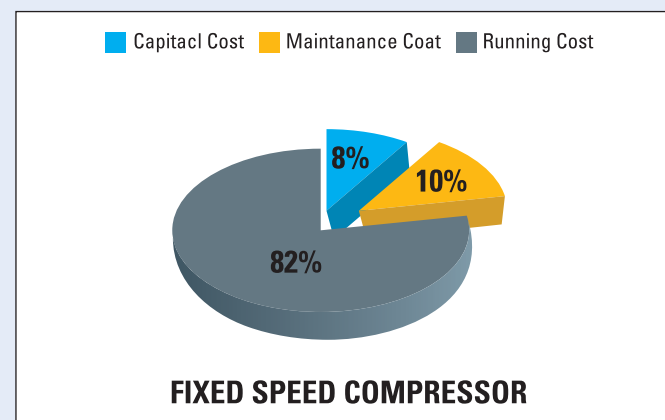

AIR COMPRESSOR PERFORMANCE COMPARISON

(Fixed Speed v/s With Variable Speed Compressor) Installed Capacity : 525 CFM

Manufacturer	Fixed Speed	VSD	Fixed Speed	VSD	Fixed Speed	VSD
Required Capacity in CFM	500	500	400	400	300	300
Installed capacity in CFM	525	525	525	525	525	525
Sp. Power in kw/cfm	0.1800	0.1836	0.1800	0.1836	0.1800	0.1836
Loading Hours per annum of 8000 hrs	7,619	7,619	6,095	6,095	4,571	4,571
Unloading Hours per annum of 8000 hrs	381	-	1,905	-	3,429	-
Power Consumption for loading cycle in unit per year	720,000	734,400	576,000	587,520	432,000	440,640
Power Consumption for unloading cycle in unit per year	10,800	-	54,000	-	97,200	-
Total Power Consumption in unit	730,800	699,429	630,000	587,520	529,200	440,640
Total Power cost / annum	5,115,600	5,140,800	4,410,000	4,112,640	3,704,400	3,084,480
Actual Power Consumption per cfm	0.183	0.184	0.197	0.184	0.221	0.184
Saving by Using VSD Compressor (INR)	(25,200)		279,360		619,920	
Running Cost Considering 10 Years Life (INR)	(252,000)		2,973,600		6,199,200	

Above figures are for reference only, It may be varying machine to machine.

COMPLETE AIR PIPING SOLUTION

AIRNET
COMPRESSED AIR • VACUUM • NITROGEN



Your production deserves an optimal air piping system


To achieve the lowest total cost of ownership AIRnet Offers

- High Quality Materials
- High Energy Efficiency
- Optimal Operational Performance
- Low Operational Costs
- Low Installation Costs
- Low Modification Costs
- Safety

Optimized production, maximized energy efficiency and minimized total cost



30% energy saving
than any conventional piping system

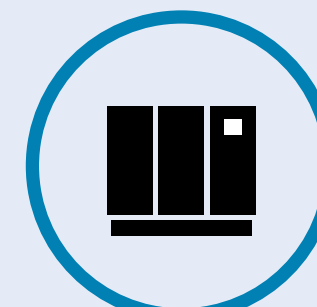

From supply to point of use

NO maintenance



NO corrosion

7 times lighter

70% faster to install

100% reusable modular design

IMPRESSIVE energy saving

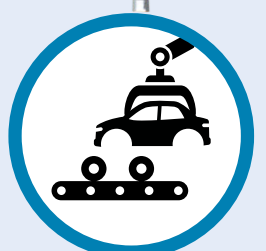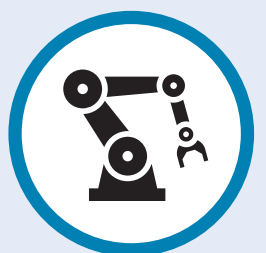

FILTRATION & SEPARATION

AUTO DRAIN VALVE



Media : Compressed Air
Port Size : 1/2" & 1" Female
Working Pressure : Upto 16 Bar

WATER / MOISTURE SEPARATOR

Centrifugal technology for condensed water and liquid oil removal
End Connection / Port Size : G 1/4" to 4"
Pressure / Temp° : Up to 16 Bar/Upto 80°C
Body Material : Cast Aluminium



MICRO FILTER FOR COMPRESSED AIR

Coalescing / Particulate Filter, Oil Remover Filter
Port Size : G 1/4" to 3"
Micron : 1µ & 0.01µ
Capacity : 21 to 1314 CFM
Working Pressure : Upto 16 Bar



LIQUID & GAS FILTERS

Working Pressure : Up to 350 Bar
Temperature : Up to 315°C
Housing : SS316, CS, Aluminum, PP
Available in various Micron Rating

Air Receiver Tank

Media : Compressed Air & Nitrogen
Capacity : 500 Ltr. to 20000 Ltr.
MOC : MS, CS, SS, GI
Code of Construction : ASME, Div. VIII & ISO
Type : Vertical & Horizontal



NEW PRODUT FOR BETTER TOMORROW



World Class Japanese Air Compressor

- Enhanced Air Out put
- Low Noise & Vibration
- Low Oil Carryover in air out put
- Quadra Edge Technology

RECIPROCATING AIR COMPRESSOR



Gajjar Air Compressor



- 100% Continuous Duty Even for the Toughest Application
- Durable Cast Iron Construction
- Precision Engineered Quality Components
- High Pressure up to 40 Bar Available
- Capacity : 9 to 114 Cfm
- Power : 3hp To 20 hp
- Pressure : 2 to 40 Bar
- More then 3000 Installation in surat



100% Oil Free Air Compressor (Oil Less)



ANEST IWATA, Japan (Leader in oil free technology in the world) with its newest offering in oil free technology has brought in India its class zero products where no oil is used in entire compression process.

- Patented composite Resin piston
- No risk of seizure
- Air - Cooled design
- Heavy duty operation
- Capacity : 3 to 114 Cfm
- Power : 0.5 to 30 hp
- Pressure : 8.5 Bar



Scroll Air Compressor



- Compact Package Including Compressor, Receiver Tank
- The Most Silent Compressor

■ **Major Application** : Pharma, Breathing Air, Diamond, Sorting, Hospital CNC Machine, Instrument Air, R & D, Laboratories, Food, Printing Machine & Large Scale Painting.



Refrigeration Air Dryers

- Large condenser for high ambient temperatures
- Anti-recycle feature for compressor protection
- Dew Point : +3°C to +7°C PDP
- Low pressure drop across advanced heat exchanger saves energy
- Dryer quality class - ISO 8573 - 1 : 2010 (E) class -4

Heatless Air Dryers

- Compact Modular Design,
- Aluminum Construction
- Dew Point : Upto -40°C PDP
- Purge Economiser - Reduces purge loss and energy according to load requirements.
- Saves Energy by switching to Dewpoint based instead of fix time Regeneration cycle
- Consistent Dew Point Performance



Product at Glance



Onsite Oxygen Generator



Nitrogen Generator



Air Filtration



Auto Drain Valve

Breathable Air

Our bodies have a limited capacity to filter the air we breath. Anything much smaller than 10µm will travel past the nose and into the lungs. When contaminants reach the lungs, respiratory illness can occur, but when they hit the bloodstream they can be deadly.



**Comply all International Breathing Standard like:
OSHA, GRADE D, NFPA 99,
EUROPEAN PHARMACOPOEIA**

High quality air is of vital importance to many industries but even more so in breathing air applications. Trident Breathing air dryer system are designed to offer protection against a range of contaminants that may be present in a compressed air fed breathing air system. These include fumes, oil, vapors, gases, solid particles and micro organisms.

Features :

- Compact & Simple Design
- Purge saving & Dew point dependent control system
- Compact digital co & Dewpoint Monitor /Alarm
- Bacterial penetration up to 0.000%

Application :

- Short-blasting
- Tank cleaning
- Pharmaceutical Manufacturing
- Spray painting
- Offshore / marine
- Asbestos removal
- Packing Area

Complete package skid mounted with Heatless Air Dryer, Five stage filtration, internal copper piping, CO and Dew Point monitoring / alarm system.



WORLD'S MOST ENERGY EFFICIENT AIR DRYER FROM PARKER

Refrigerated Air Dryer

Every manufacturing organisation strives to improve its operational efficiency, especially in terms of energy consumption and environmental impact.

Product Features:

- All in one Aluminum Heat Exchanger (Smart Pack)
- Lowest Pressure Drop & low Absorbed Power
- Lower operating cost
- Remote communication protocol, Industry 4.0 ready
- Energy savings feature enables the dryer to save energy at partial load
- New R513A low GWP refrigerant – F-Gas regulation compliance, Protect the environment



Heatless Adsorption Air Dryer

PNEUDRI Modular Compressed Air Dryers - a dedicated solution for every application

By combining the proven benefits of desiccant drying with modern design, Parker domnick hunter has produced an extremely compact and reliable system to totally dry and clean compressed air.



Benefits:

- Highest quality air
- Energy efficient
- Dry air eliminates microbiological growth
- Modular & Compact design
- Approvals to international standards

Vacuum Assisted Low Energy Heatless Adsorption Dryers
Low Purge Loss Heatless Dryer (1.5 % to 4 %)



Membrane Air Dryer

FEATURES & BENEFITS

- No Electricity Required: Lower Operating Costs
- Dewpoint: As low as -40°C
- Silent Operation, Explosion Proof
- No Moving Parts: Low Operation & Maintenance Cost

Application: Dry air for hazardous area, General Lab. Air supply, prevent Electrical panel components from moisture damage, Analytical instruments



GAS GENERATION SYSTEM FOR LAB & INDUSTRIAL APPLICATION

PSA Nitrogen Gas Generator

Parker NITROSource PSA Nitrogen Gas Generator's unique design and advanced energy saving technology at its core, the market leading on-site generator which requires less compressed air to generate more nitrogen than other solutions.



Key Features:

- **Energy Saving Technology** matches compressed air flow to the nitrogen outlet flow
- Required less compressed air to generator more Nitrogen
- Modular design for expandability and compact footprint
- Easy to use control panel plus mass flow controller and economy stand-by mode
- Remote Monitoring
- Gas quality control system

Lab Gas Generator : Research Grade Purity

Parker provides on-site, on-demand gas supply solutions, and offers a comprehensive range of analytical and industrial gas generation systems. All Parker gas generators provide simple "plug and play" installation, efficiently enabling a continuous or on-demand supply of consistently pure gas.

Benefits :

- Eliminate gas cylinders from laboratory
- Improve instrument accuracy, sensitivity & performance
- Compact & Safe
- Cost Effective

Gas Generators:

Nitrogen Generator

Zero Air Generator

Hydrogen Generator

TOC Gas Generator

