


2.8 寸液晶彩条显示实验

1、实验目的:

通过 2.8 寸彩屏显示彩条

2、实验原理:

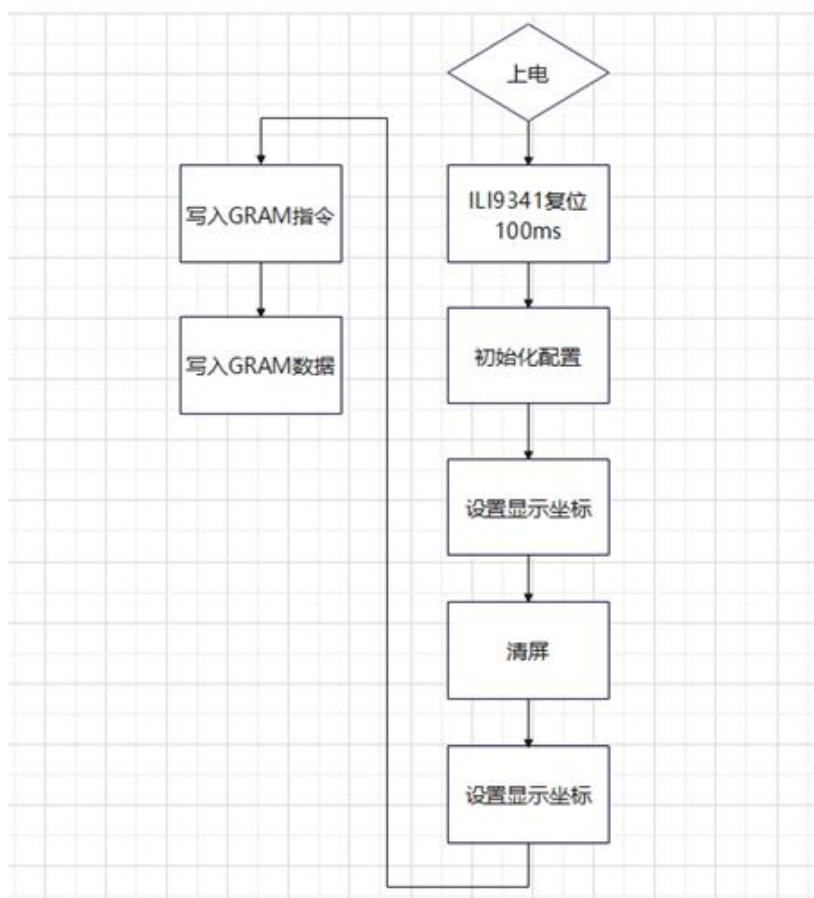

4、引脚锁定:

```
set_pin_assignment { clk } { LOCATION = R7; IOSTANDARD = LVCMOS33; PULLTYPE =  
PULLUP; }  
set_pin_assignment { reset_n } { LOCATION = A2; IOSTANDARD = LVCMOS33; PULLTYPE =  
PULLUP; }  
set_pin_assignment { tft_b1 } { LOCATION = M10; IOSTANDARD = LVCMOS33; DRIVESTRENGTH  
= 8; PULLTYPE = NONE; }
```

```
set_pin_assignment { tft_csx } { LOCATION = R14; IOSTANDARD = LVCMOS33;
DRIVESTRENGTH = 8; PULLTYPE = NONE; }
set_pin_assignment { tft_d_inout[0] } { LOCATION = P16; IOSTANDARD = LVCMOS33;
DRIVESTRENGTH = 8; PULLTYPE = PULLUP; }
set_pin_assignment { tft_d_inout[10] } { LOCATION = K15; IOSTANDARD = LVCMOS33;
DRIVESTRENGTH = 8; PULLTYPE = PULLUP; }
set_pin_assignment { tft_d_inout[11] } { LOCATION = G14; IOSTANDARD = LVCMOS33;
DRIVESTRENGTH = 8; PULLTYPE = PULLUP; }
set_pin_assignment { tft_d_inout[12] } { LOCATION = G16; IOSTANDARD = LVCMOS33;
DRIVESTRENGTH = 8; PULLTYPE = PULLUP; }
set_pin_assignment { tft_d_inout[13] } { LOCATION = F15; IOSTANDARD = LVCMOS33;
DRIVESTRENGTH = 8; PULLTYPE = PULLUP; }
set_pin_assignment { tft_d_inout[14] } { LOCATION = F14; IOSTANDARD = LVCMOS33;
DRIVESTRENGTH = 8; PULLTYPE = PULLUP; }
set_pin_assignment { tft_d_inout[15] } { LOCATION = E15; IOSTANDARD = LVCMOS33;
DRIVESTRENGTH = 8; PULLTYPE = PULLUP; }
set_pin_assignment { tft_d_inout[1] } { LOCATION = N14; IOSTANDARD = LVCMOS33;
DRIVESTRENGTH = 8; PULLTYPE = PULLUP; }
set_pin_assignment { tft_d_inout[2] } { LOCATION = N16; IOSTANDARD = LVCMOS33;
DRIVESTRENGTH = 8; PULLTYPE = PULLUP; }
set_pin_assignment { tft_d_inout[3] } { LOCATION = L16; IOSTANDARD = LVCMOS33;
DRIVESTRENGTH = 8; PULLTYPE = PULLUP; }
set_pin_assignment { tft_d_inout[4] } { LOCATION = M15; IOSTANDARD = LVCMOS33;
DRIVESTRENGTH = 8; PULLTYPE = PULLUP; }
set_pin_assignment { tft_d_inout[5] } { LOCATION = M16; IOSTANDARD = LVCMOS33;
DRIVESTRENGTH = 8; PULLTYPE = PULLUP; }
set_pin_assignment { tft_d_inout[6] } { LOCATION = K16; IOSTANDARD = LVCMOS33;
DRIVESTRENGTH = 8; PULLTYPE = PULLUP; }
set_pin_assignment { tft_d_inout[7] } { LOCATION = H16; IOSTANDARD = LVCMOS33;
DRIVESTRENGTH = 8; PULLTYPE = PULLUP; }
set_pin_assignment { tft_d_inout[8] } { LOCATION = H15; IOSTANDARD = LVCMOS33;
DRIVESTRENGTH = 8; PULLTYPE = PULLUP; }
set_pin_assignment { tft_d_inout[9] } { LOCATION = J16; IOSTANDARD = LVCMOS33;
DRIVESTRENGTH = 8; PULLTYPE = PULLUP; }
set_pin_assignment { tft_dcx } { LOCATION = T15; IOSTANDARD = LVCMOS33;
DRIVESTRENGTH = 8; PULLTYPE = NONE; }
set_pin_assignment { tft_rdx } { LOCATION = R16; IOSTANDARD = LVCMOS33;
DRIVESTRENGTH = 8; PULLTYPE = NONE; }
set_pin_assignment { tft_reset_n } { LOCATION = P15; IOSTANDARD = LVCMOS33;
DRIVESTRENGTH = 8; PULLTYPE = NONE; }
set_pin_assignment { tft_wrx } { LOCATION = R15; IOSTANDARD = LVCMOS33;
DRIVESTRENGTH = 8; PULLTYPE = NONE; }
```

5、下载验证

将扩展模块插在开发板 JP1 上，插好下载线，打开电源开关，下载程序至核心板内，此时屏幕上显示出彩条信号

