



Primary specifications of body, cab, accessories

1. Primary specifications of body, cab, accessories

Position	Lights		Bulb wattage
Front	LED headlight	High beam/low beam	LED
		Clearance light/day time running light (DRL)	LED
		Turn signal light	LED
	Halogen headlight	High beam/low beam	60/55 W
		Clearance light	5 W
		Turn signal light	21 W (Amber)
	Fog light	LED type	LED
		Bulb type	55 W
	Daytime running light (front bumper mounted type)		13 W
Side	Turn signal light	Outside rearview mirror mounted type	LED
		Front fender mounted type	5 W
Rear	Taillight and stop light	LED type	LED
		Bulb type	5/21 W
	Turn signal light	Standard type	21 W (Amber)
		Horizontal type	21 W
	Back up light		21 W
	License plate light		5 W
	Rear fog light		21 W
	High mounted stop light		LED
Interior	Map lights		8 W
	Dome light		10 W
	Vanity mirror light		LED

2. Body size

1. Vehicle body front part diagonal dimensions

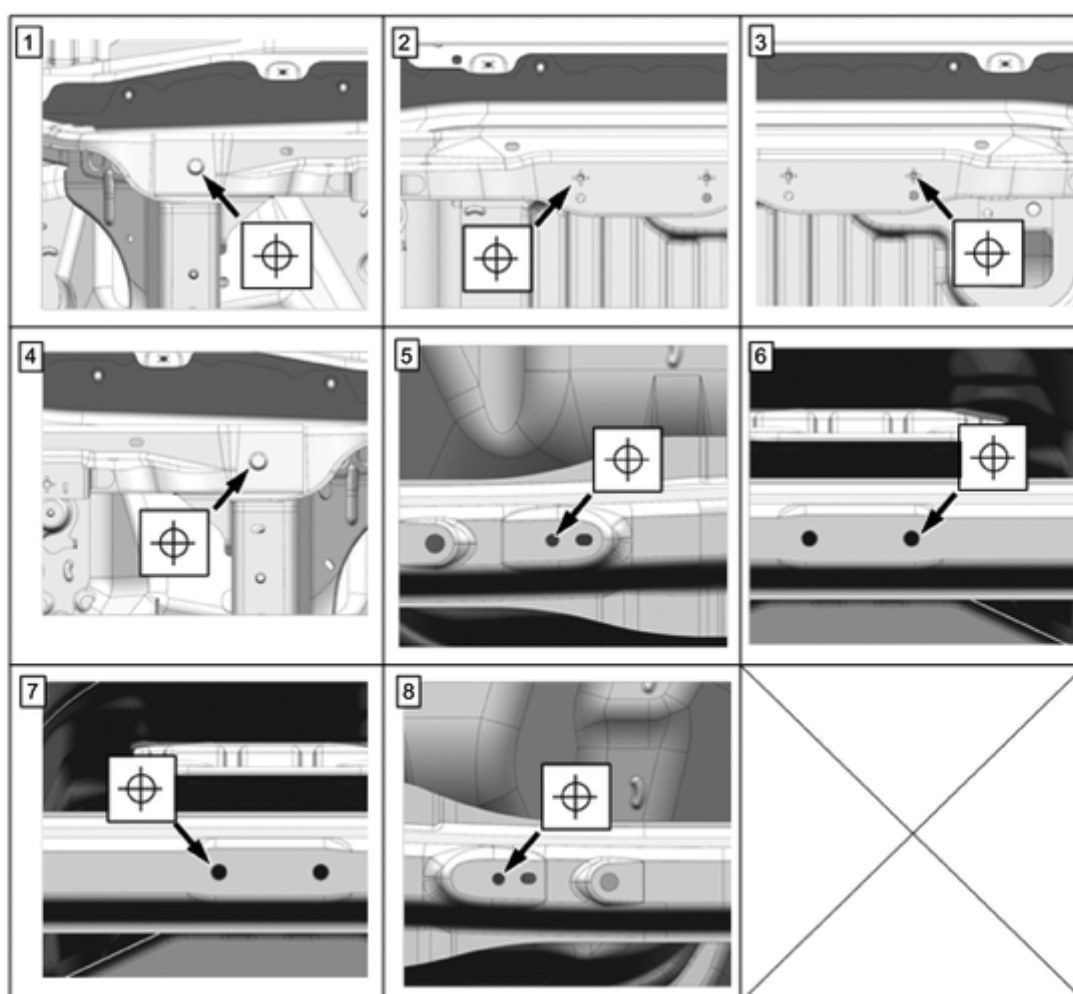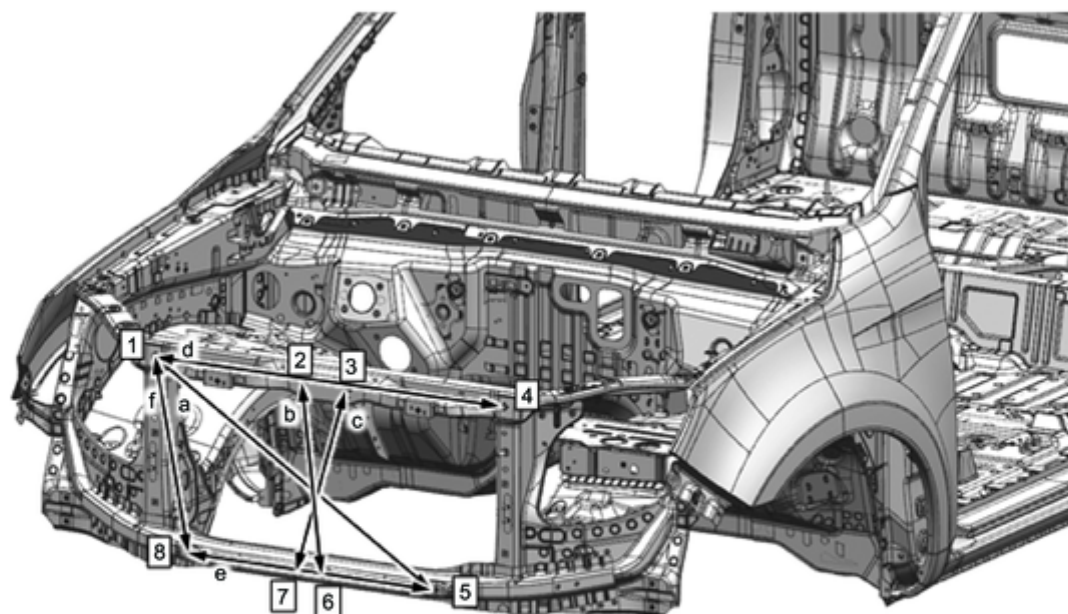

RTWL9GXF000401

Dimensions

a: 851 mm { 33.5 in }



b: 422 mm { 16.6 in }

c: 422 mm { 16.6 in }

d: 868 mm { 34.2 in }

e: 610 mm { 24.0 in }

f: 441 mm { 17.4 in }

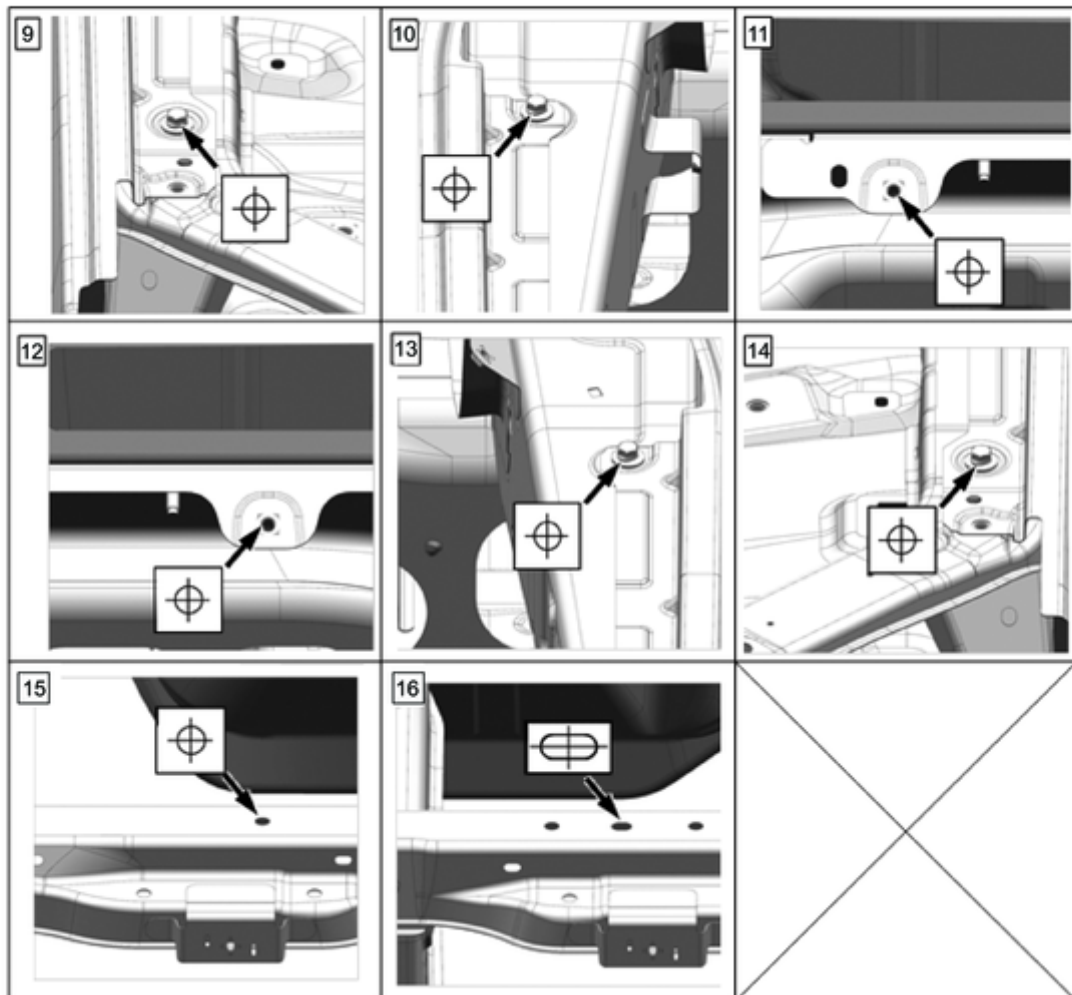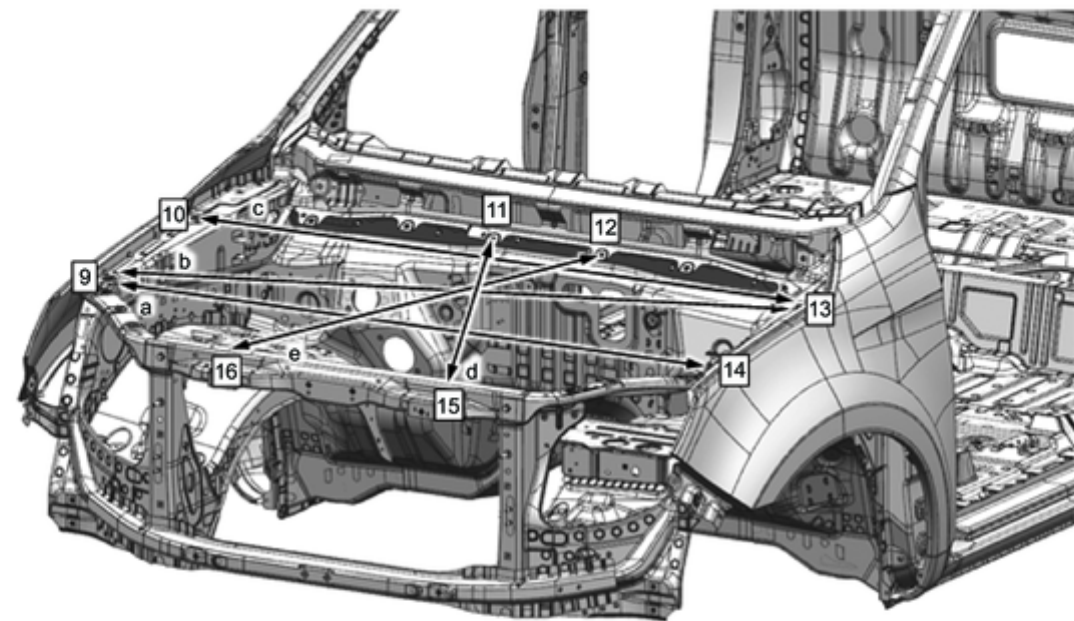

RTWL9GXF001301

Dimensions

a: 1,510 mm { 59.4 in }


b: 1,559 mm { 61.4 in }

c: 1,510 mm { 59.4 in }

d: 991 mm { 39.0 in }

e: 991 mm { 39.0 in }

2. Front window opening dimensions

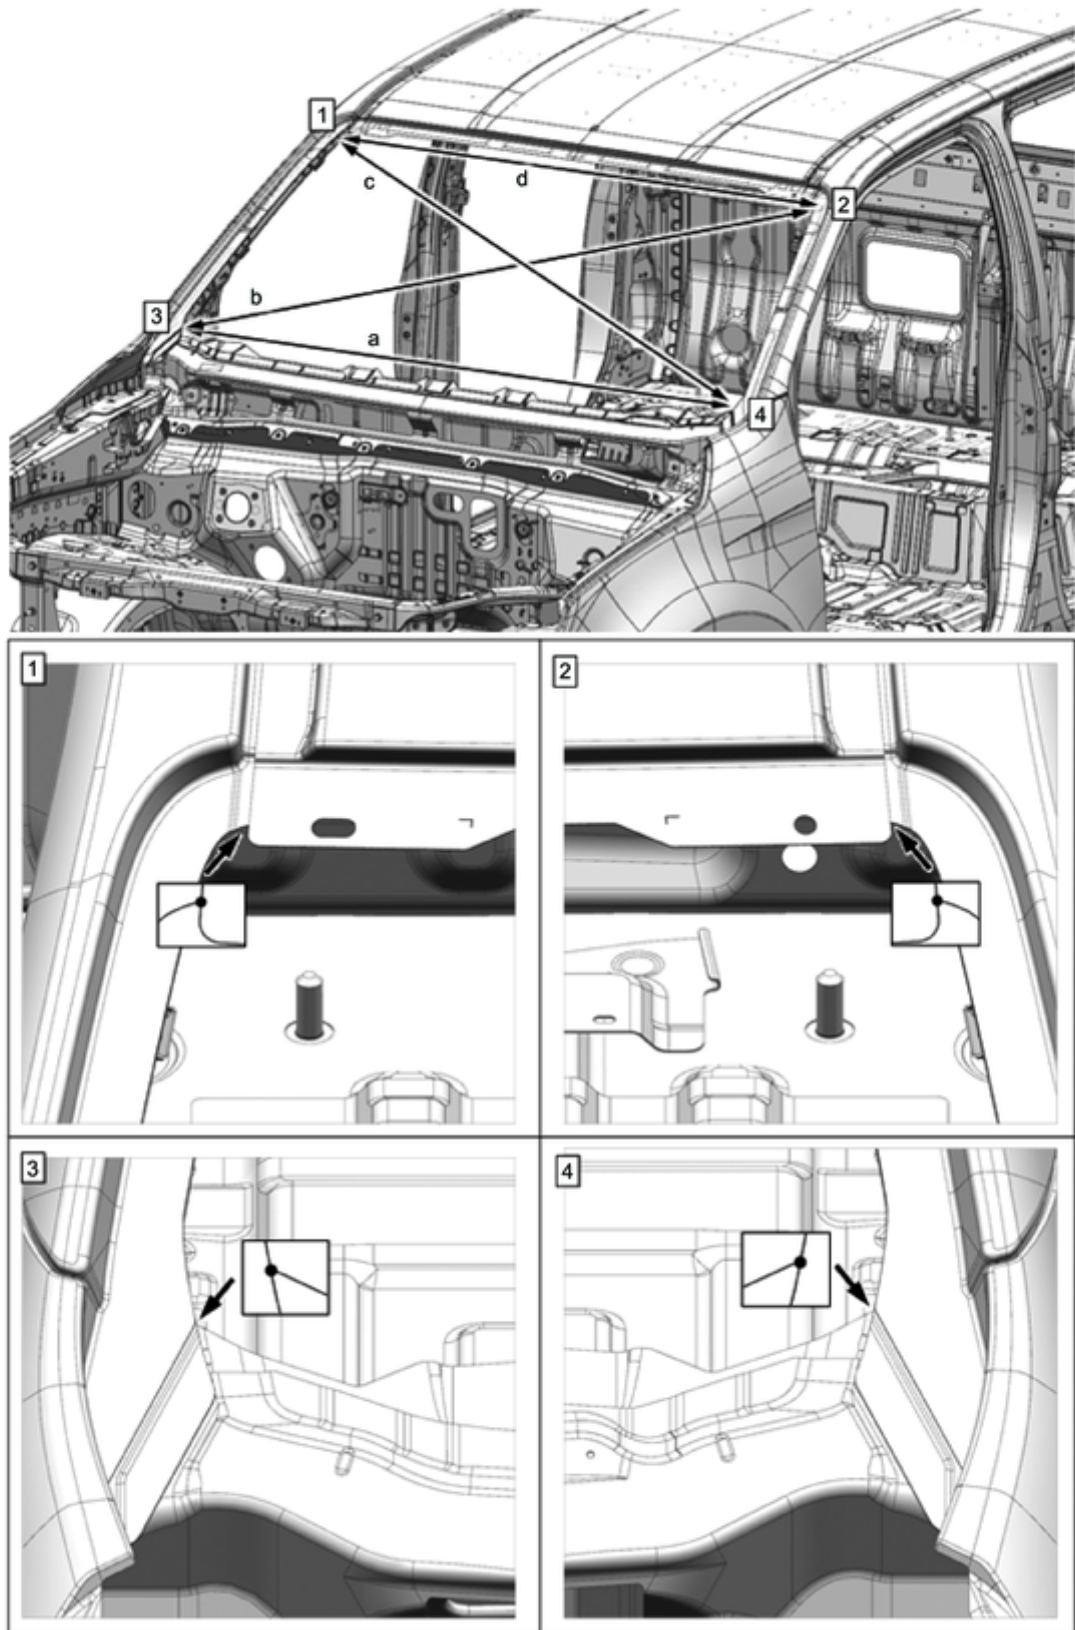

RTWL9GXF000601

Dimensions

a: 1,386 mm { 54.6 in }



b: 1,420 mm { 55.9 in }

c: 1,420 mm { 55.9 in }

d: 1,156 mm { 45.5 in }

3. Interior diagonal dimensions

Regular cab body dimensions

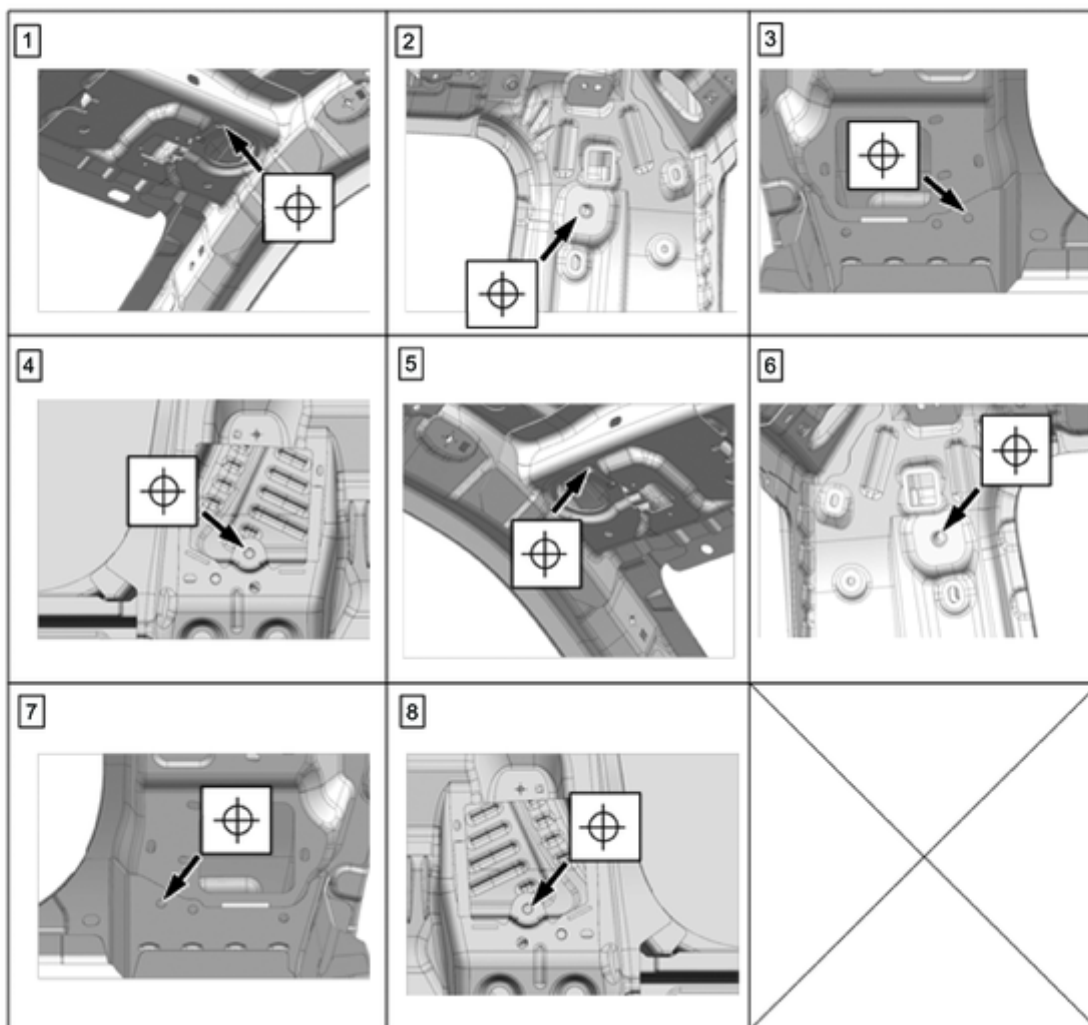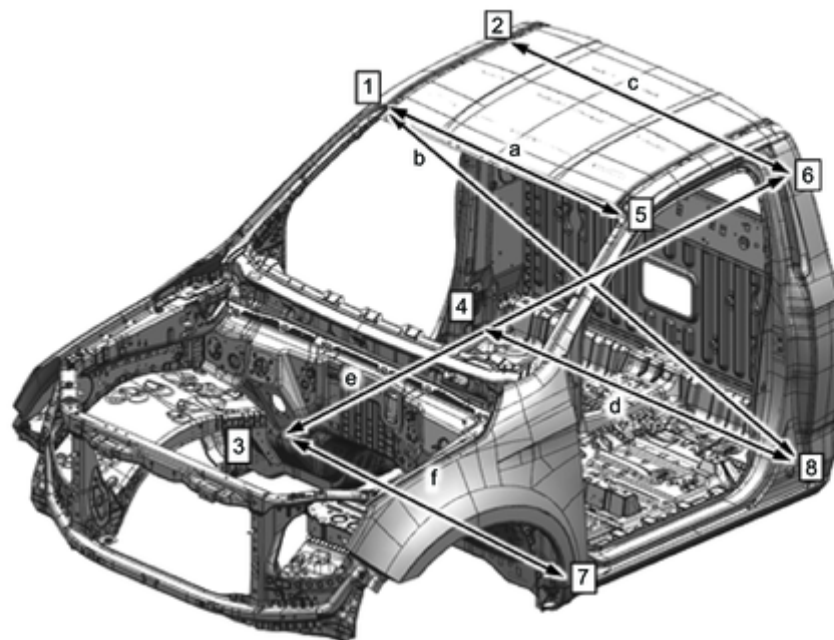

RTWL9GXF000701

Dimensions

a: 1,058 mm { 41.7 in }

b: 1,709 mm { 67.3 in }



c: 1,275 mm { 50.2 in }


d: 1,420 mm { 55.9 in }

e: 2,002 mm { 78.8 in }

f: 1,440 mm { 56.7 in }

Crew cab body dimension

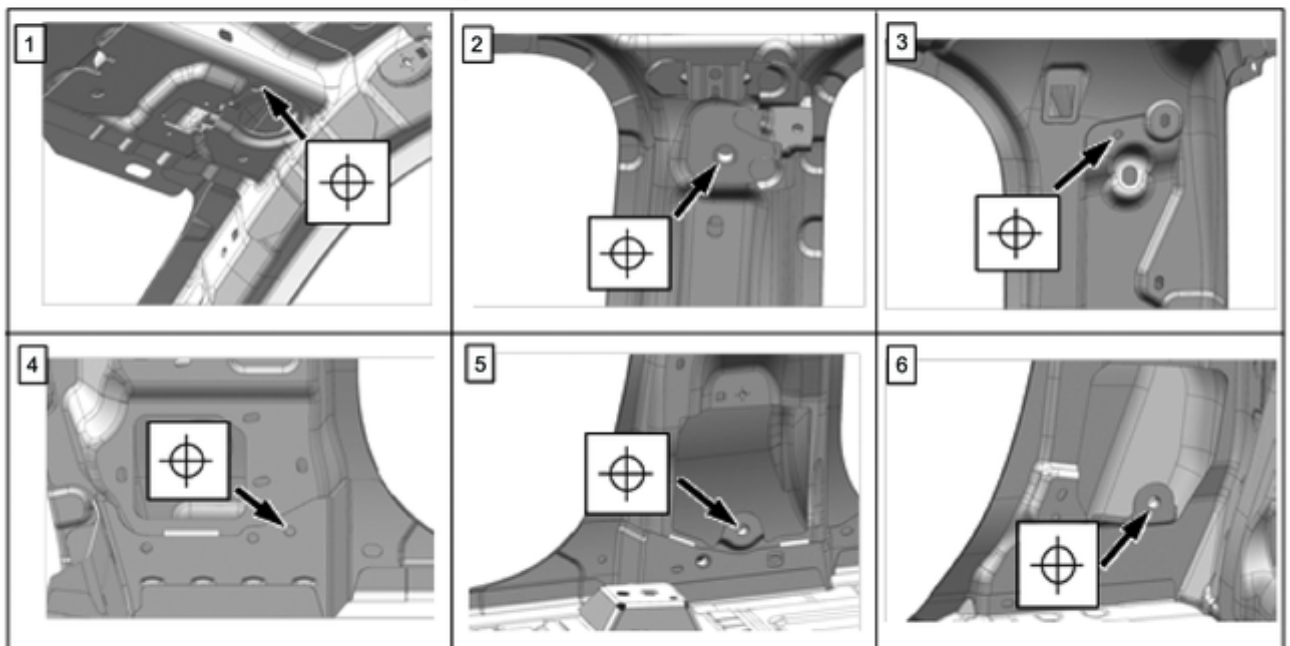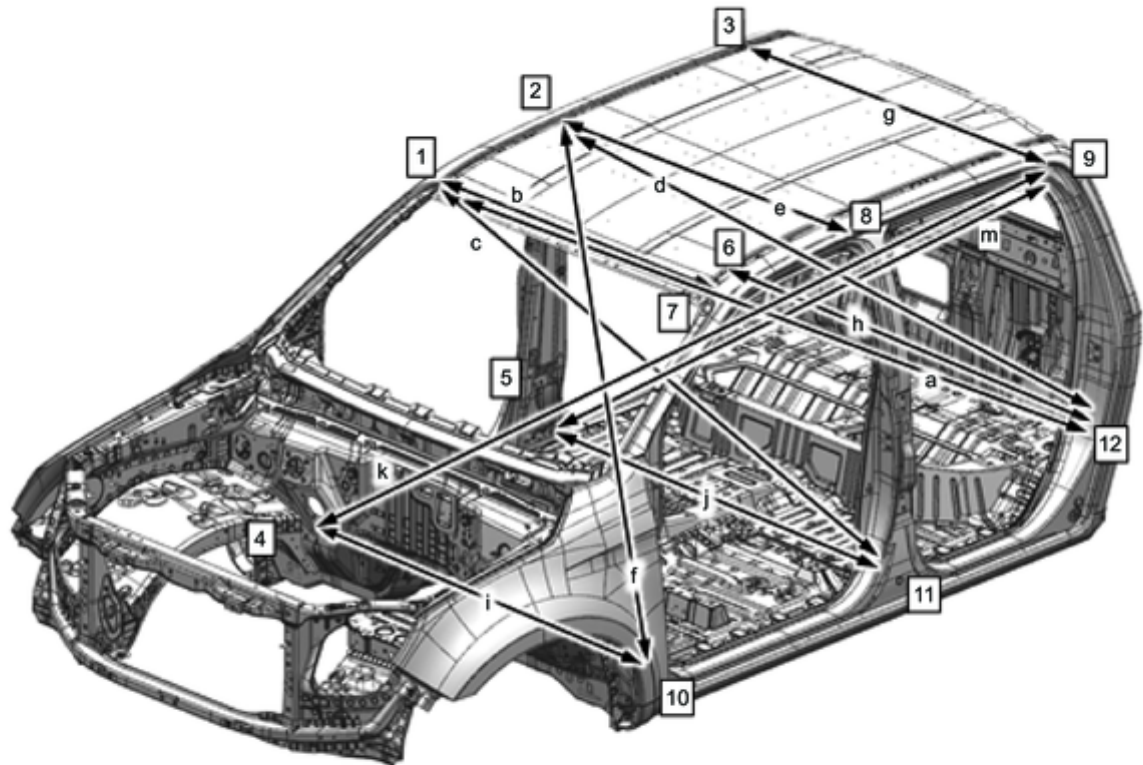


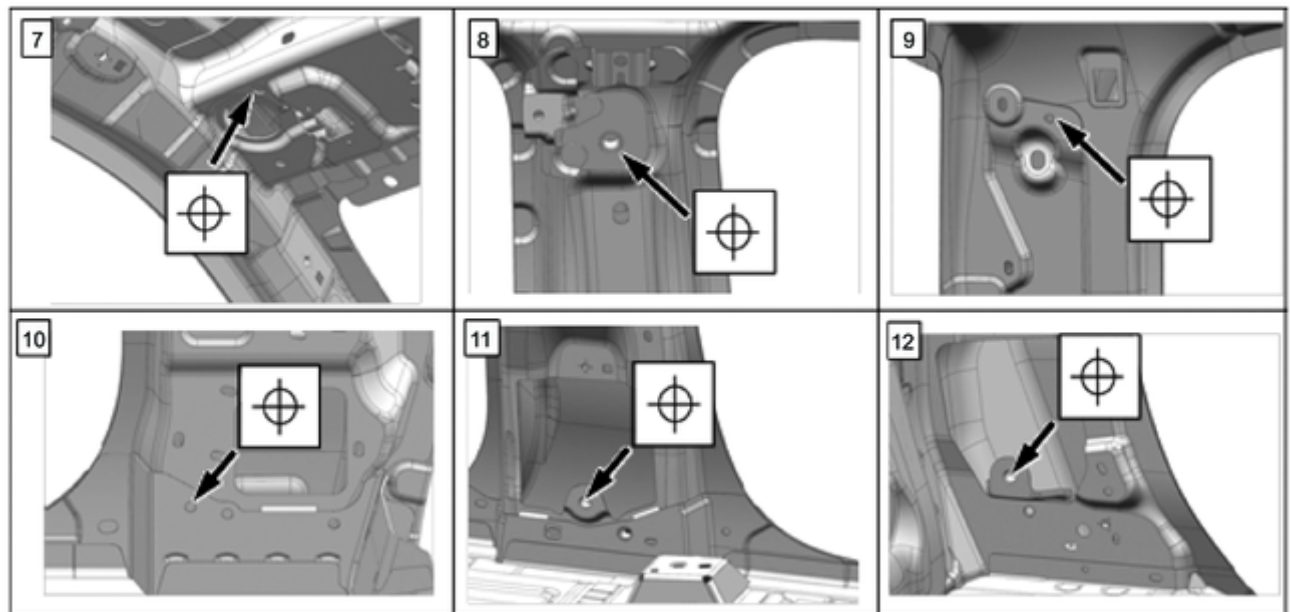


RTWL9GMF000101


Dimensions

- a: 2,059 mm { 81.1 in }
- b: 1,058 mm { 41.7 in }
- c: 1,709 mm { 67.3 in }
- d: 1,777 mm { 70.0 in }
- e: 1,275 mm { 50.2 in }
- f: 2,002 mm { 78.8 in }
- g: 1,282 mm { 50.5 in }
- h: 1,417 mm { 55.8 in }
- i: 1,441 mm { 56.7 in }
- j: 1,421 mm { 55.9 in }
- k: 2,556 mm { 100.6 in }
- m: 1,893 mm { 74.5 in }

Extend cab model body dimensions

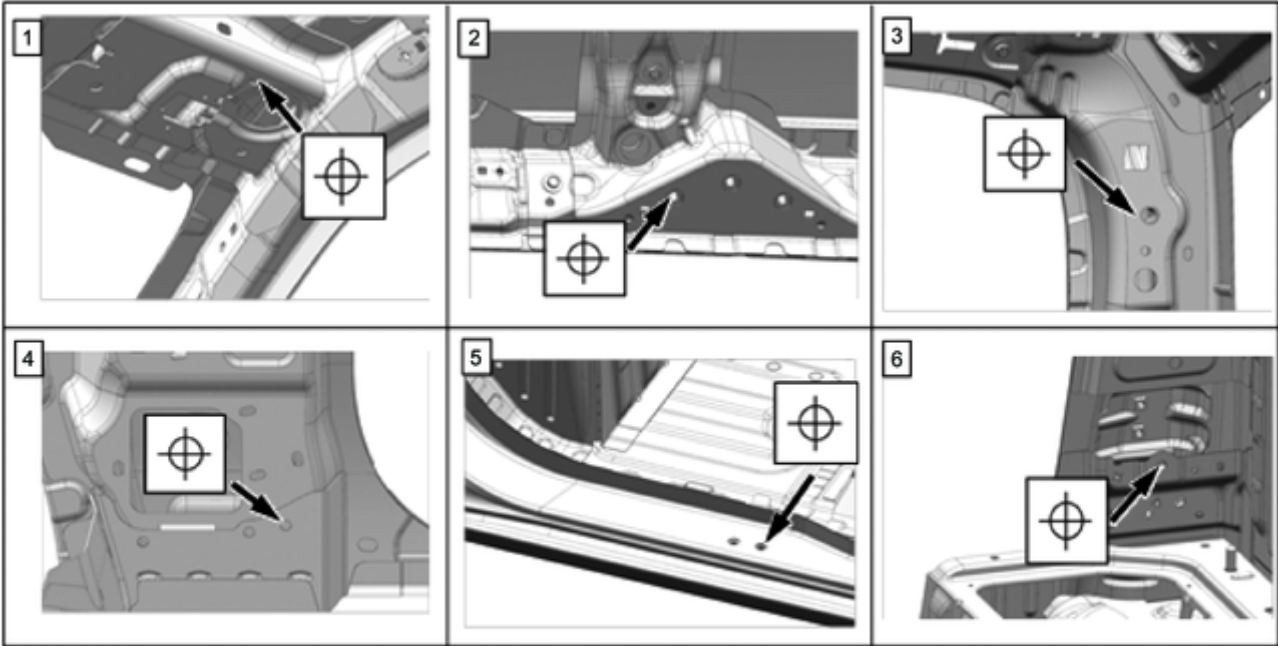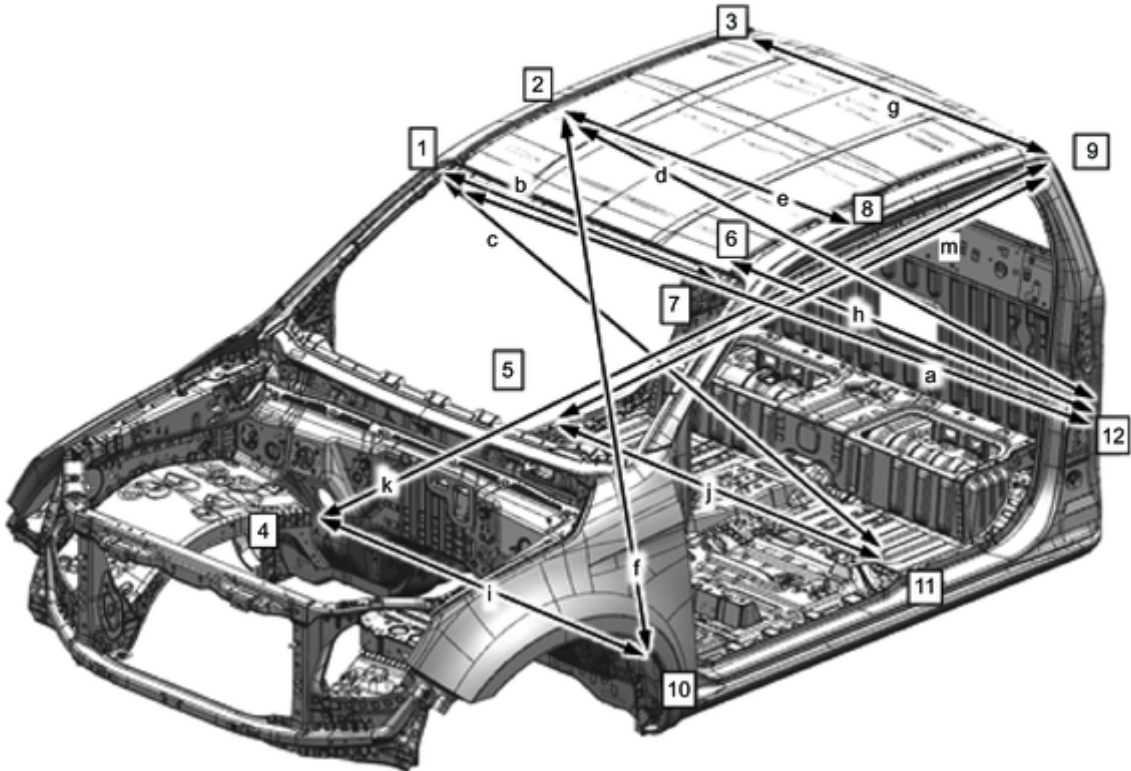

RTWL9GXF000901

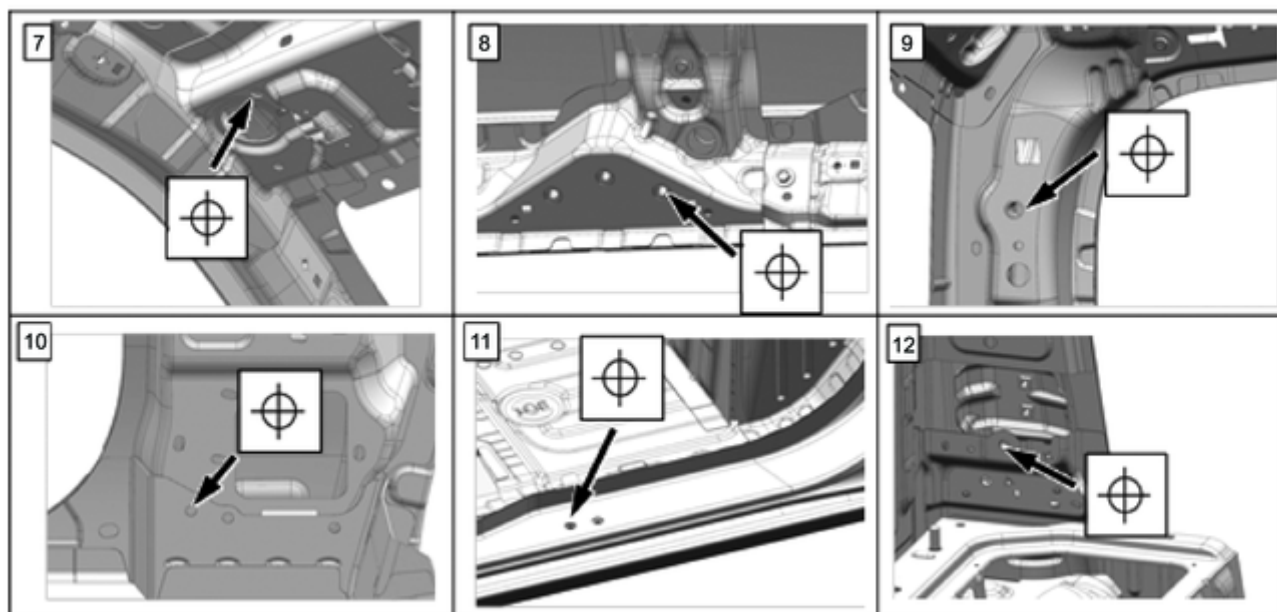

RTWL9GMF000201

Dimensions

a: 1,855 mm { 73.0 in }

b: 1,058 mm { 41.7 in }

c: 1,799 mm { 70.8 in }

d: 1,639 mm { 64.5 in }

e: 1,164 mm { 45.8 in }

f: 2,014 mm { 79.3 in }

g: 1,269 mm { 50.0 in }

h: 1,387 mm { 54.6 in }

i: 1,441 mm { 56.7 in }


j: 1,564 mm { 61.6 in }

k: 2,328 mm { 91.7 in }

m: 1,857 mm { 73.1 in }

4. Door opening dimensions

Regular cab body dimensions

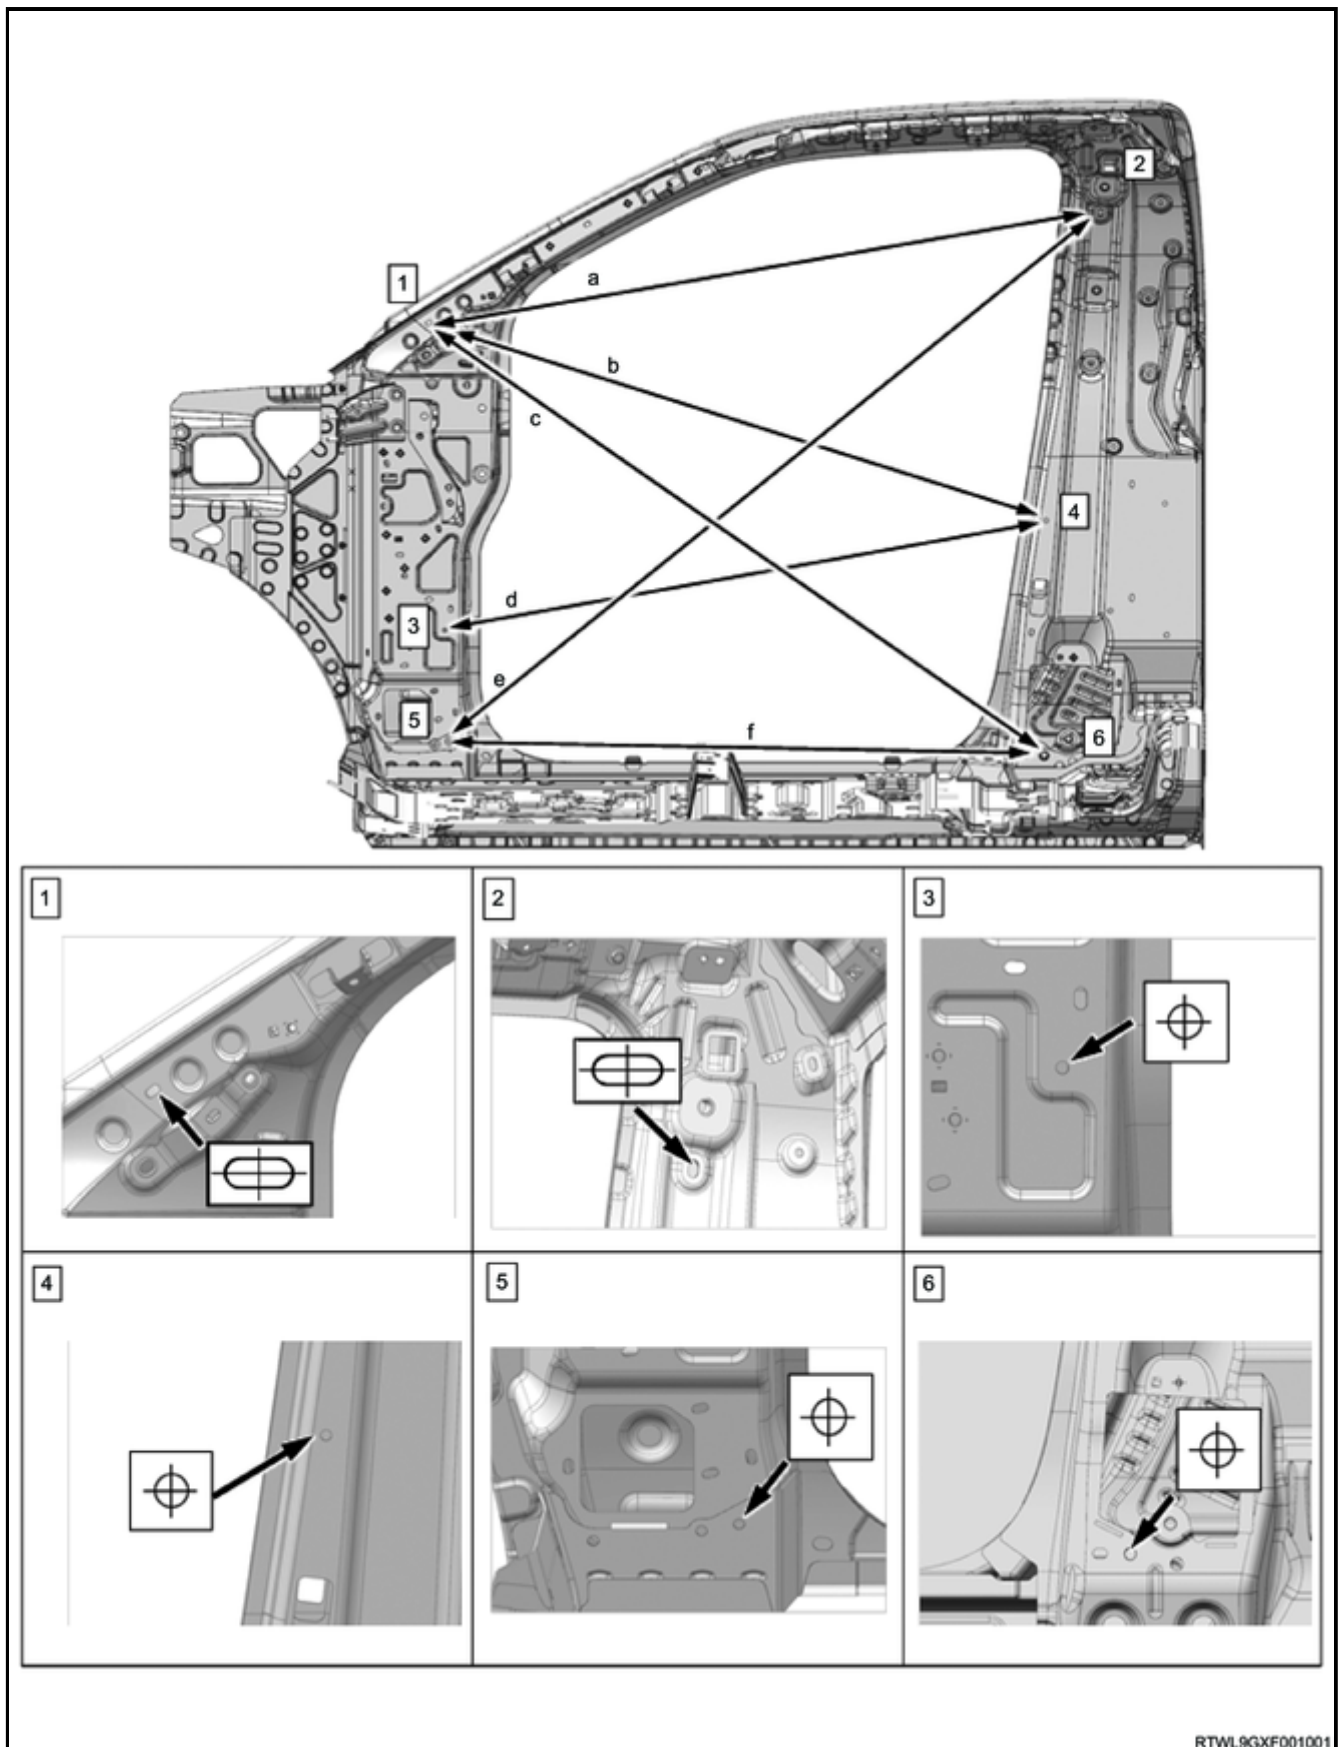

Dimensions

a: 1,138 mm { 44.8 in }

b: 1,085 mm { 42.7 in }


c: 1,277 mm { 50.3 in }


d: 1,020 mm { 40.2 in }

e: 1,435 mm { 56.5 in }

f: 988 mm { 38.9 in }

Crew cab body dimension

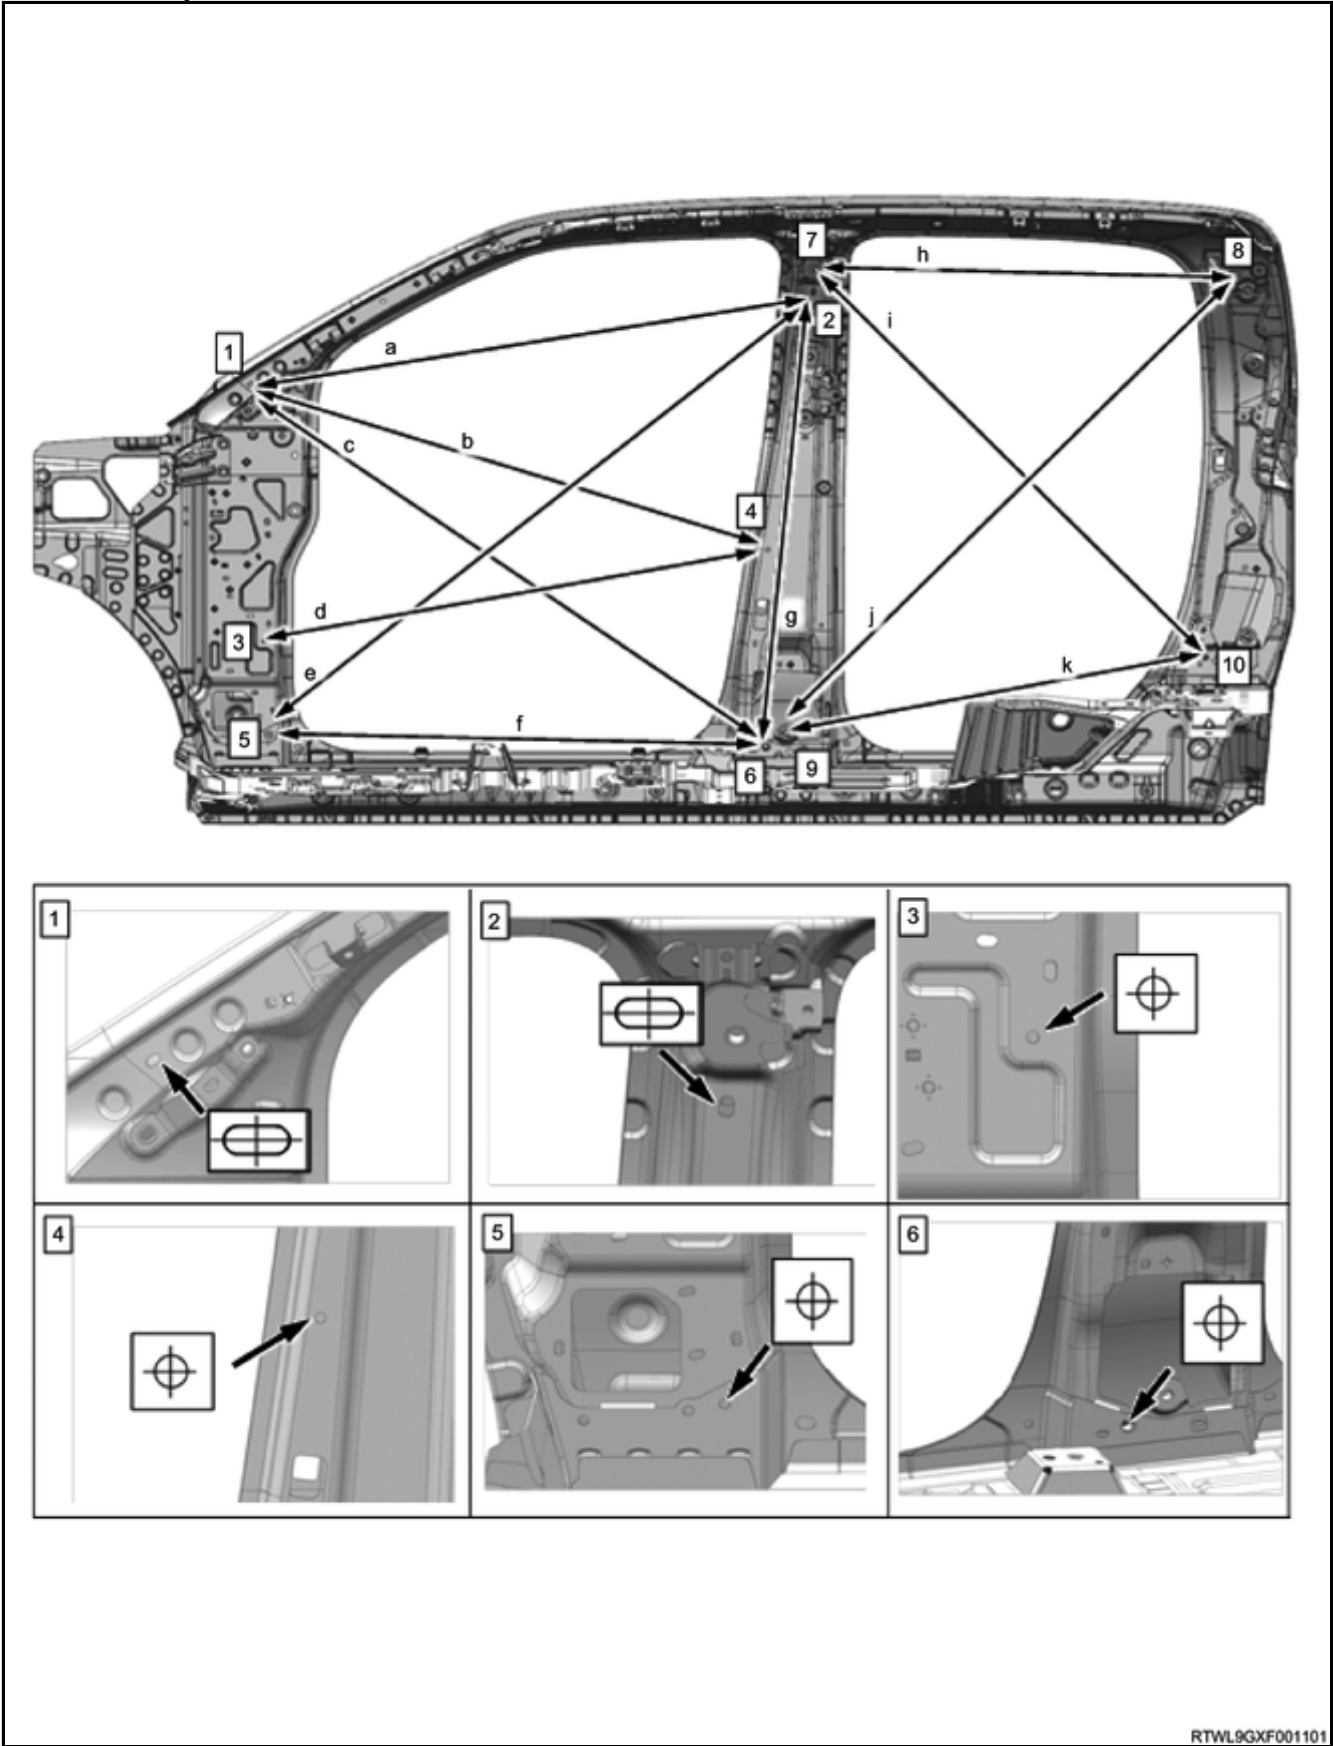

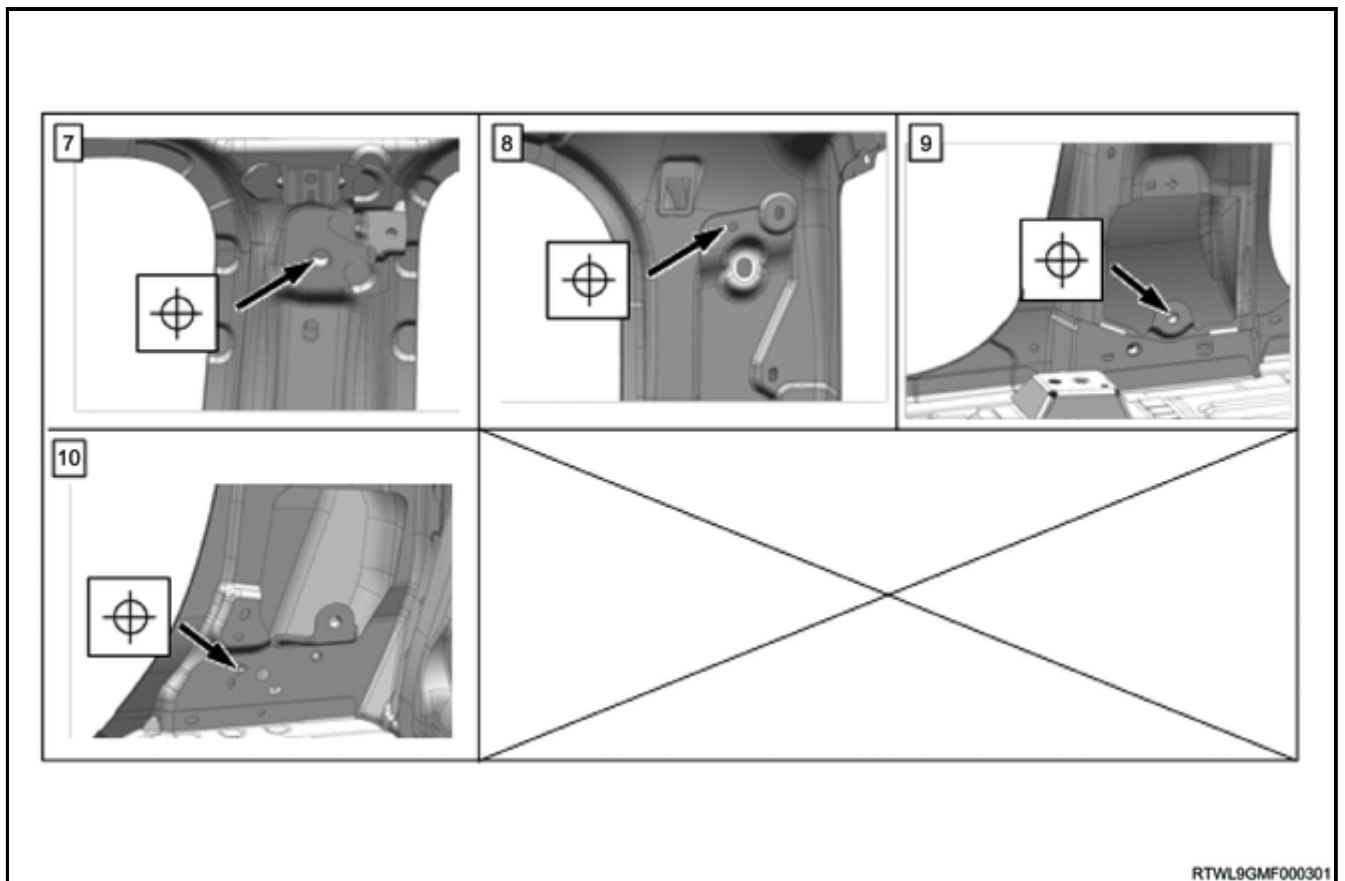

Dimensions

a: 1,138 mm { 44.8 in }

b: 1,085 mm { 42.7 in }

c: 1,277 mm { 50.3 in }

d: 1,020 mm { 40.2 in }

e: 1,435 mm { 56.5 in }

f: 988 mm { 38.9 in }

g: 971 mm { 38.2 in }



h: 840 mm { 33.1 in }

i: 1,135 mm { 44.7 in }

j: 1,328 mm { 52.3 in }

k: 846 mm { 33.3 in }

Extend cab model body dimensions

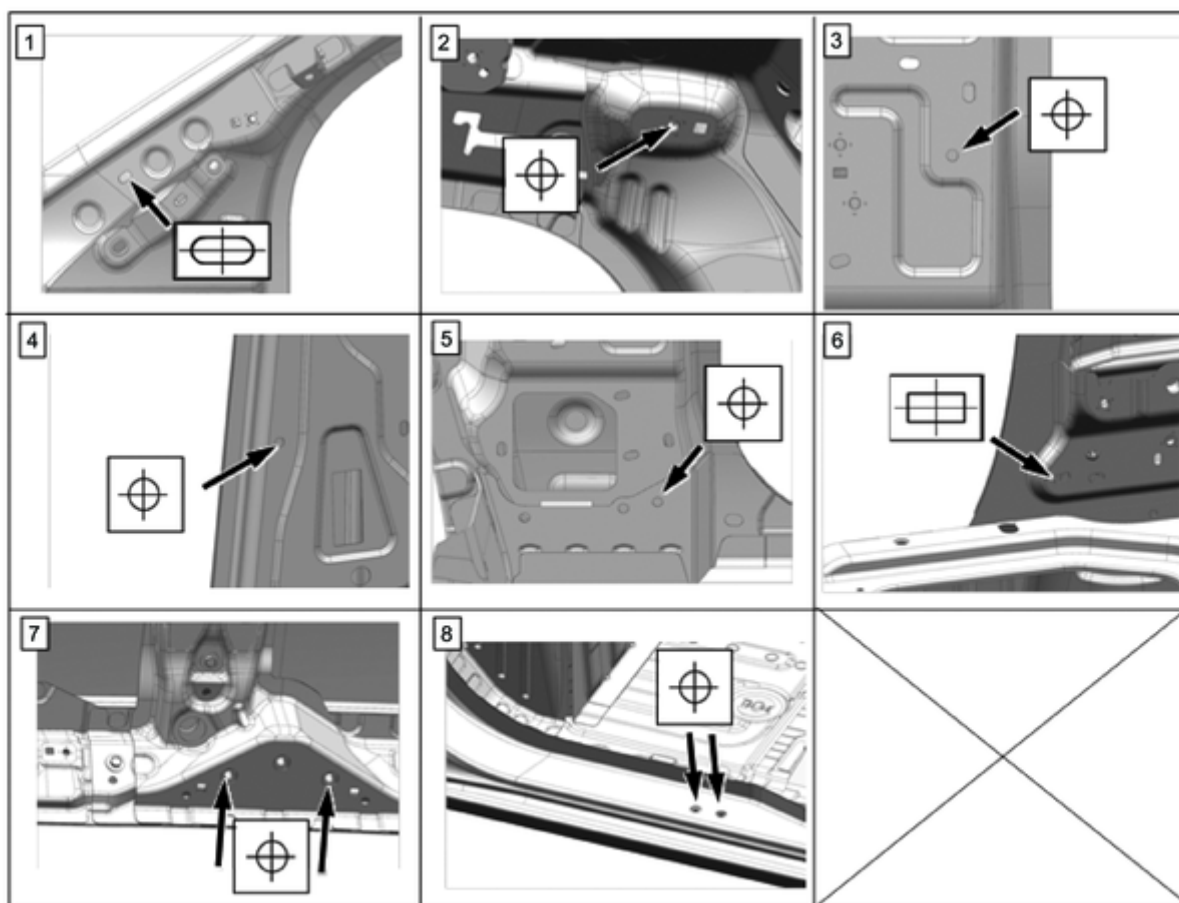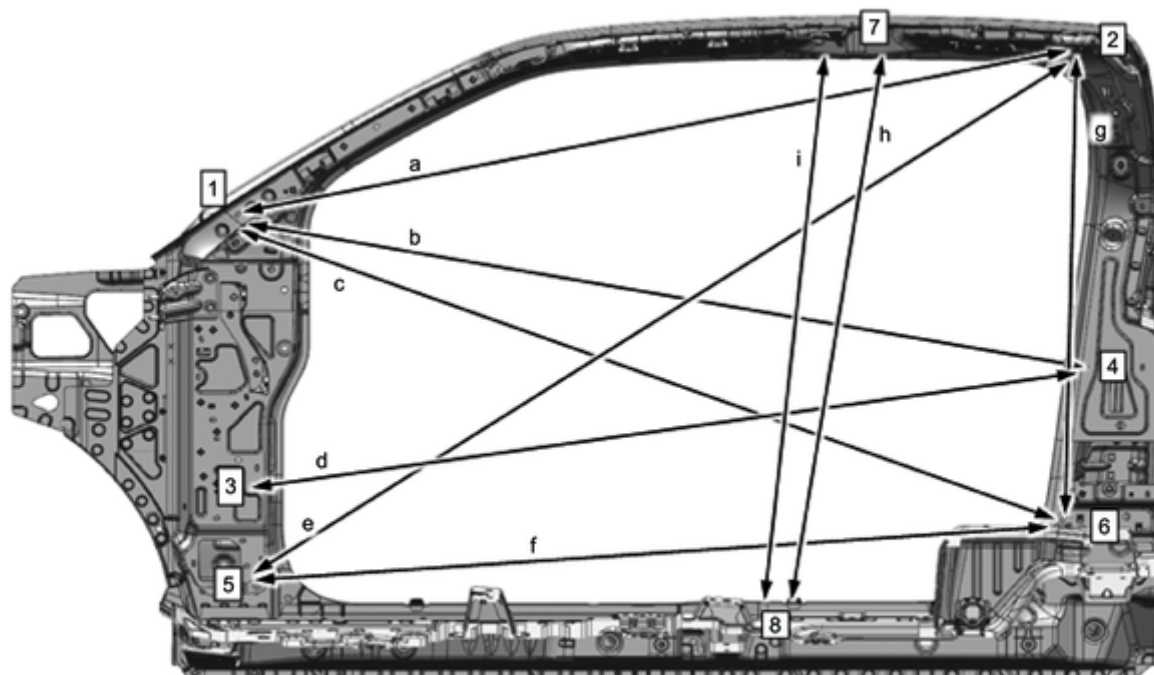

RTWL9GXF001201

Dimensions

a: 1,636 mm { 64.4 in }

b: 1,645 mm { 64.8 in }

c: 1,699 mm { 66.9 in }

d: 1,609 mm { 63.3 in }

e: 1,906 mm { 75.0 in }

f: 1,550 mm { 61.0 in }


g: 985 mm { 38.8 in }

h: 1,173 mm { 46.2 in }

i: 1,166 mm { 45.9 in }

5. Door opening clearance

Regular cab body dimensions

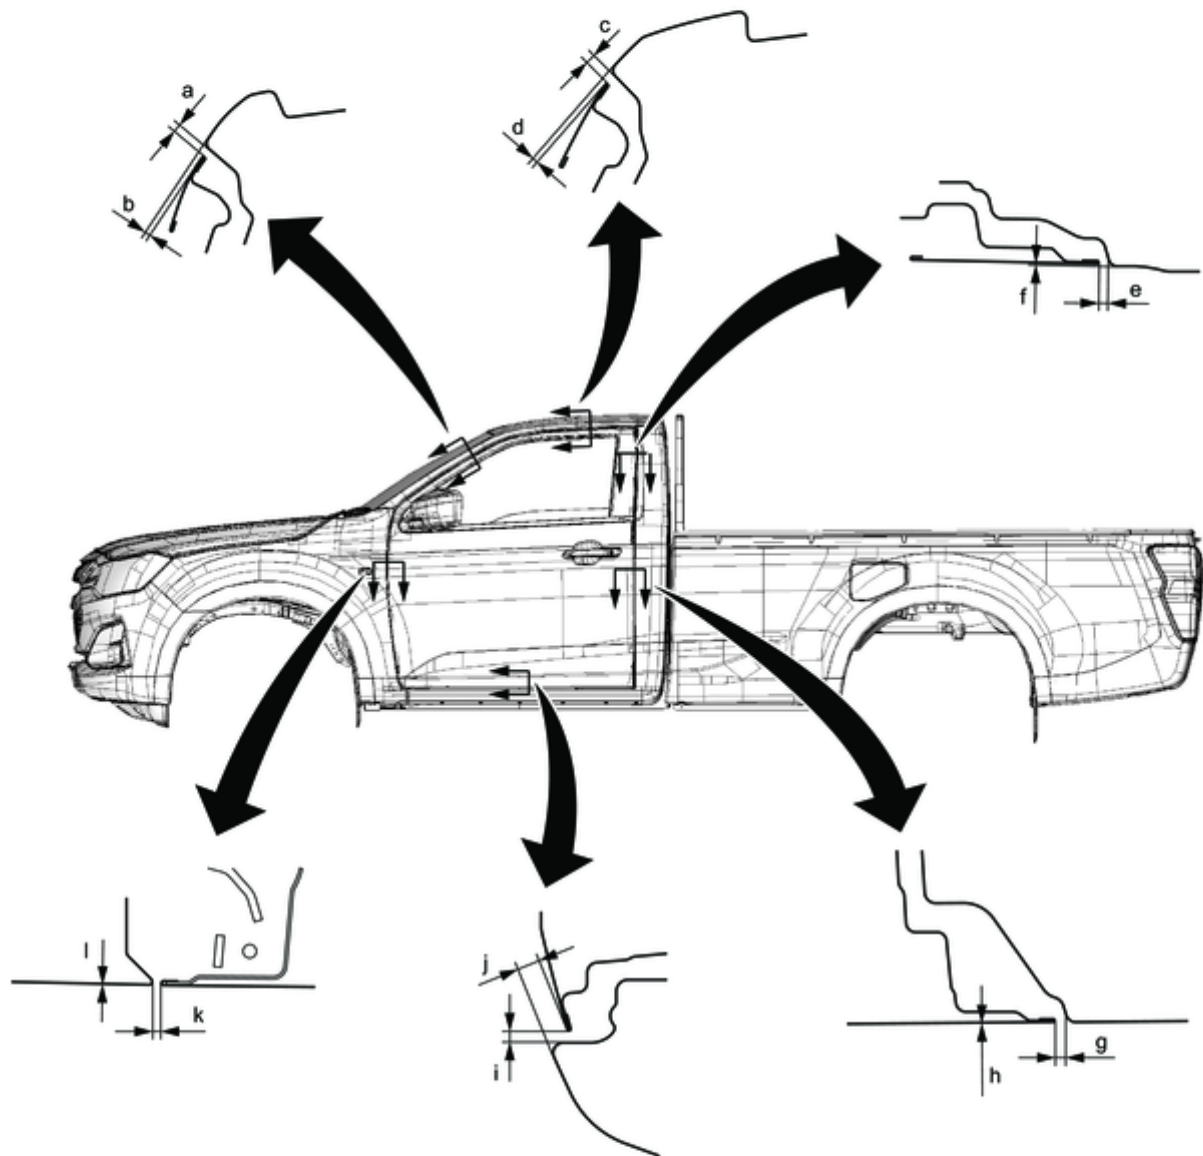


RTWR9BXF000101

Dimensions

- a: 4.0 ± 1.5 mm { 0.16 ± 0.06 in} clearance
- b: 3.3 ± 1.5 mm { 0.13 ± 0.06 in} vertical difference
- c: 4.9 ± 1.5 mm { 0.19 ± 0.06 in} clearance
- d: 3.3 ± 1.5 mm { 0.13 ± 0.06 in} vertical difference
- e: 5.1 ± 1.5 mm { 0.20 ± 0.06 in} clearance
- f: 1.0 ± 1.5 mm { 0.03 ± 0.06 in} vertical difference
- g: 5.5 ± 1.5 mm { 0.22 ± 0.06 in} clearance
- h: 0 ± 1.0 mm { 0 ± 0.03 in} vertical difference
- i: 5.5 ± 2.0 mm { 0.22 ± 0.08 in} clearance
- j: 11.9 ± 2.0 mm { 0.47 ± 0.08 in} vertical difference
- k: 4.5 ± 1.2 mm { 0.18 ± 0.05 in} clearance
- l: 0 ± 1.0 mm { 0 ± 0.03 in} vertical difference

Crew cab body dimension

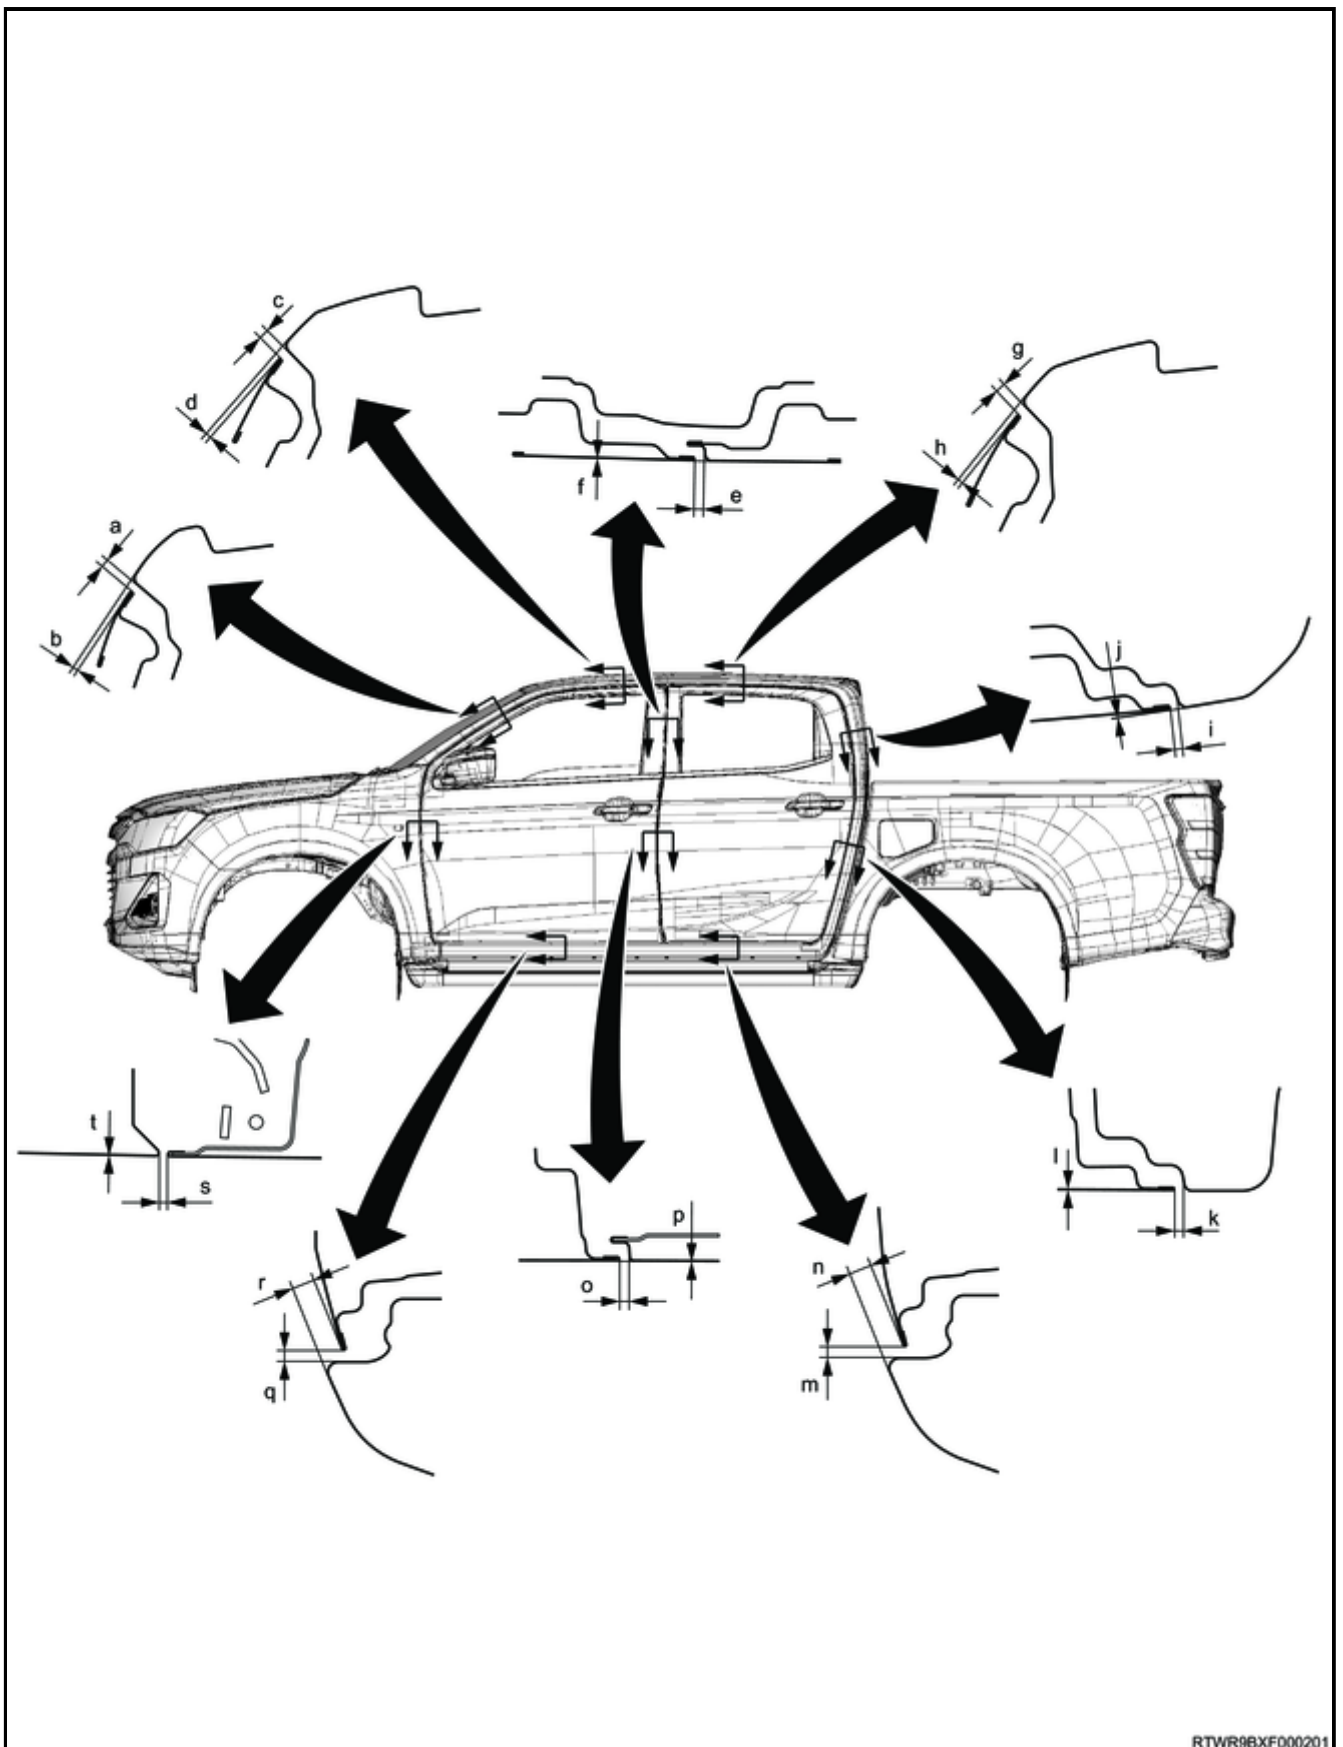

RTWR9BXF000201

Dimensions

- a: 4.0 ± 1.5 mm { 0.16 ± 0.06 in} clearance
- b: 3.3 ± 1.5 mm { 0.13 ± 0.06 in} vertical difference
- c: 4.9 ± 1.5 mm { 0.19 ± 0.06 in} clearance
- d: 3.3 ± 1.5 mm { 0.13 ± 0.06 in} vertical difference
- e: 5.0 ± 1.5 mm { 0.20 ± 0.06 in} clearance

f: 0 ± 1.5 mm { 0 ± 0.06 in} vertical difference

g: 5.0 ± 1.5 mm { 0.20 ± 0.06 in} clearance

h: 3.3 ± 1.5 mm { 0.13 ± 0.06 in} vertical difference

i: 4.5 ± 1.5 mm { 0.18 ± 0.06 in} clearance

j: 0.2 ± 1.0 mm { 0.16 ± 0.03 in} vertical difference

k: 4.6 ± 1.5 mm { 0.18 ± 0.06 in} clearance

l: 0 ± 1.0 mm { 0 ± 0.03 in} vertical difference

m: 5.5 ± 2.0 mm { 0.22 ± 0.08 in} clearance

n: 11.9 ± 2.0 mm { 0.47 ± 0.08 in} vertical difference

o: 5.0 ± 1.5 mm { 0.20 ± 0.06 in} clearance

p: 0 ± 1.2 mm { 0 ± 0.05 in} vertical difference


q: 5.5 ± 2.0 mm { 0.22 ± 0.08 in} clearance

r: 11.9 ± 2.0 mm { 0.47 ± 0.08 in} vertical difference

s: 4.5 ± 1.2 mm { 0.18 ± 0.05 in} clearance

t: 0 ± 1.0 mm { 0 ± 0.03 in} vertical difference

Extend cab model body dimensions

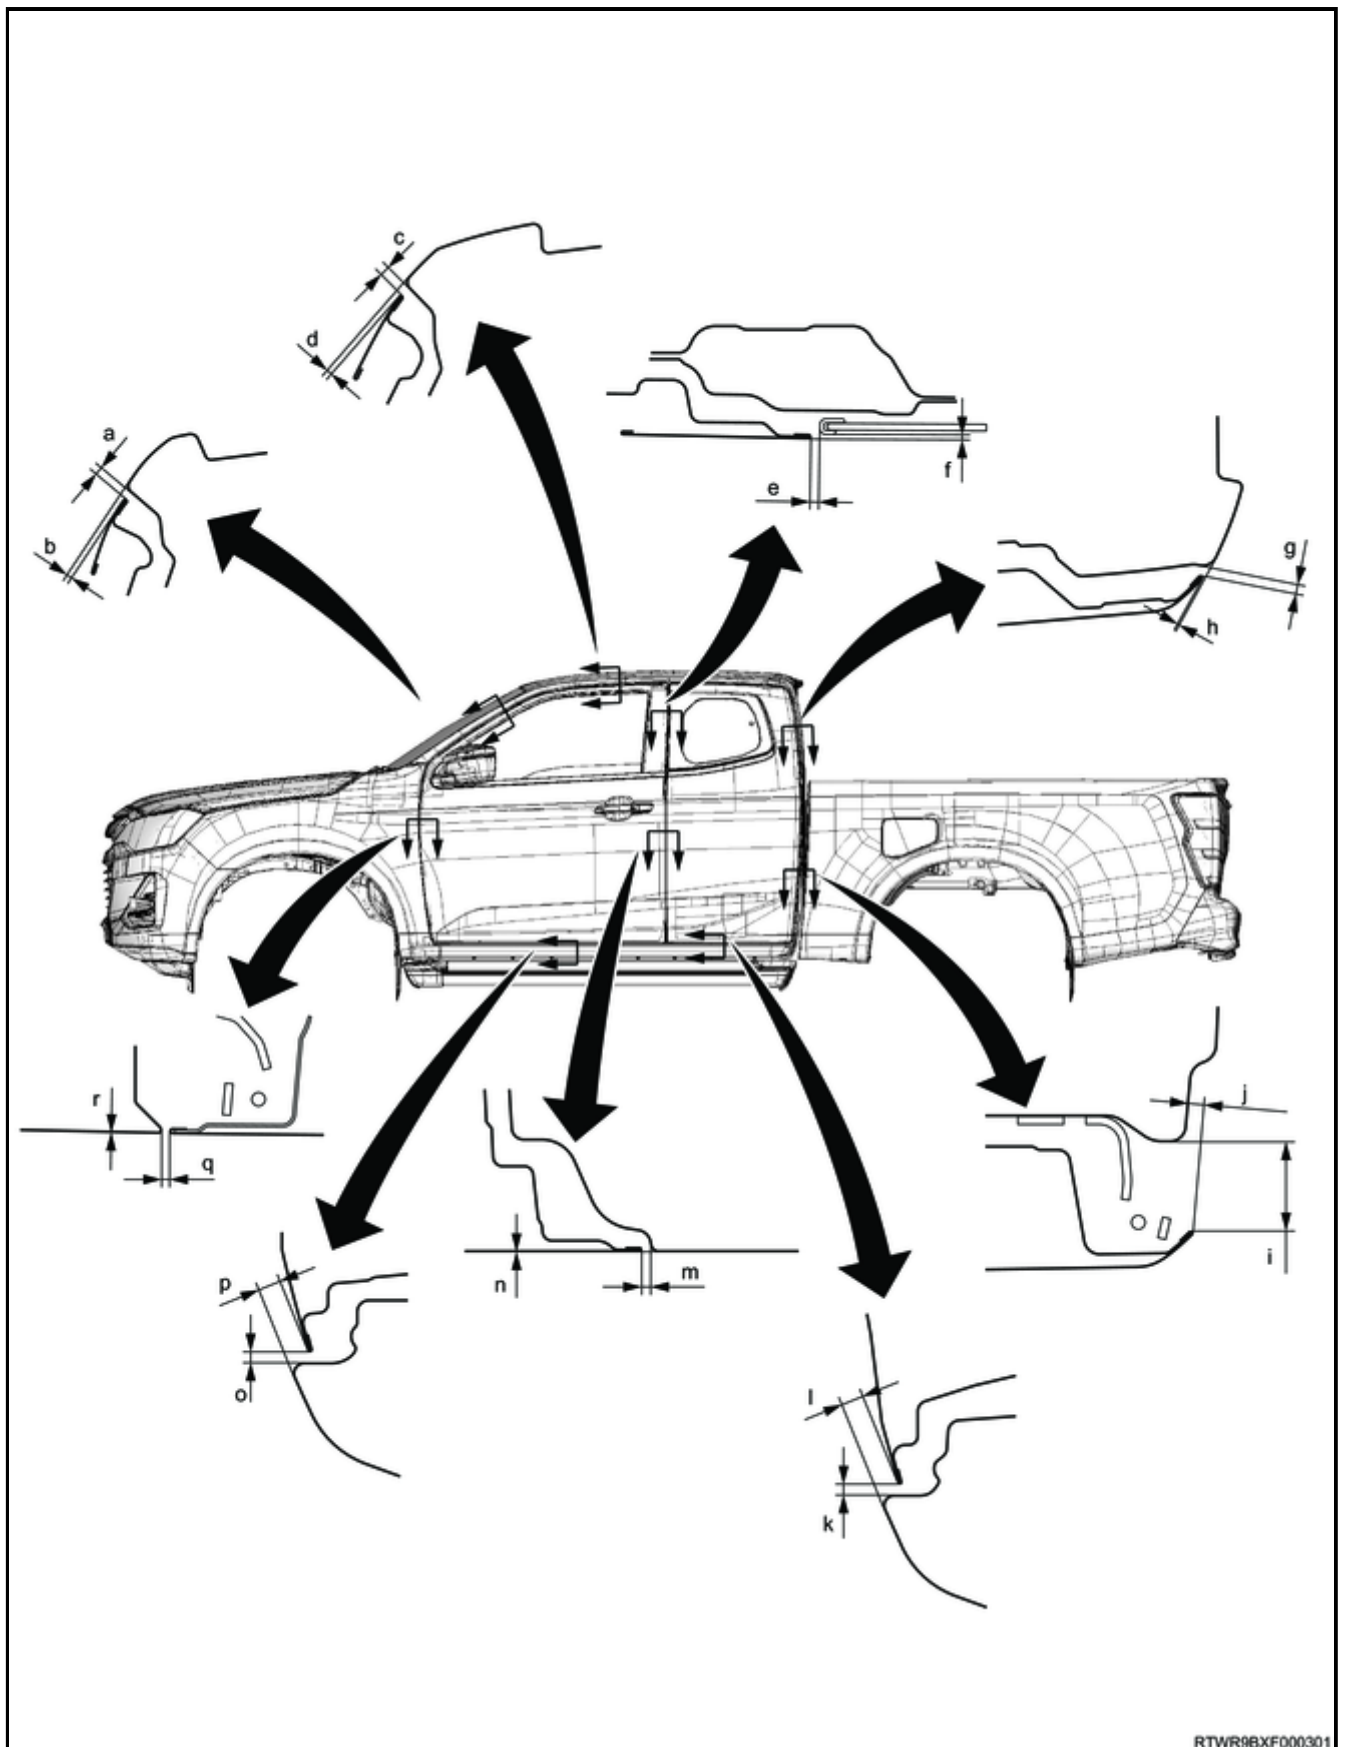

RTWR9BXF000301

Dimensions

- a: 4.0 ± 1.5 mm { 0.16 ± 0.06 in} clearance
- b: 3.3 ± 1.5 mm { 0.13 ± 0.06 in} vertical difference
- c: 4.9 ± 1.5 mm { 0.19 ± 0.06 in} clearance
- d: 3.3 ± 1.5 mm { 0.13 ± 0.06 in} vertical difference
- e: 4.9 ± 1.5 mm { 0.19 ± 0.06 in} clearance

f: 1.8 ± 1.7 mm { 0.07 ± 0.07 in} vertical difference

g: 5.0 ± 1.5 mm { 0.20 ± 0.06 in} clearance

h: 1.0 ± 1.5 mm { 0.03 ± 0.06 in} vertical difference

i: 47.5 ± 1.5 mm { 1.87 ± 0.06 in} clearance

j: 8.3 ± 1.5 mm { 0.33 ± 0.06 in} vertical difference

k: 5.5 ± 2.0 mm { 0.22 ± 0.08 in} clearance

l: 11.9 ± 2.0 mm { 0.47 ± 0.08 in} vertical difference

m: 4.8 ± 1.3 mm { 0.19 ± 0.05 in} clearance

n: 0 ± 1.5 mm { 0 ± 0.06 in} vertical difference

o: 5.5 ± 2.0 mm { 0.22 ± 0.08 in} clearance

p: 11.9 ± 2.0 mm { 0.47 ± 0.08 in} vertical difference

q: 4.5 ± 1.2 mm { 0.18 ± 0.05 in} clearance

r: 0 ± 1.0 mm { 0 ± 0.03 in} vertical difference