

Battery Voltage Sense

PWM_BUZZER PWM_BUZZER

Buzzer

Diagram illustrating the connection of MD_I to various modules:

- MD_I is connected to PWMA_I, PWMB_I, EN_I, DIAG_I, OCM_I, ECA_I, ECB_I, and ECC_I.

MCB to MB - I2C

The diagram illustrates a 5Mbps FD-CAN Bus configuration. It shows two nodes connected to a common bus. Node 1 (top) has pins FDCAN1_RX and FDCAN1_TX. Node 2 (bottom) has pins FDCAN2_RX and FDCAN2_TX. The bus lines are connected to a common bus, which is terminated at both ends with resistors labeled {FDCAN1_TTL} and {FDCAN2_TTL}.

GPIO-LED_I
GPIO-LED_T1
GPIO-LED_T2

GPIO-LED_P
GPIO-LED_R
GPIO-LED_M

GPIO-LED_Debug_1
GPIO-LED_Debug_2

{LED_Finger 1}

{LED_Finger 2}


{LED_Debug}

LEDs

A diagram of a switch. Two horizontal lines on the left represent inputs labeled BOOT_1 and BOOT_2. These lines converge into a single vertical line that then turns right into a horizontal line. This horizontal line ends in a yellow circle with a blue outline, labeled {SW_BOOT}.

Diagram showing three signals (USB-DP_2, USB-DM_2, VBUS_DET2) connected to a USB_2 port. The signals are represented by lines that converge into a single point labeled {USB_2}.

USB PORT

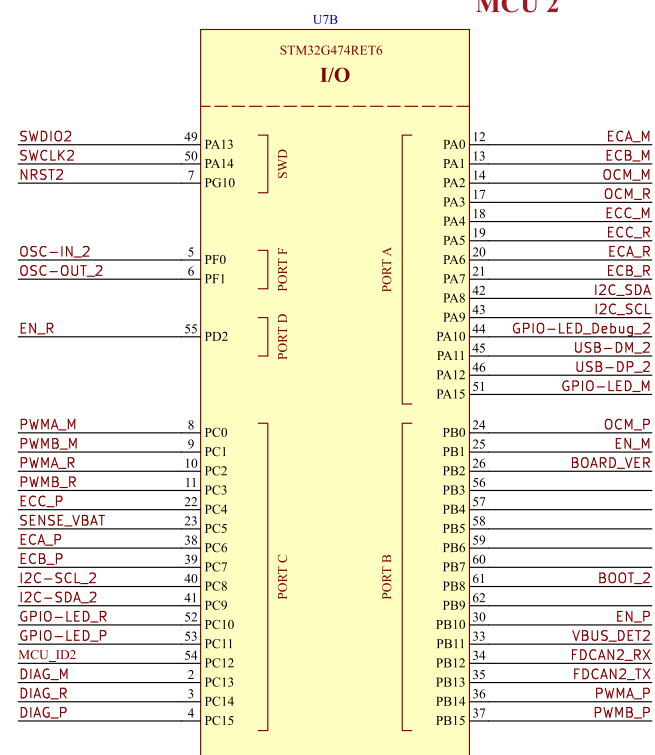

LAYOUT NOTE:
Footprint deviates from
datasheet and IPC7351 to
allow for soldermask sliver
between pads according to
PCBWay design rules.

Comments:	Company: Willas Electronic Corp.		Variant: DRAFT	Git Hash: e99a2fc
	Board Name: Motor Control Board		Project Name: Master Hand	
Sheet Title:	File Name: MCU - IOs.kicad_sch	Designer: Damon	Date: 2026-06-27	Revision: + (Unreleased)
Sheet Path: /Project Architecture/MCU - IOs/		Reviewer:	Size: A3	Sheet: 7 of 23