


[5] Power - Generation

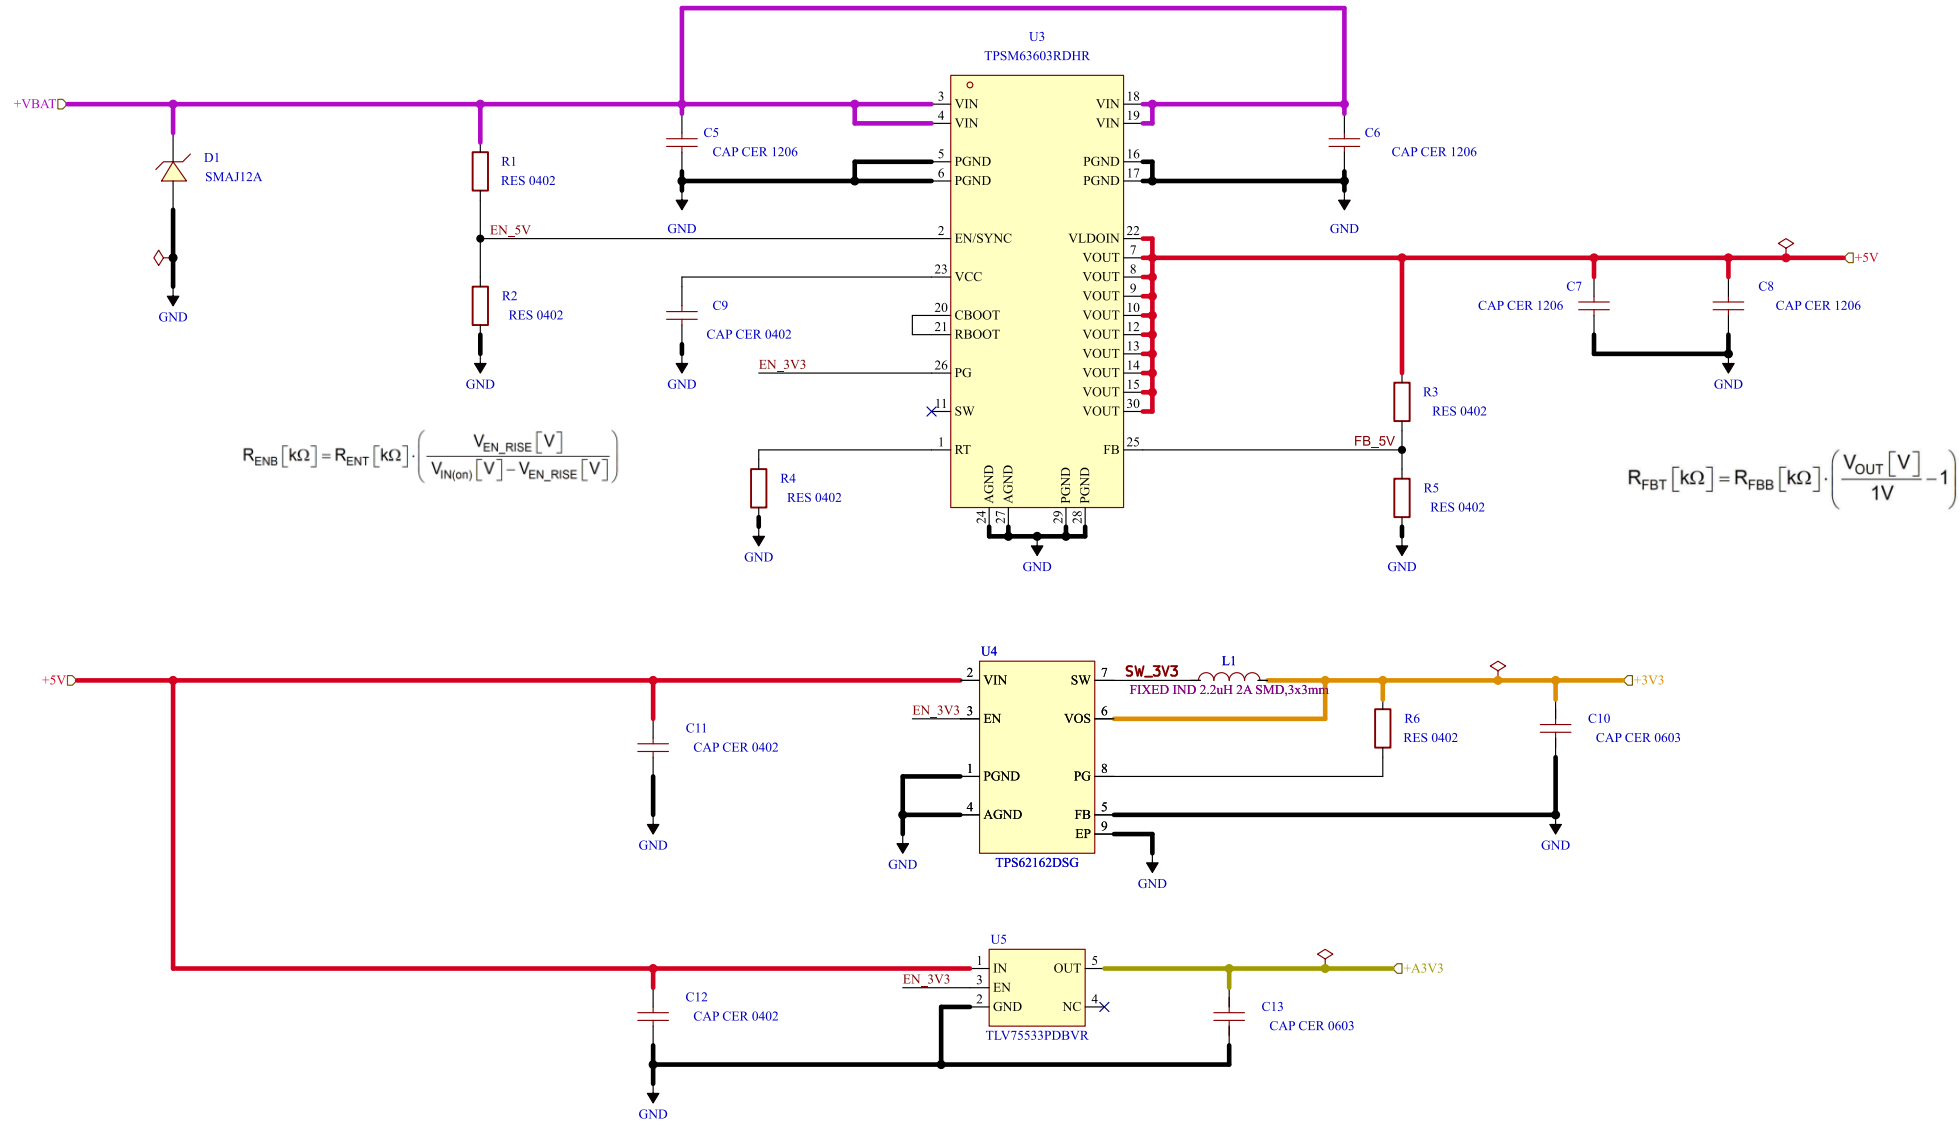

DESIGN NOTE:
PI filter with inductor would
give better EMC performance
but has higher bulk
capacitance requirements.
Ferrite is a good compromise.

LAYOUT NOTE:
Route feedback
traces away from
switching node.

LAYOUT NOTE:
Minimize switching
node loop areas.

Voltage Regulators

DC BULK

DC-Link Bulk Capacitors. 330uF + 10 x 10 uF = 430uF (35V)

Test Points



Comments:	Company: Willas		 Willas Electronic Corp.	Variant: DRAFT		Git Hash: 7187a9a	
	Board Name: Motor Control Board			Project Name: Master Hand			
Sheet Title:	File Name: Power - Generation.kicad_sch		Designer: Damon		Date: 2026-06-27	Revision: + (Unreleased)	
Sheet Path: /Project Architecture/Power - Generation/			Reviewer:		Size: A3	Sheet: 5 of 23	