


[5] Power - Generation

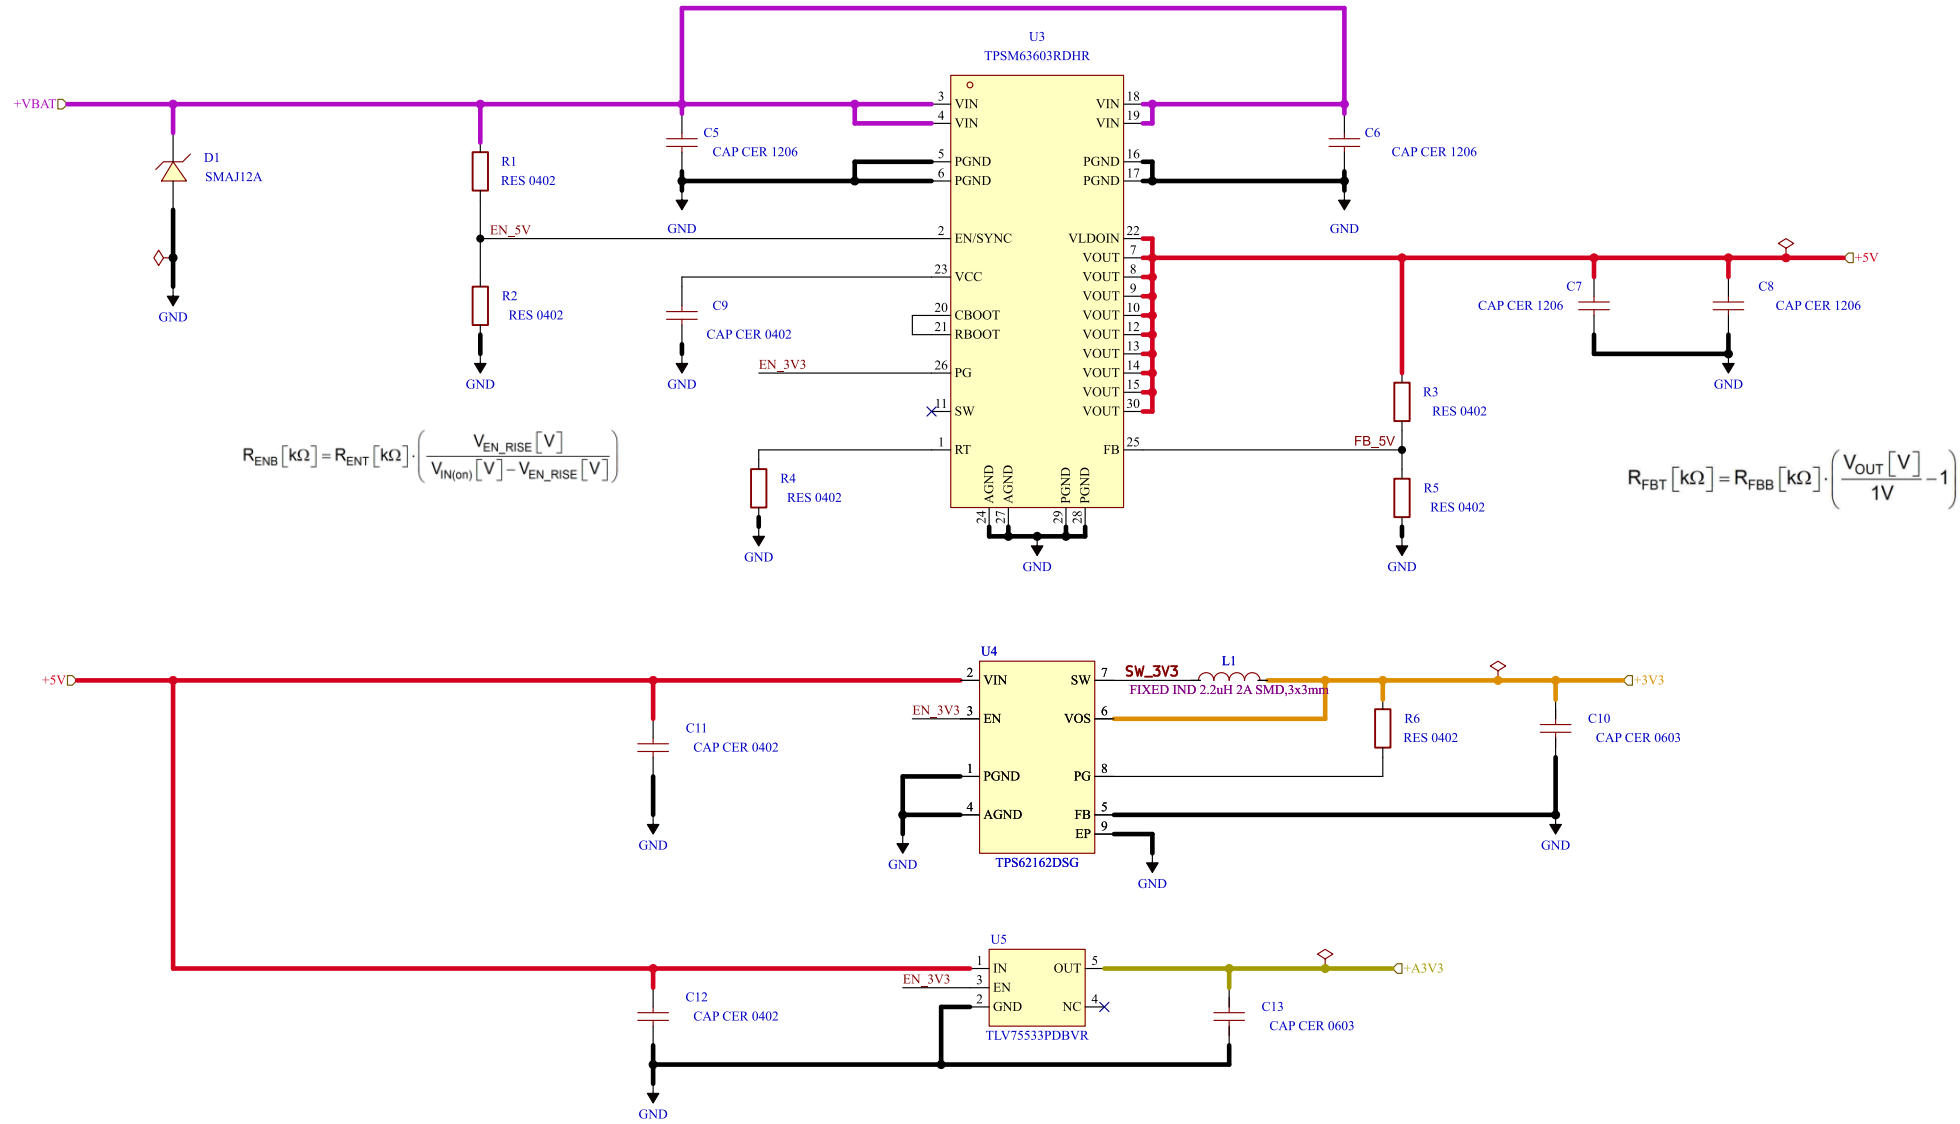


DESIGN NOTE:
PI filter with inductor would
give better EMC performance
but has higher bulk
capacitance requirements.
Ferrite is a good compromise.

LAYOUT NOTE:
Route feedback
traces away from
switching node.

LAYOUT NOTE:
Minimize switching
node loop areas.

Voltage Regulators

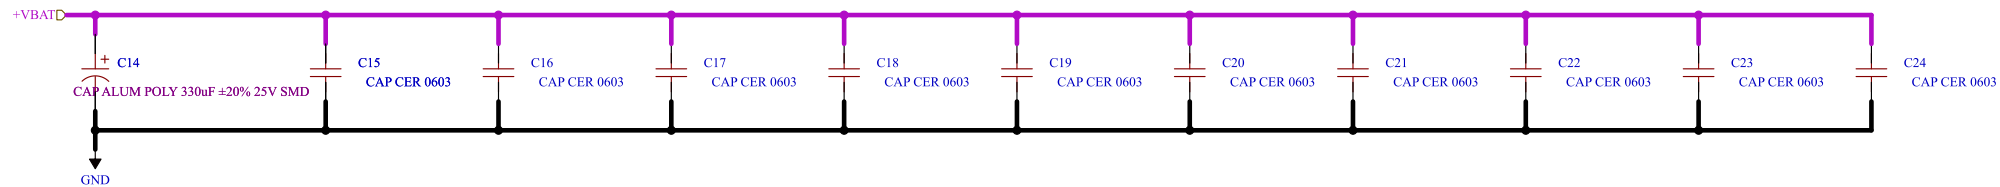

DC BULK

DC-Link Bulk Capacitors. 330uF + 10 x 10 uF = 430uF (35V)

Test Points

