
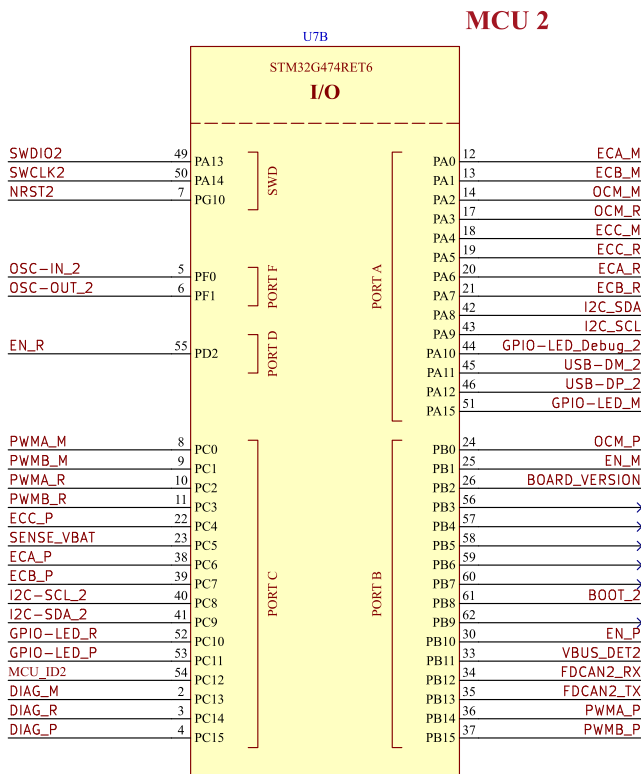


[7] MCU - IOs

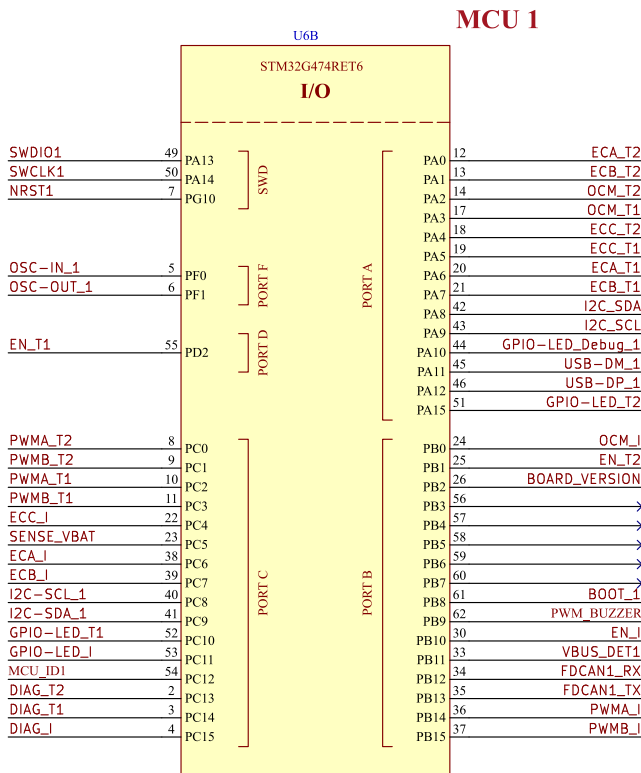


DESIGN NOTE:
We use the LQFP64
version to have extra
pins for controlling an
external fan.

DESIGN NOTE:
Do not forget to flash
option bytes when
flashing for the first
time.


LAYOUT NOTE:
Footprint deviates from
datasheet and IPC7351 to
allow for soldermask sliver
between pads according to
PCBWay design rules.

SENSE_VBAT SENSE_VBAT


Battery Voltage Sense

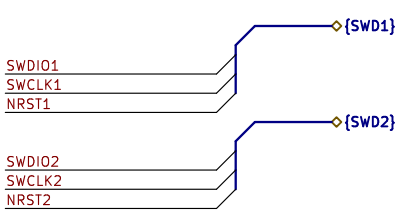


SWD (Debug) Port

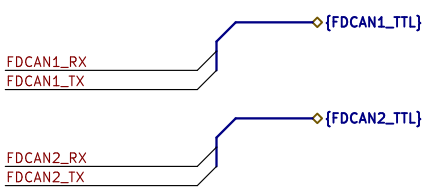


5Mbps FD-CAN Bus

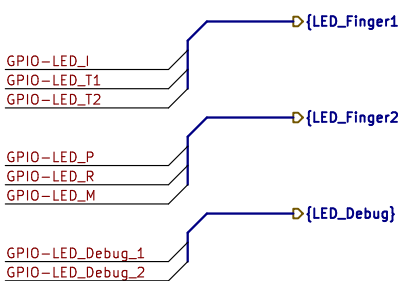

LEDs

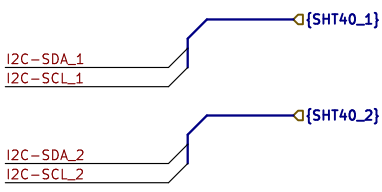

Temperature and Humidity




USB PORT

BOARD_VERSION BOARD_VERSION


Board Version Selection

PWM_BUZZER PWM_BUZZER


Buzzer




MCB to MB - I2C



MCU ID

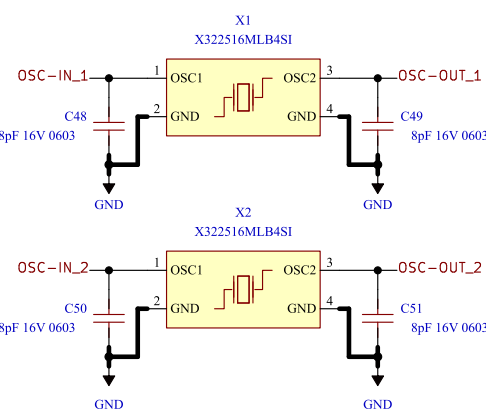

Oscillator HSE



SWITCH

