


[5] Power - Generation

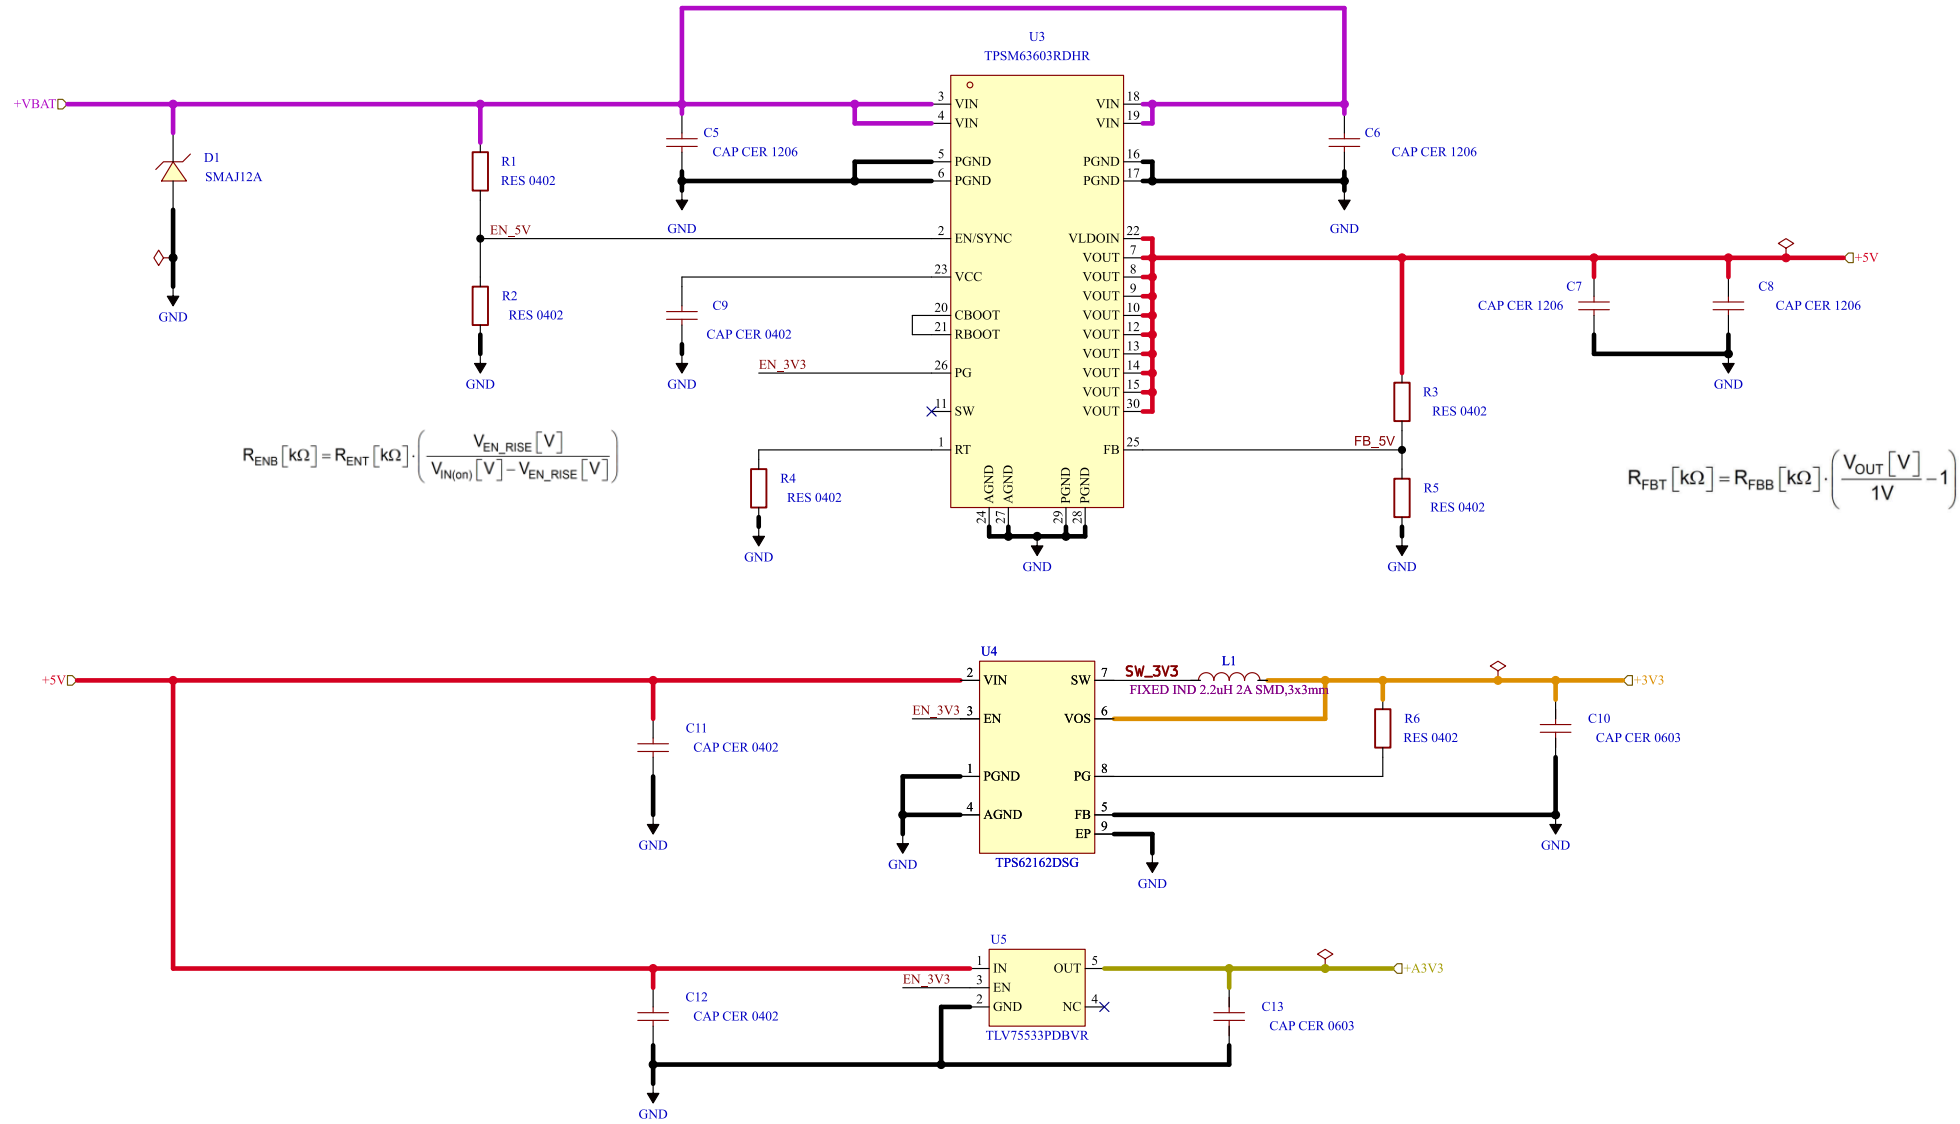


DESIGN NOTE:
PI filter with inductor would give better EMC performance but has higher bulk capacitance requirements. Ferrite is a good compromise.

LAYOUT NOTE:
Route feedback traces away from switching node.

LAYOUT NOTE:
Minimize switching node loop areas.

Voltage Regulators

DC BULK

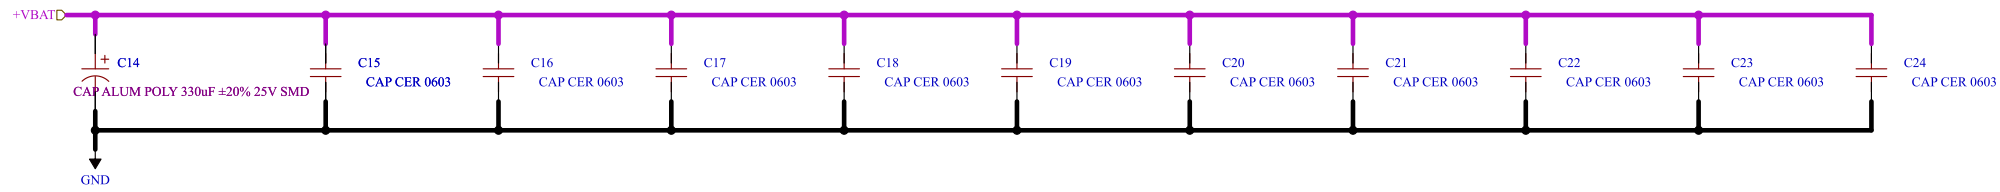

DC-Link Bulk Capacitors. 330uF + 10 x 10 uF = 430uF (35V)

Test Points



Comments:	Company: Willas		 Willas Electronic Corp.	Variant: DRAFT	Git Hash: 76e2375
	Board Name: Motor Control Board			Project Name: Master Hand	
Sheet Title:	File Name: Power - Generation.kicad_sch	Designer: Damon	Date: 2026-06-27	Revision: + (Unreleased)	
Sheet Path: /Project Architecture/Power - Generation/	Reviewer:		Size: A3	Sheet: 5 of 23	