
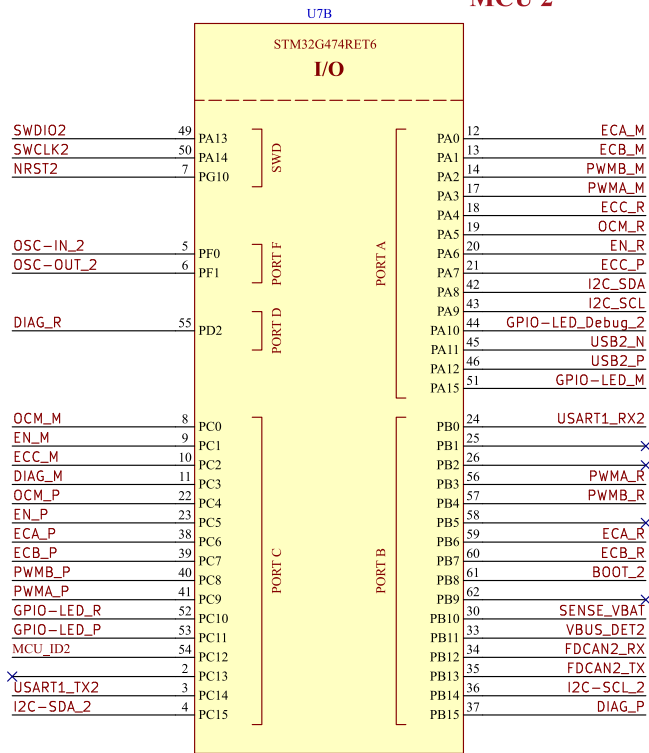
















[7] MCU - IOs

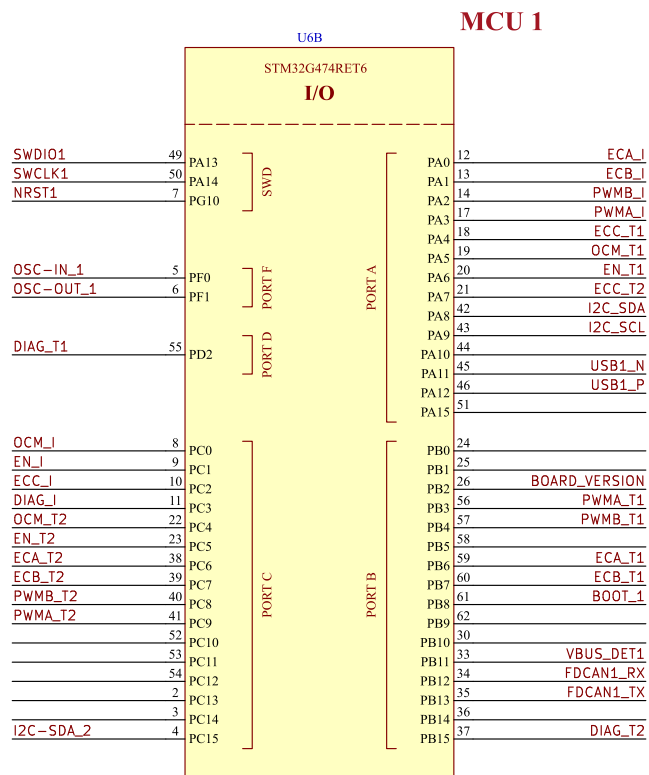

DESIGN NOTE: We use the LQFP64 version to have extra pins for controlling an external fan.

DESIGN NOTE: Do not forget to flash option bytes when flashing for the first time.

LAYOUT NOTE: Footprint deviates from datasheet and IPC7351 to allow for soldermask sliver between pads according to PCBWay design rules.

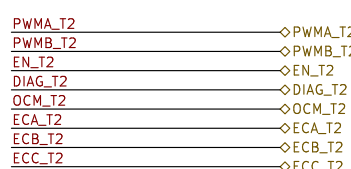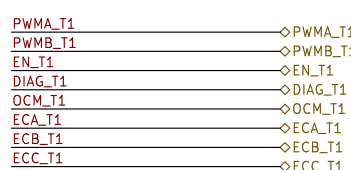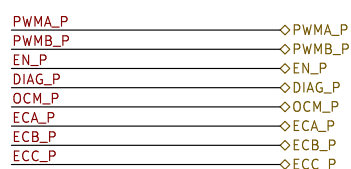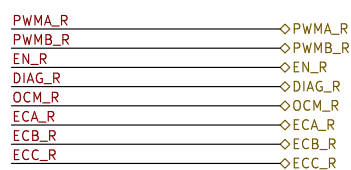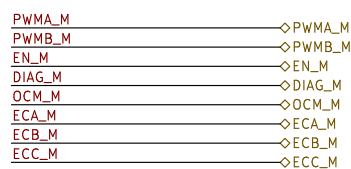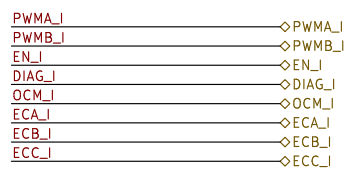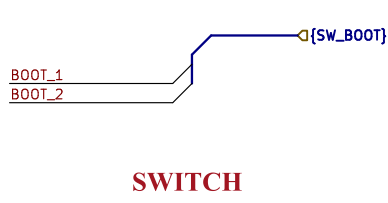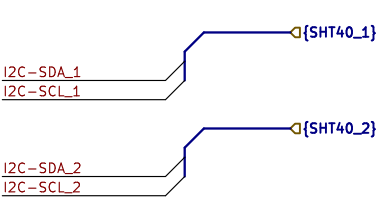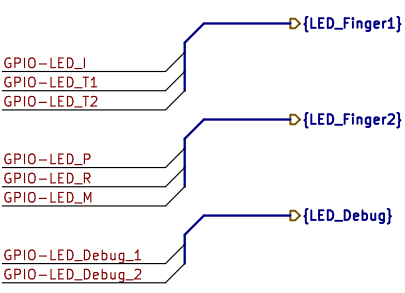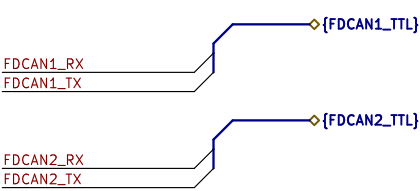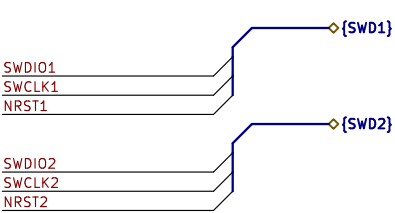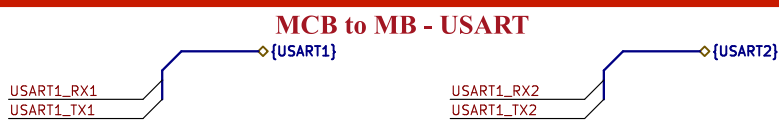

Motor Driver


Battery Voltage Sense




Board Version Selection




SWD (Debug) Port




5Mbps FD-CAN Bus




LEDs




Temperature and Humidity



USB PORT




MCB to MB - I2C




Buzzer

MCU ID




Test Points


MD Index




MD Middle




MD Ring



MD Pinky



MD Thumb 1



MD Thumb 2

