

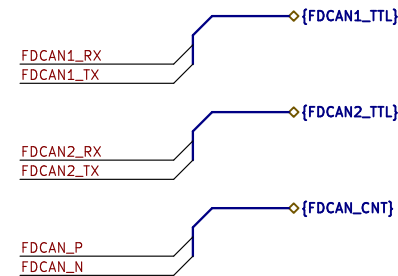
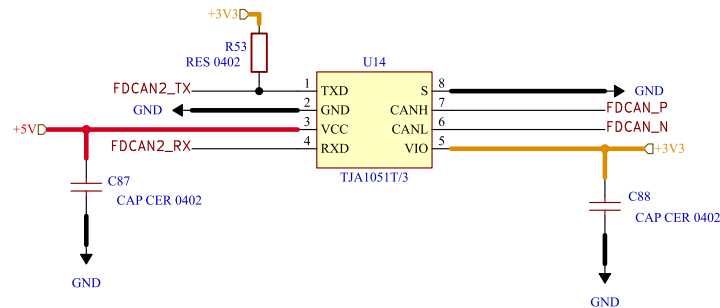


[15] Interface - FD-CAN



DESIGN NOTE:
Silent mode disabled, Pin "S" to ground.

DESIGN NOTE:
120-ohm termination in Interconnects sheet.

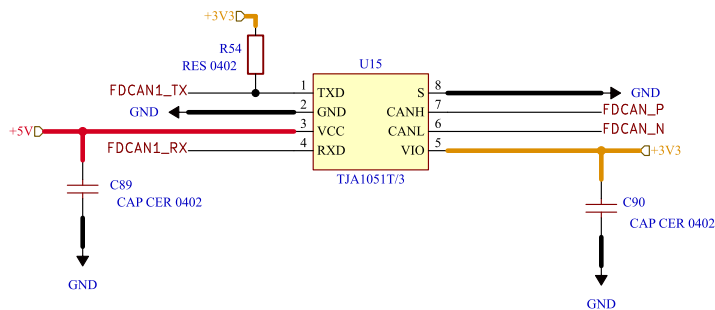

LAYOUT NOTE:
Place close to FD-CAN connector if possible to reduce stub length.

LAYOUT NOTE:
We decided to route it further away to minimize risk of ground lift on the RX/TX lines due to high currents.

Fault Protected FD-CAN Transceiver