


[5] Power - Generation

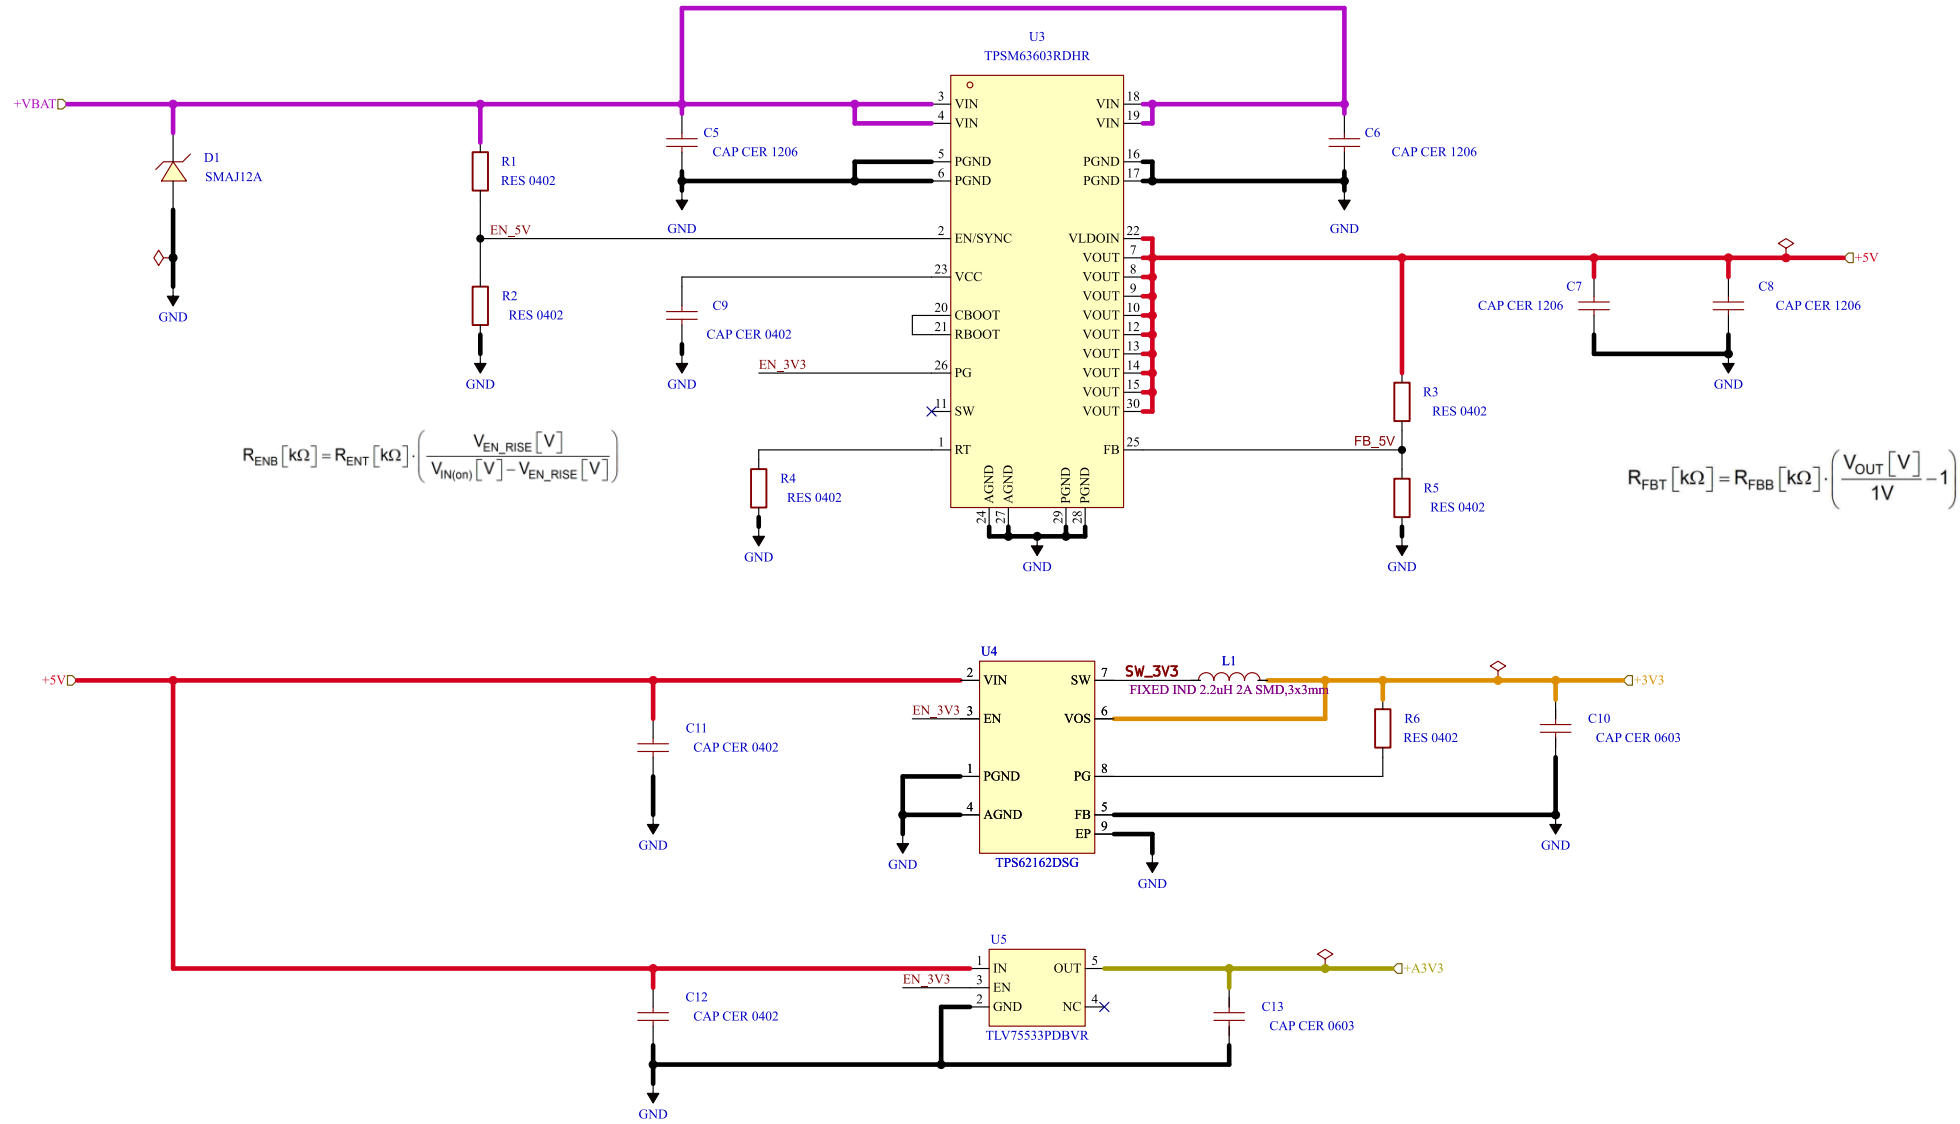


DESIGN NOTE:
PI filter with inductor would give better EMC performance but has higher bulk capacitance requirements. Ferrite is a good compromise.

LAYOUT NOTE:
Route feedback traces away from switching node.

LAYOUT NOTE:
Minimize switching node loop areas.

Voltage Regulators

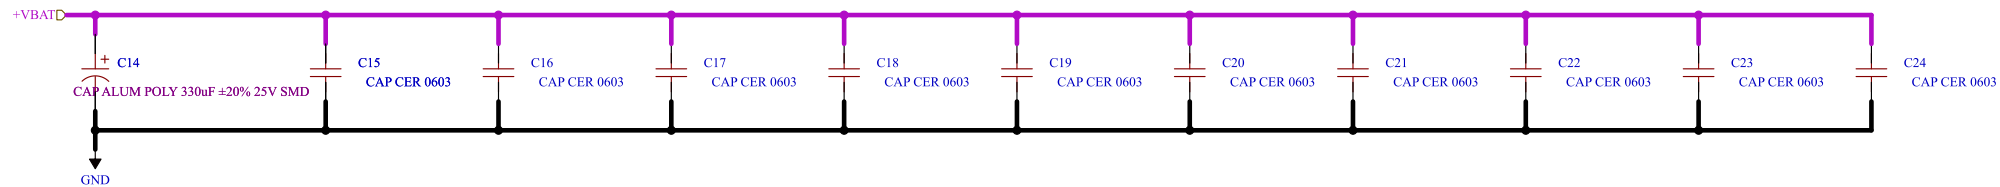

DC BULK

DC-Link Bulk Capacitors. 330uF + 10 x 10 uF = 430uF (35V)

Test Points

