
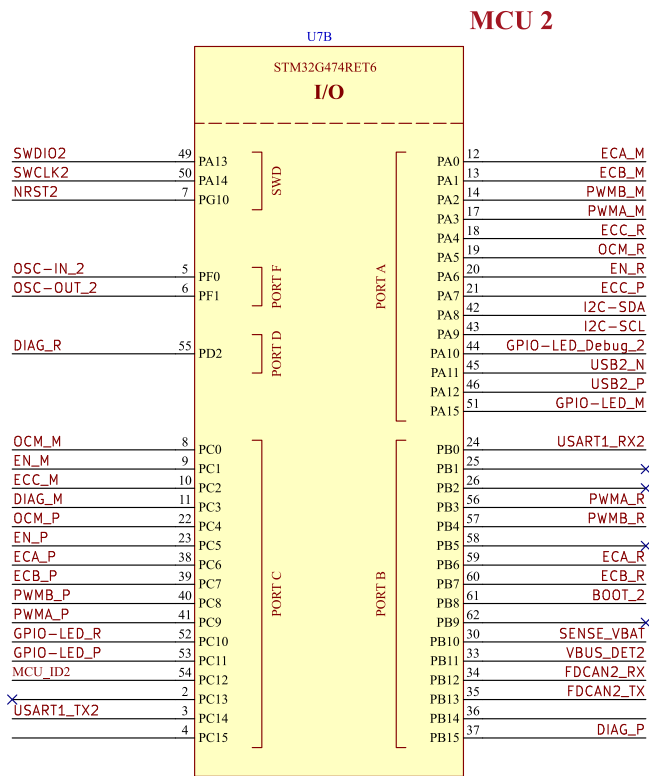


[7] MCU - IOs

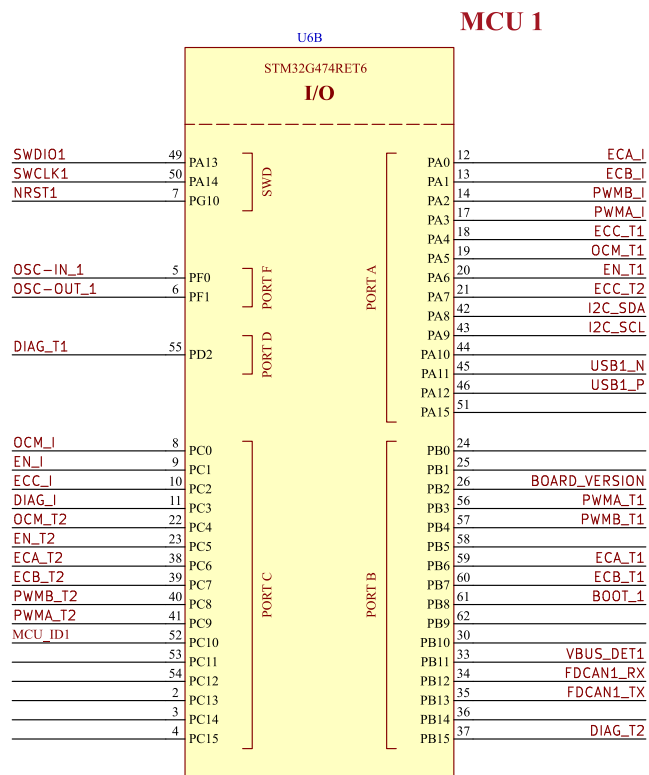

DESIGN NOTE:
We use the LQFP64 version to have extra pins for controlling an external fan.

DESIGN NOTE:
Do not forget to flash option bytes when flashing for the first time.

LAYOUT NOTE:
Footprint deviates from datasheet and IPC7351 to allow for soldermask sliver between pads according to PCBWay design rules.




Battery Voltage Sense




Board Version Selection


MCB to MB - USART

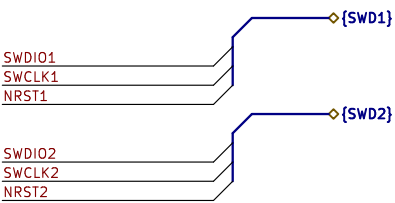


SWD (Debug) Port

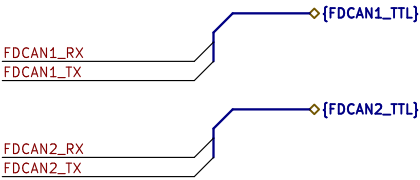


5Mbps FD-CAN Bus




MCU ID

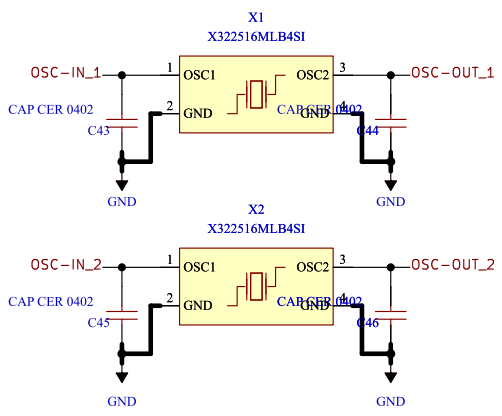


Oscillator HSE

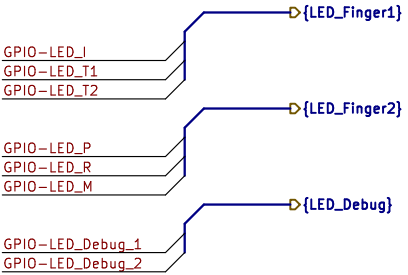

LEDs









Temperature and Humidity



SWITCH



USB PORT

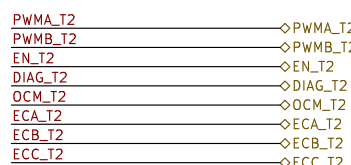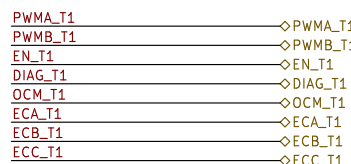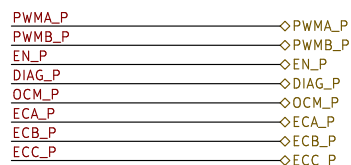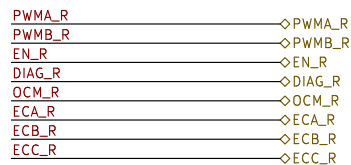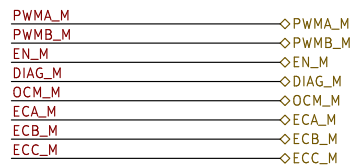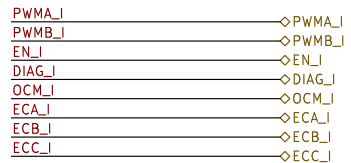

Motor Driver


Battery Voltage Sense



Board Version Selection



SWD (Debug) Port




5Mbps FD-CAN Bus



MD Index



MD Middle




MD Ring




MD Pinky



MD Thumb 1



MD Thumb 2



Temperature and Humidity




USB PORT



MCB to MB - I2C



Buzzer



MCU ID



Test Points