



Robustness of the indices for the zero-inflated cable outputs ($L_{\text{rest}} = 1.2\text{-}1.4$ m, 40% of runs slack)

(a) $T_{\text{wale}}(N)$: raw vs $\log(1 + T)$

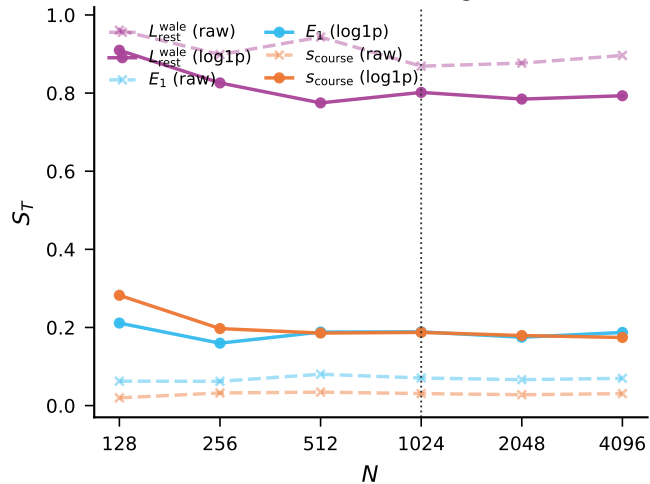

(b) $T_{\text{course}}(N)$: raw vs $\log(1 + T)$

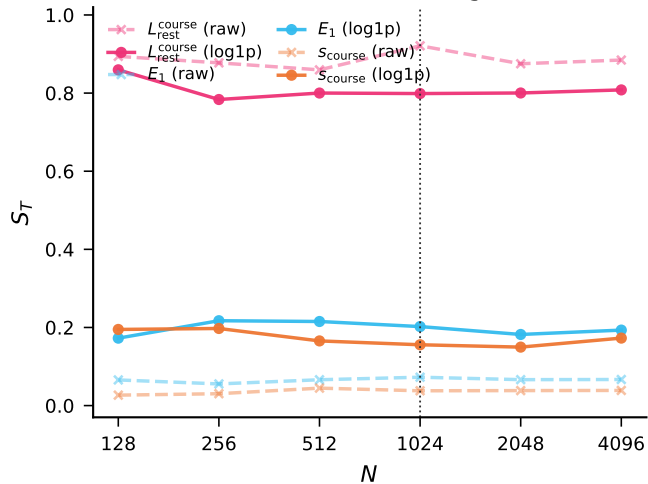

(c) cable ΔH : variance-based vs moment-independent
Spearman rank correlation 0.78

