



(a) how far the shape moves


equivalent width of same-stiffness fabric (mm)

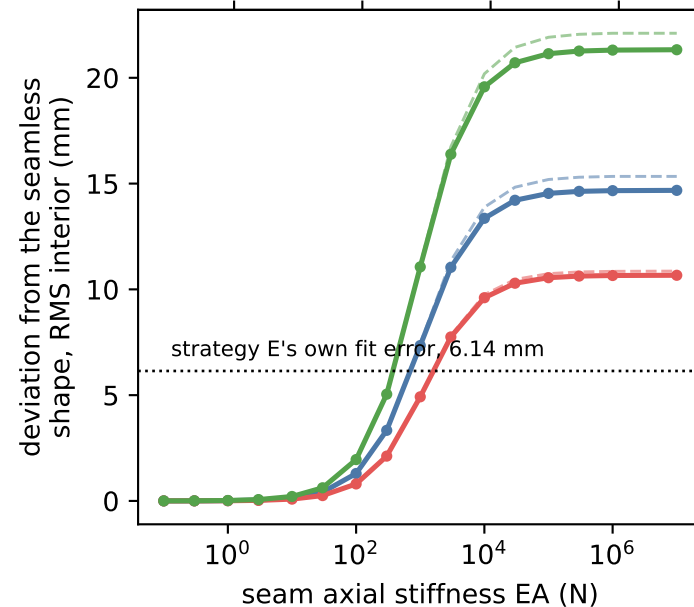


(d) rigid seam on R0R1 | R2
max 33 mm

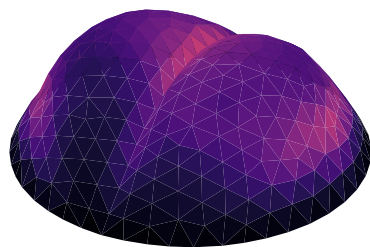


(b) the seam makes the fit worse

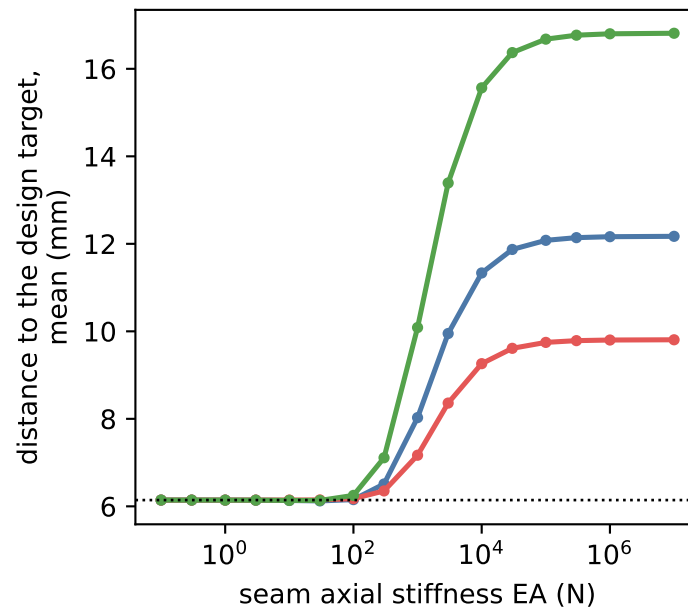

(e) rigid seam on R0 | R1
max 32 mm

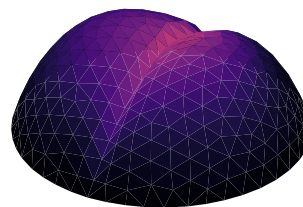

(c) a stiff seam pulls the crown down

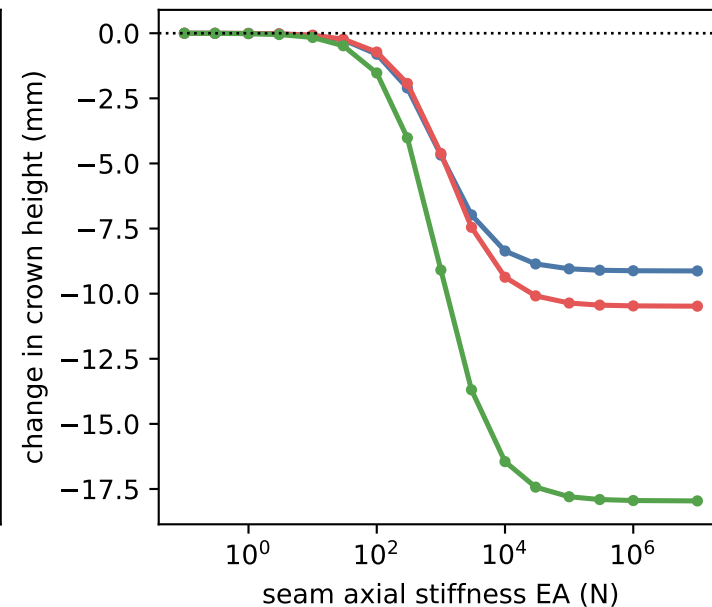

- R0R1 | R2 material jump, 76 seg, 5.77 m
- R0 | R1 no material jump, 17 seg, 1.31 m
- both seams
- tension-only seam (fabric, buckles)
- two-sided seam (bonded tape)

Non-sliding cable on the region boundary of strategy E, rest length read off the pre-strained rest shape V0_mod, so the seam is loaded at nominal (8% stretched, 72/76 segments taut).

Saturation is the rigid-seam bound: no model of the transition that only adds axial stiffness along the line can exceed it.