Four axes carry three quarters of the variation

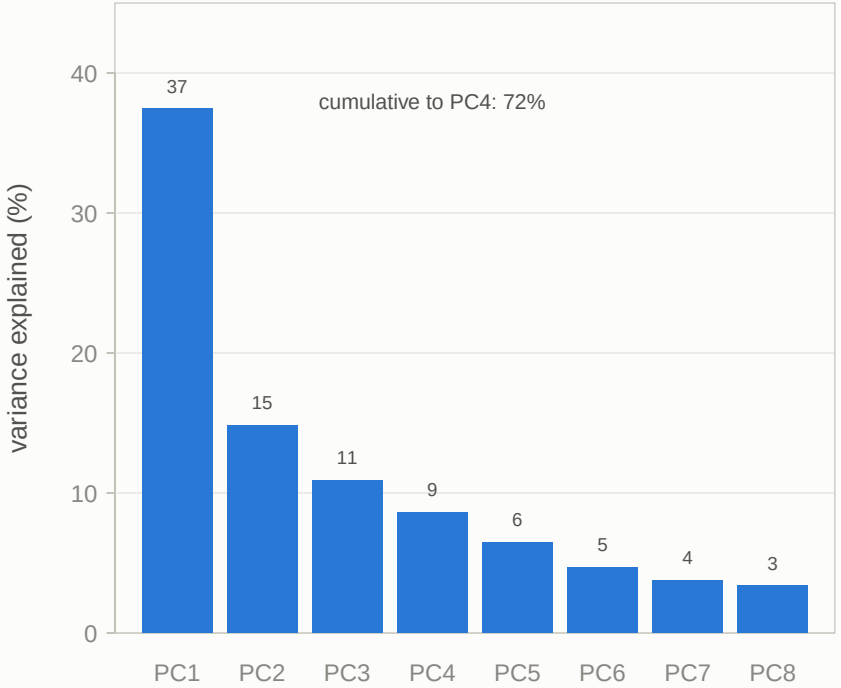
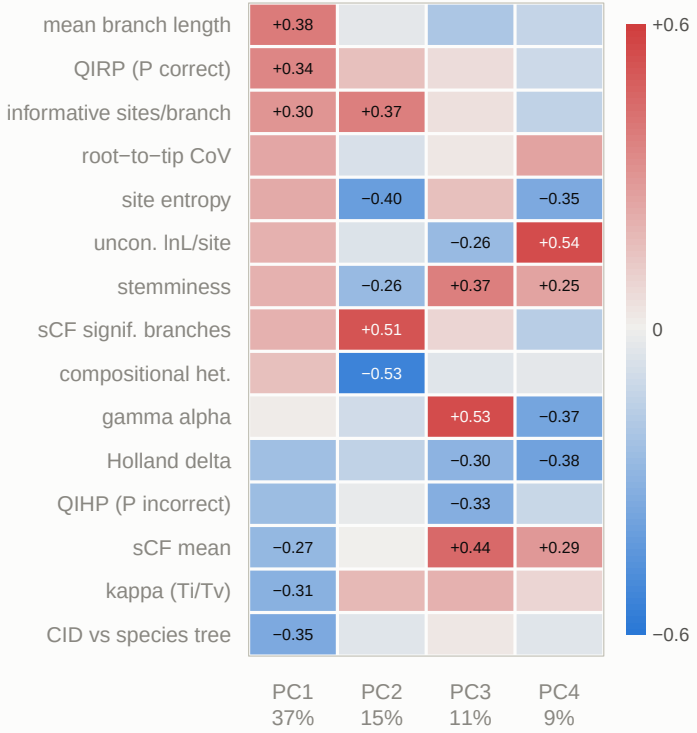
Metric loadings on the first four axes