


佳II筒灯产品介绍-（压铸款）

2023/06

全球市场营销中心

© Copyright 2023 - All rights reserved
This presentation is the intellectual property of Opple Industrial Design and is subject to current copyrights. Dissemination, copying, modifying or distribution without our expressed written consent is strictly prohibited. The used images and graphics only serve research and illustration purposes – they are not to be published.

应用场景 | 品质筒灯佳II

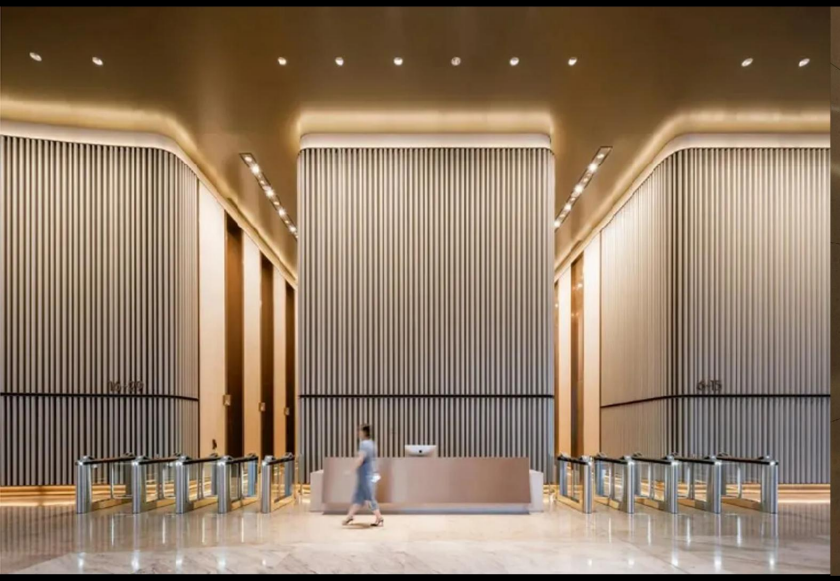





办公&医疗

办公大堂/医院门诊大厅/电梯厅/办公区等，因考虑节能及使用效果进行智能调光。

酒店连锁

会议室及走廊，均匀明亮，满足会议讨论、演讲、PPT投影等场景控制氛围营造，真实还原物体颜色。

商业连锁&地产综合体

电梯厅/服务中心/收银区/半户外区域，高光效高亮度，满足对照明光线的要求。

© Opple Design 2023 I Confidential

产品定位 | 品质筒灯佳II

专业款


皓筒灯


皓柔PLUS

品质款


佳防眩


佳全金属


合II


冰雨


佳明装


合II明装

基础款


铂钻


铂钻防眩


铂钻深筒


铂钻明装


雅韵


雅韵防眩


雅韵深筒






佳II产品系列：
佳II压铸款——皓柔PLUS、佳防眩
佳II明装款——佳明装

产品定位：品质型

销售渠道：11、19

© Opple Design 2023 I Confidential

OPPLE
欧普照明

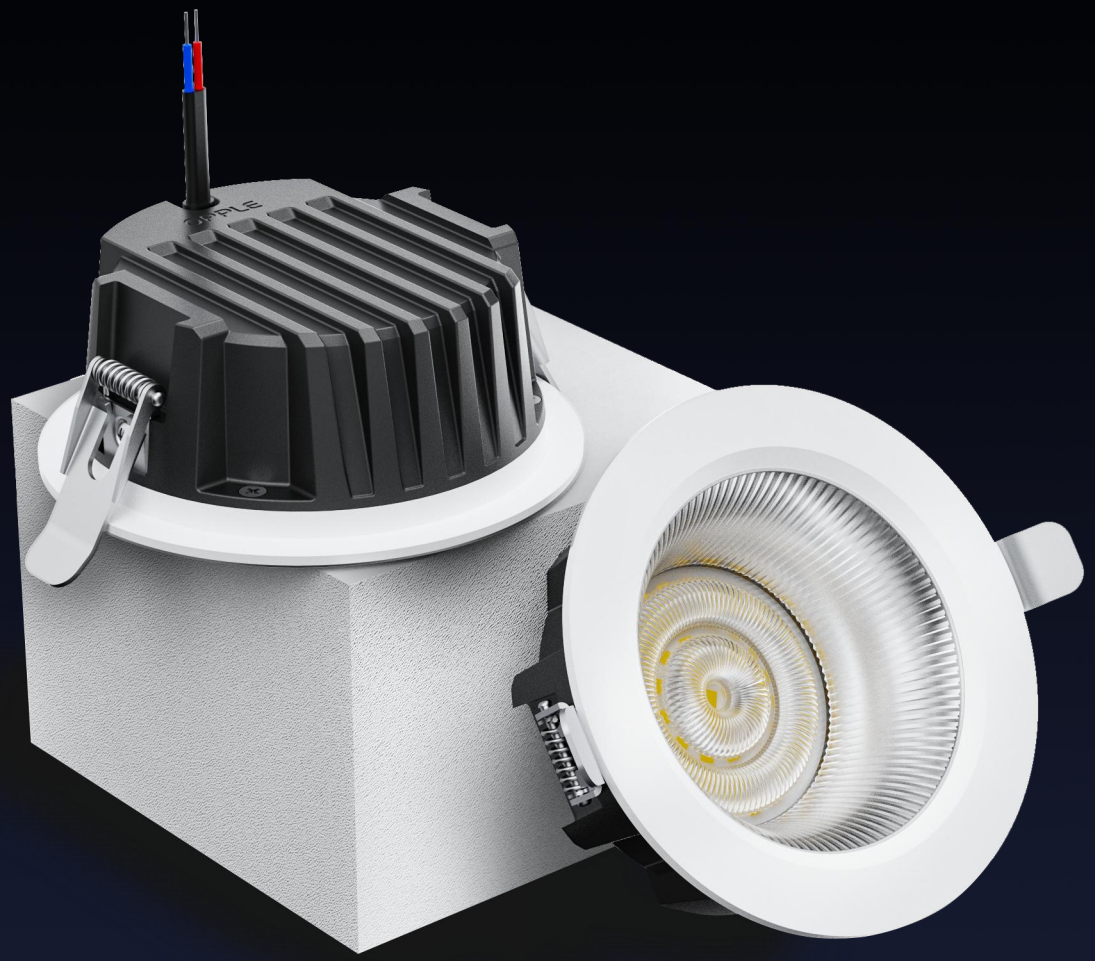

超高光效

优质LED灯珠和光学系统设计，全系列光效100lm/W，部分SKU 130lm/W。

高防眩

灯珠环形排布、光源自身混色无需透镜表面混色处理,光斑均匀通透，视觉防眩,UGR小于19/22

高品质

压铸散热器，耐用可靠，寿命长达30000H

欧普室内无主灯筒灯新品介绍


OPPLE Introduction to Indoor Downlight without Main Lamp

产品卖点 | 多挡色温



3000K	3500K	4000K	5700K
暖白色	白色	中性色	冷白色

OPPLE
欧普照明

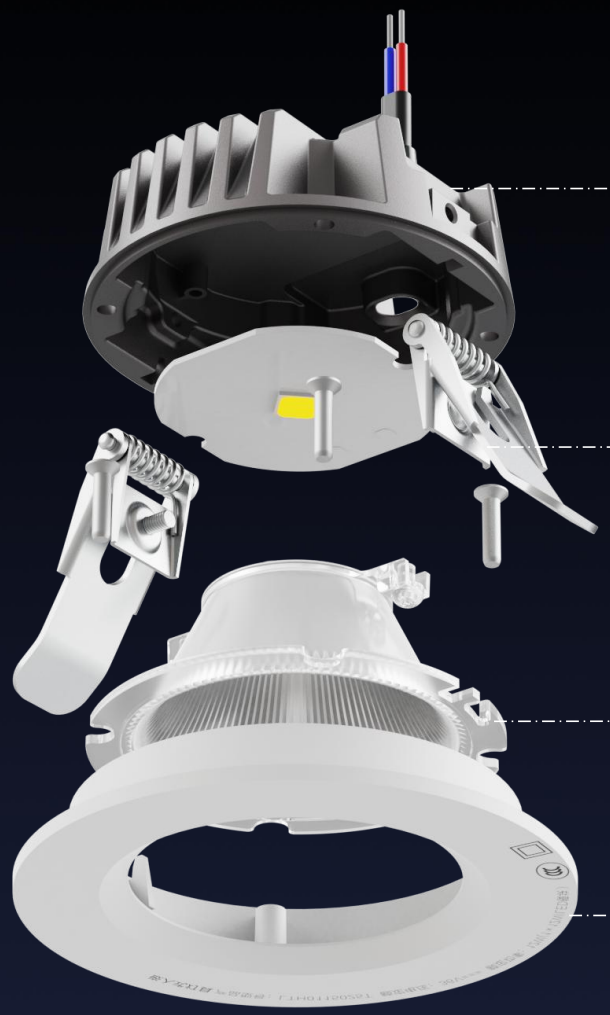


五金压铸，金属磨砂喷漆

全金属卡簧，便捷安装

环形透镜（4寸以上）
COB一体式透镜（4寸以下）


PC材质印花处理，极致触感

OPPLE
欧普照明

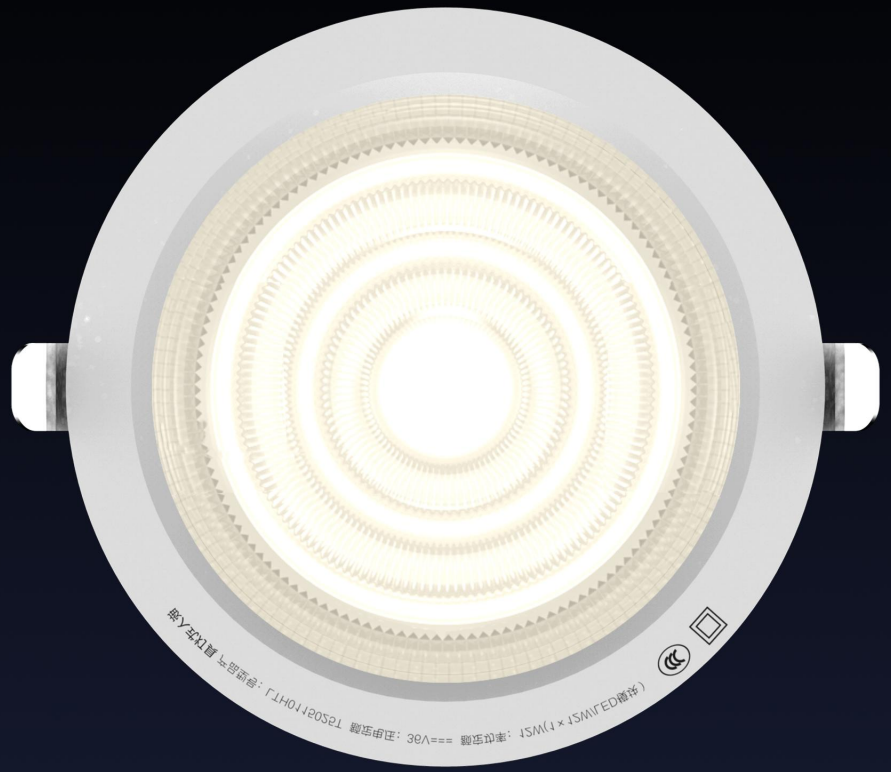



I. 光学系统设计效率高：
75%→84%



II. 超高光效灯珠：
150lm/W→190lm/W




III. 可布置的灯珠数量灵活
环形透镜 多种排布组合；光斑
均匀通透

OPPLE
欧普照明

COB一体式透镜方案

分体式环形透镜方案

3寸 4寸 5寸 6寸 8寸

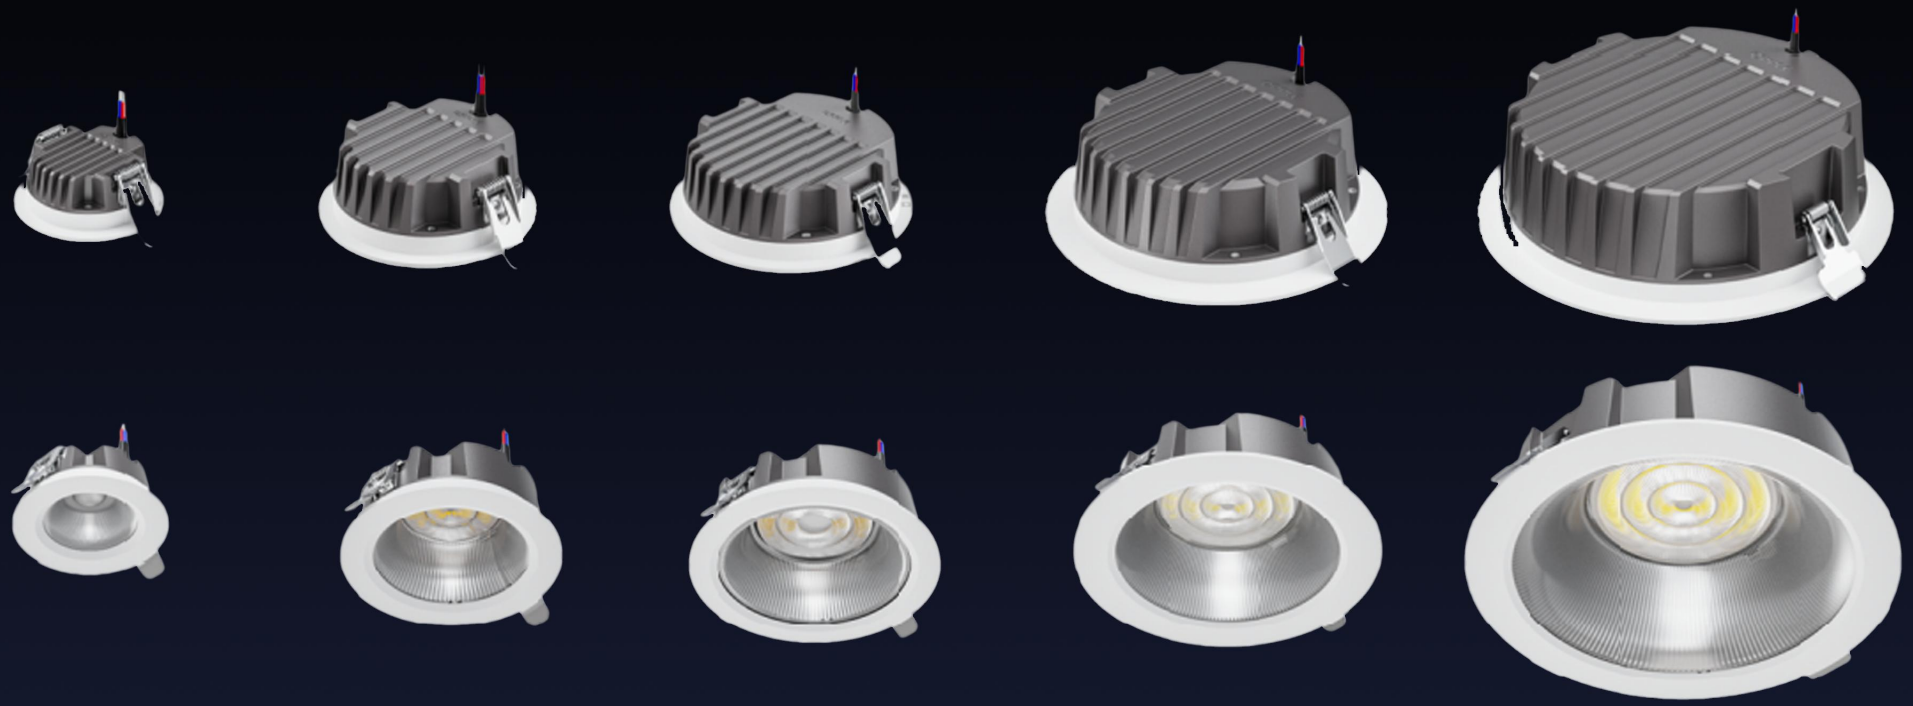

25°遮光角 URG < 19/22

从视觉层面做到真正防眩

欧普室内无主灯筒灯新品介绍

OPPLE Introduction to Indoor Downlight without Main Lamp

产品拓展丨可拓展性

参数	标品规格	可定制范围
色温	3000/3500/4000/5700/2700-5700	2700/6500/2700-6500
显指	Ra90	Ra80/Ra95
光束角	70°/65°	泛光
功率	5/7/9/12/15/20/25/30/40W	≤40W
光效	100/130lm/w	80-130lm/w
可见面环宽度	10/15mm	8~10mm
调光方式	蓝牙调光调色	调光：0-10V/DALI/蓝牙/可控硅
面环	白色	黑色
灯体颜色	星空灰	黑色
反射器外观	透明	白色/黑色/电镀
光源品牌	/	其它主流品牌
防护等级	IP20	IP54

产品拓展丨可拓展性





可拓展性

COB透镜

SMD透镜





黑色二级反射器

银色二级反射器

白色二级反射器

扩散板

产品信息　产品参数


图片					
开孔尺寸	开孔75	开孔100	开孔125	开孔150	开孔200
规格尺寸	φ86*33.5	φ113*43.5	φ138*39.5	φ173*49	Φ226*60mm
功率	5/7/9W	9/12W/15W	15W/20W	20W/25W	30W/40W
光通量	100-110lm/W（部分SKU130lm/W）				
光束角	75°				70°
色温	3000/3500/4000/5700K（15W&20W有2700-5700K调光调色款）				
功率因数	0.9				
防触电等级	Class II				
IP等级	IP20（可定制IP54）				
灯体材质	压铸铝灯体				
安装方式	嵌入式				
灯具寿命	30000Hrs（@LN70/B50）				
工作环境	-20℃~40℃				

产品信息　产品参数

图片				
大小	4寸	5寸	6寸	8寸
产品尺寸	φ100*110	φ125*135	φ150*160	φ200*185
功率	10W	15W	20W	30W/40W
光通量	1100-1200	1500-1600	2000-2200	30W/3200-3600 40W/5100-5300
光束角	70°		65°	
色温	3000/3500/4000/5700K			
功率因数	0.9			
防触电等级	Class II			
IP等级	IP20（可定制IP54）			
灯体材质	压铸铝灯体			
灯具寿命	30000Hrs（@LN70/B50)			
工作环境	-20℃~40℃			

上市资料 | 资料获取

信息查阅 》 W 3 文件服务 》上海文件服务器 》产品上市资料 》照明 》室内无主灯

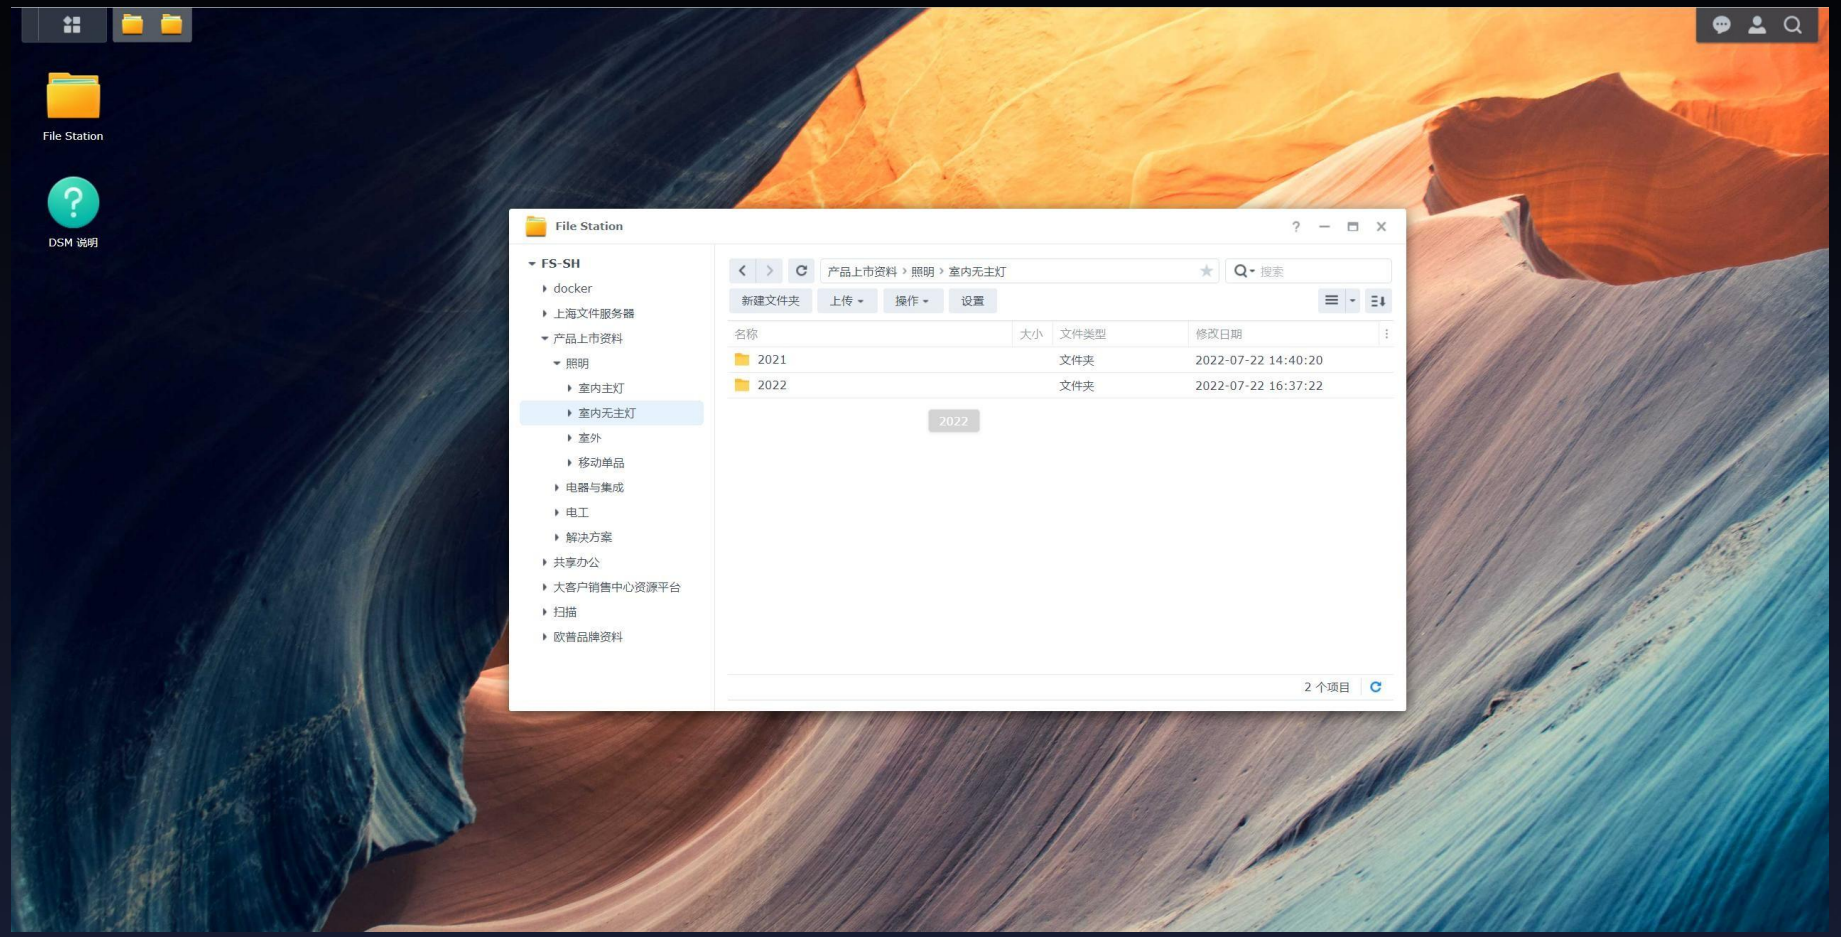



© Copyright 2022 - All rights reserved
This presentation is the intellectual property of Opple Design and is subject to current copyrights. Dissemination, copying, modifying or distribution without our expressed written consent is strictly prohibited. The used images and graphics only serve research and illustration purposes – they are not to be published.