

		Address: 90 Nguyen Tuan Street, Thanh Xuan Hanoi - Vietnam		
Title: Block Diagram				
Size A4	Document Number: 1	Engineer: Manh Ngo Van	Drawn By: Manh Ngo Van	Rev: 1.0
Date: 9/20/2021		Sheet 1 of 3		

BATTERY CHARGER

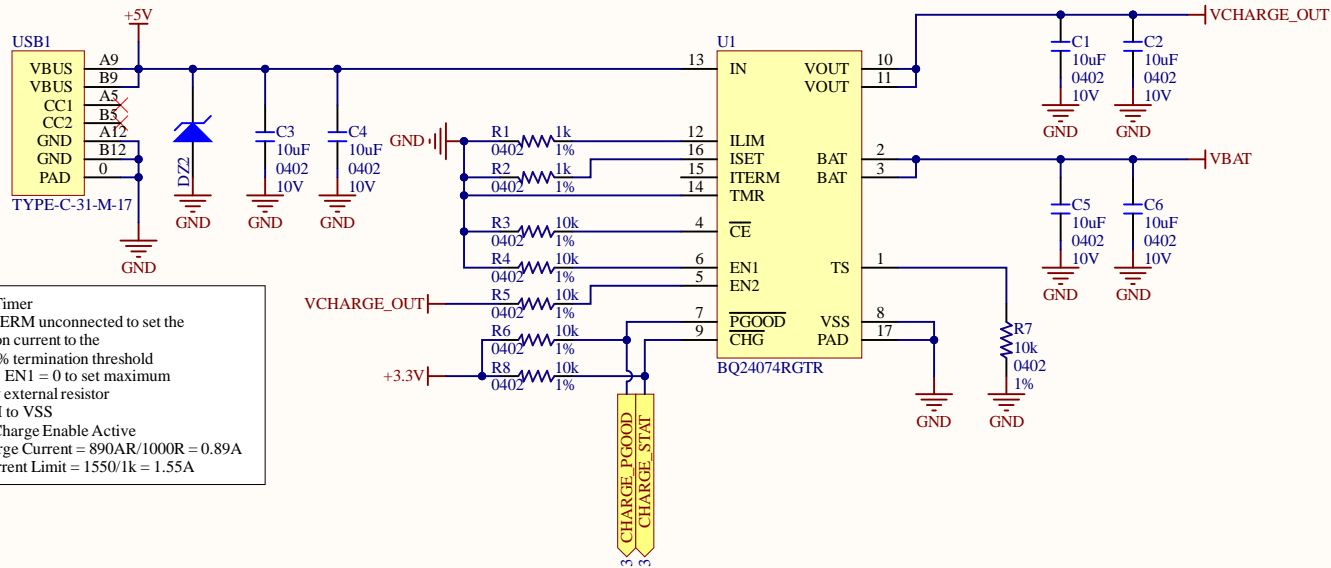


- Disable Timer
- Leave ITERM unconnected to set the termination current to the default 10% termination threshold
- EN2 = 1, EN1 = 0 to set maximum current by external resistor from ILIM to VSS
- CE = 0: Charge Enable Active
- Fast Charge Current = $890\text{AR}/1000\text{R} = 0.89\text{A}$
- input Current Limit = $1550/1\text{k} = 1.55\text{A}$

BAT VOLTAGE SENSING

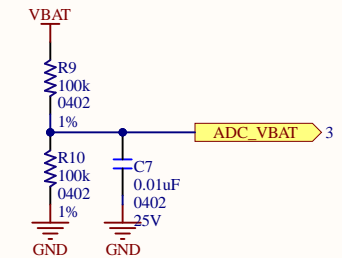

3.3V 1A LDO

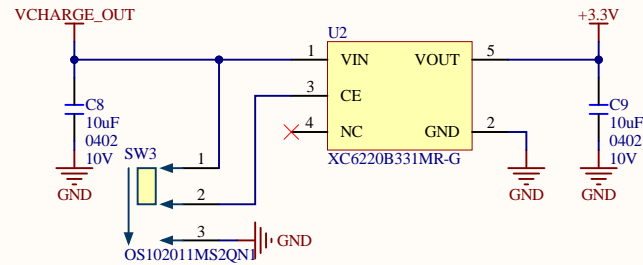

Address: 90 Nguyen Tuan Street, Thanh Xuan
Hanoi - Vietnam

Title: **Power Supply**

Size	Document Number:	Engineer:	Drawn By:	Rev:
A4	2	Manh Ngo Van	Manh Ngo Van	1.0
Date:	9/20/2021	Sheet	2 of 3	

