ESWOOD
PROUDLY AUSTRALIAN MADE

UC25N
UC25NG, UC25NH

Recirculating Undercounter Dishwasher / Glasswasher

- UC25N: Up to 500 plates per hour
- UC25NG: Up to 2000 Glasses per hour
- UC25NDP & UC25NGDP: Models fitted with Drain Pumps
- 3 Wash programs to match degree of soil
- Durable stainless steel wash arms
- Integrated detergent and rinse aid pump
- Full width tank strainers and dual filtration
- Automatic water temperature interlock ensures correct sanitization
- Easy to use electro mechanical controls

FEATURES	BENEFITS
ACCOMODATES 500 x 500MM BASKETS	UP TO 500 x 250MM DIA PLATES PER HOUR UP TO 2000 GLASSES PER HOUR
EASILY REMOVABLE SPRAY ARMS AND FILTERS	REDUCED CONTAMINATION OF WASH WATER WITH SOIL GIVES LOW DETERGENT CONSUMPTION
LOW ENERGY CONSUMPTION	OPERATES FROM SINGLE PHASE 15 AMP ELECTRICAL SUPPLY
DETERGENT AND RINSE AID PUMP FITTED AS STANDARD	INTEGRATED HOSES DROP STRAIGHT INTO CHEMICALS
ALL STAINLESS STEEL CONSTRUCTION	ENSURES RIGIDITY AND DURABILITY
SAFETY CUT-OUT FITTED TO DOOR	ENSURES SAFE OPERATION

HACCP AUSTRALIA FOOD SAFETY PROGRAMME CERTIFICATION

" The *ONLY* HACCP approved Warewashing made in Australia for your protection "

Type Tested

WaterMark

ESWOOD 10-6-2-1 GUARANTEE

- 10 YEARS GUARANTEE OF PARTS AVAILABILITY
- 6 YEARS WARRANTY ON STAINLESS BODY
- 2 YEARS WARRANTY ON WASH PUMP
- 1 YEAR WARRANTY ON PARTS & LABOUR

serving those who serve the best for 100 YEARS 1911 - 2011

1800 013 123

goldsteineswood.com.au

ESWOOD
PROUDLY AUSTRALIAN MADE

UC25N, UC25NG, UC25NH

Recirculating Undercounter Dishwasher / Glasswasher

goldsteineswood.com.au

UC25N 500 x 500 Racks

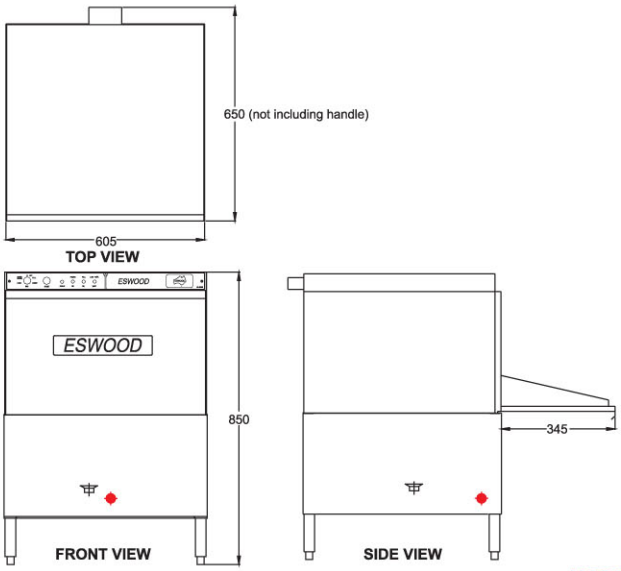

Dishwasher

MODEL: UC25PN Specifications:

Dimensions (WxDxH):	605 x 650 x 850 mm
Depth with door open:	995 mm
Rack Size - NK (WxD):	500 x 500 mm
Weight:	68 kg
Electric Connection:	15A Single Phase - 240V
Rating:	3.6 kW
Water Supply:	65°C / 2-4 bar (28-56 psi)
Packed:	0.3 m³
Meal Service:	30 - 60 pax
Wash Cycle:	60 sec 90 sec 120 sec
Water Consumption:	3.5L Hot Cycle
Tank Capacity:	18L
Detergent Pump:	Fitted
Rinse Aid Injector:	Fitted

Drain 1 1/2" BSP Gravity
Hot water supply 3/4" BSP.

- **UC25NDP: Model with Drain Pump fitted**
- **UC25NH: Model at bench height (Overall Height: 1070mm)**

UC25NG 500 x 500 Racks

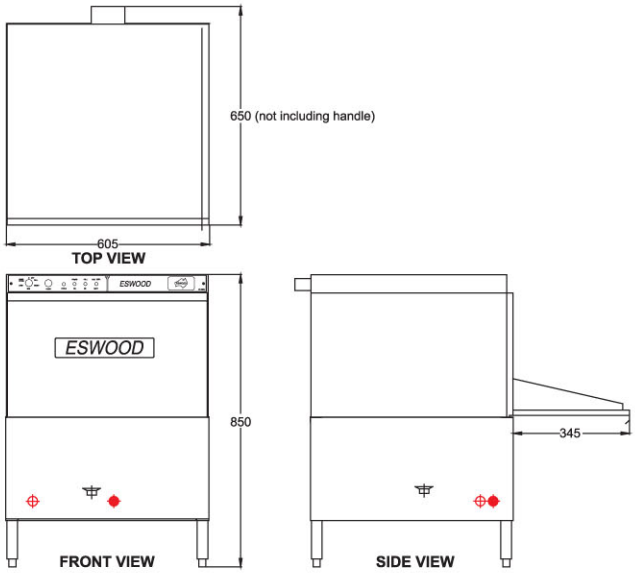

Glasswasher

MODEL: UC25NG Specifications:

Dimensions (WxDxH):	605 x 650 x 850 mm
Depth with door open:	995 mm
Rack Size - NK (WxD):	500 x 500 mm
Weight:	68 kg
Electric Connection:	15A Single Phase - 240V
Rating:	3.5 kW
Water Supply:	65°C / 2-4 bar (28-56 psi)
Packed:	0.3 m³
Service:	1800 glases per hour
Wash Cycle:	60 sec Hot cycle 75 sec Hot & Cold cycle 3 min scrub cycle
Water Consumption:	3.5L Hot cycle 3L Cold cycle
Tank Capacity:	18L
Detergent Pump:	Fitted
Rinse Aid Injector:	Fitted

Drain 1 1/2" BSP Gravity
Hot water supply 3/4" BSP.
Cold water supply 3/4" BSP.

- **UC25NGDP: Model with Drain Pump fitted**

Options

- **Drain Pump: Fitted when gravity drain is not applicable.**
- **Rinse Pump: Fitted when water pressure is below 28 psi.**
- **Temperature Display.**

QEC2900 2 NOVEMBER 2008
Certified System
Quality
Head Office
ISO 9001
SAI GLOBAL

GOLDSTEIN ESWOOD
Established 1911 • Proudly Australian Made

211-217 Woodpark Rd, Smithfield NSW 2164
Telephone: 1800 013 123 Facsimile: (02) 9604 5420
Email: sales@goldsteineswood.com.au

Proudly Distributed By

"Serving those who serve the best for 100 years"

Brochure ID: C42 - 8/12