# HTY505DAUS

## HOOD-TYPE PROFESSIONAL DISHWASHER

500x500 mm basket

## SMEG ECOLINE PROFESSIONAL DISHWASHERS

### Guaranteed wash performance, every time.

In commercial dishwashers, the rinse is the most important part of the wash cycle, as it is the only one performed with clean water. This is the reason why, at Smeg, we believe all commercial dishwashers must have **a rinse pump on board**, the only way to guarantee that optimal and constant pressure and temperature are maintained throughout the rinse cycle.

### We believe in our quality.

All dishwashers are manufactured in our state of the art factory in Italy, where we monitor all phases of design, engineering and production. We believe in our quality and this is the reason why we are pleased to offer **Extended Warranty** on our Ecoline dishwasher range.

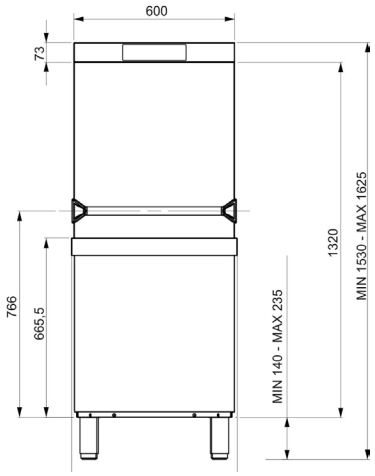


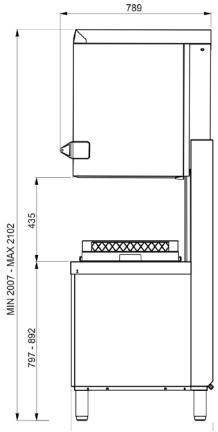


## PRODUCT FEATURES

- Construction in AISI 304 stainless steel
- **HTR (High Temperature Rinse) system with atmospheric boiler and rinse pump**
- 2.5 litres water rinse cycle
- Approximately 15% water exchange every cycle
- Drain pump with triple stage dynamic filtration system
- Door opening height: 440mm
- Electronic controls with 3 wash programs
- Shortest wash program 90 seconds
- Soft start wash pump
- Automatic self-cleaning cycle
- Thermostop system to ensure correct rinse temperature
- Adjustable peristaltic pumps for detergent and rinse-aid injection
- Self-diagnostic system with error messages
- **24 months parts and 12 months labour warranty**

# HTY505DAUS

## HOOD-TYPE PROFESSIONAL DISHWASHER

500x500 mm basket

## TECHNICAL SPECIFICATIONS

| | |
|---|---|
| **Dimensions (mm) (WxDxH)** | 620x736x1530/2102 |
| Basket (mm) | 500x500 |
| Door clearance (mm) | 440 |
| Type of interface | electronic |
| Supplied water temperature (°C) | from cold to 60° |
| Tank volume (litres) | 17 |
| Tank resistance (W) | 2,200 |
| Filtering system | Tank filter + selective filter |
| Boiler volume (litres) | 8 |
| Boiler heating element (W) | 6,000 - 9,000 |
| Wash pump (W) | 700 |
| Tank temperature (°C) | 60° |
| Rinse pump | Yes |
| Rinse temperature (°C) | 85° |
| Adjustable temperatures | Yes |
| Water consumption (litres/cycle) | 2.5 |

| | |
|---|---|
| Minimum supply pressure (bar) | 2.5 |
| Drain pump | Yes |
| Rinse aid pump | Peristaltic |
| Detergent pump | Peristaltic |
| Programme 1 (sec) | 90* |
| Programme 2 (sec) | 150* |
| Programme 3 (sec) | 240* |
| Special programmes | Total renewal of the water inside the tank<br>Extra rinse<br>Self-cleaning |
| Thermostop | Yes |
| Total power (W) | 6,700 - 9,700 |
| Electrical connection | Single Phase (6,700W)<br>Three Phase (6,700 - 9,700 W) |
| Basket number | |
| dishes | 1 x PB50D01 |
| universal / glasses | 1 x PB50G01 |
| cutlery | 1 x PHOOS02 |

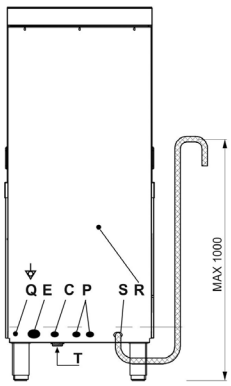


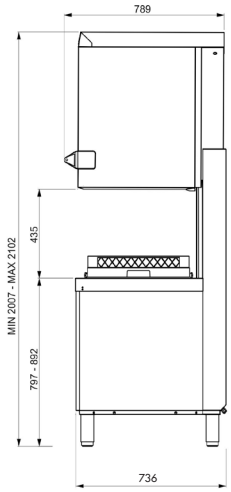


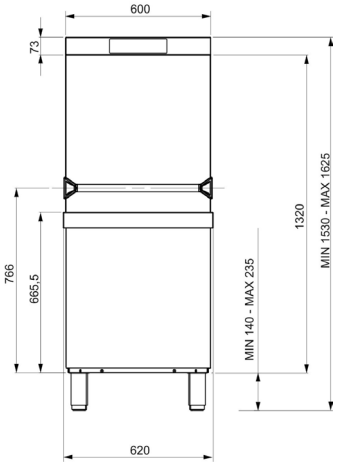


**CONNECTION WIRING DIAGRAM KEY**

| | |
|---|---|
| **R** | Rear lower panel |
| **C** | Water supply tubing |
| **S** | Water drain tubing |
| **Q** | Equipotential terminal |

| | |
|---|---|
| **P** | Peristaltic doser tubes |
| **E** | Electrical power cable |
| **F** | External doser power supply cable input |

* Supplied water temperature >50°C and < 60°C and three-phase electrical connection whenever possible

WaterMark

UNI EN ISO 9001 9130-Smeg
UNI EN ISO 14001 9191-SME2
OHSAS 18001 9192-SME3

All data and descriptions in this document can be changed or cancelled at any time according to technical and commercial needs of the producer; all this without any obligation of notice and without any possibility of claim by the purchaser. Smeg Australia Pty Ltd reserves the right to make any changes deemed necessary for the improvement of its products without prior notice. The illustrations and descriptions contained in this catalogue are therefore not binding and are merely indicative.