**"Twin size"**

## Product Advantages:

- Significantly **less manual pre-cleaning and second runs** by intensiv wash cycle with **steam injection** and **direct injection of detergent**
- **Extra capacity** by side wash: e.g. up to 8 GN-trays 1/1, 5 EN2 container ...
- Ease of operation with **single button operation**, **colour coded status** and **remaining cycle time indication**
- **Easy to clean** and **hygienic safety** by **self cleaning, hygiene cycle** and rounded edges in the wash chamber
- **Double walled housing** for **low noise** level and **energy efficiency**
- **Useable** inside **dimensions** w x d x h: 1110 x 773 x 825 mm
- **No clogging of wash nozzles** by strainer sensor control
- Completely equipped with rinse pressure pump, drain pump and chemical dispensers
- **Integrated prewash** by GENIUS-X² fine filter system: achieving better wash results due to permanent filtration of wash water – **saving energy and detergent**

## Technical Data

| | |
|---|---|
| ① flexible drain hose 2000 mm | 24mm inner / 28mm outer diam. |
| ② fresh water & tank fill<br>2 pressure hoses 1500 mm<br>flow pressure | <br>R 3/4" inside<br>0,5 - 10 bar<br>max. 60°C |
| ③ power cord | 1800 mm |
| ④ chemical suction hoses | 2500 mm each |
| Cycle times | 150 sec.<br>280 sec.<br>420 sec.<br>endless |
| Rinse water consumption | 14 l/ rack |
| Tank capacity | 130 l |
| Tank heating | 6 kW |
| Booster loading | 18 kW |
| Voltage | 400 / 50 / 3 / N |
| Total loading | 24.2 kW<br>3 x 50 A |
| Pump capacity | 2 x 2.7 kW<br>2 x 1150 l/min. |
| Noise level | 67 dB(A) |
| Weight | ~305 kg |

Drawing shows optional steam heat recovery

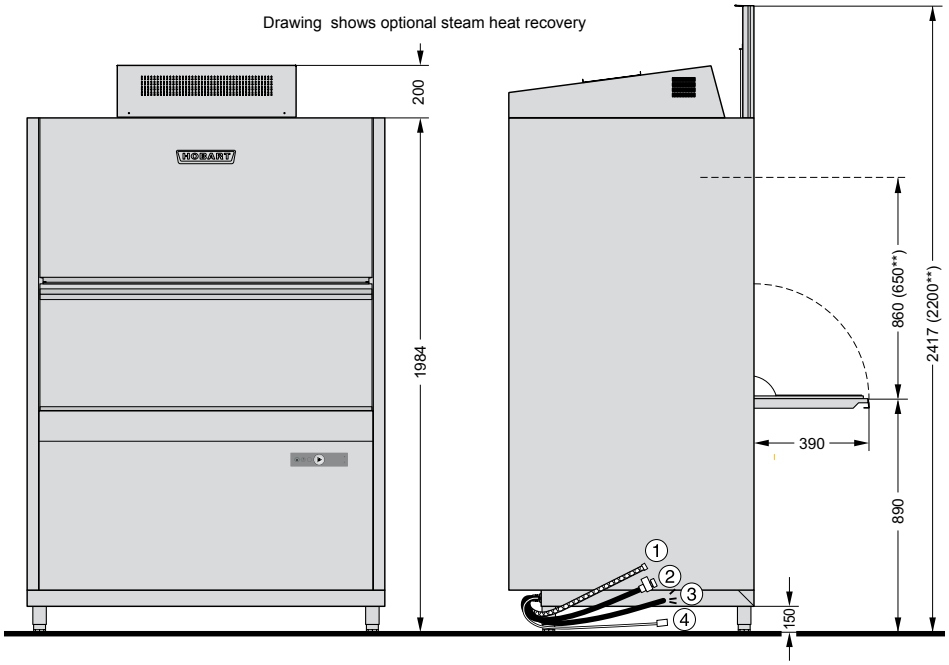


** Door opening can be limitted to 2200mm

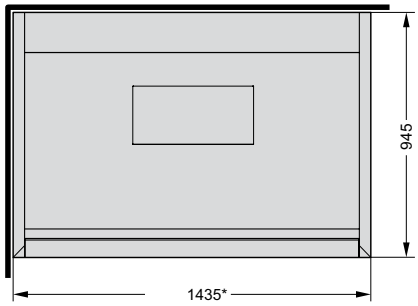


**± 15 mm adjustable feet**
**For transport the depth can be reduced to 870mm**

Water hardness should not exceed 3°dH, if higher we recommend using a water softener.
If mineral content is high a demineraliser may be advisable.